



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 521

ProLiant BL465c Gen8
(2.40 GHz AMD Opteron 6278)

SPECint_rate_base2006 = 454

CPU2006 license: 3


Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

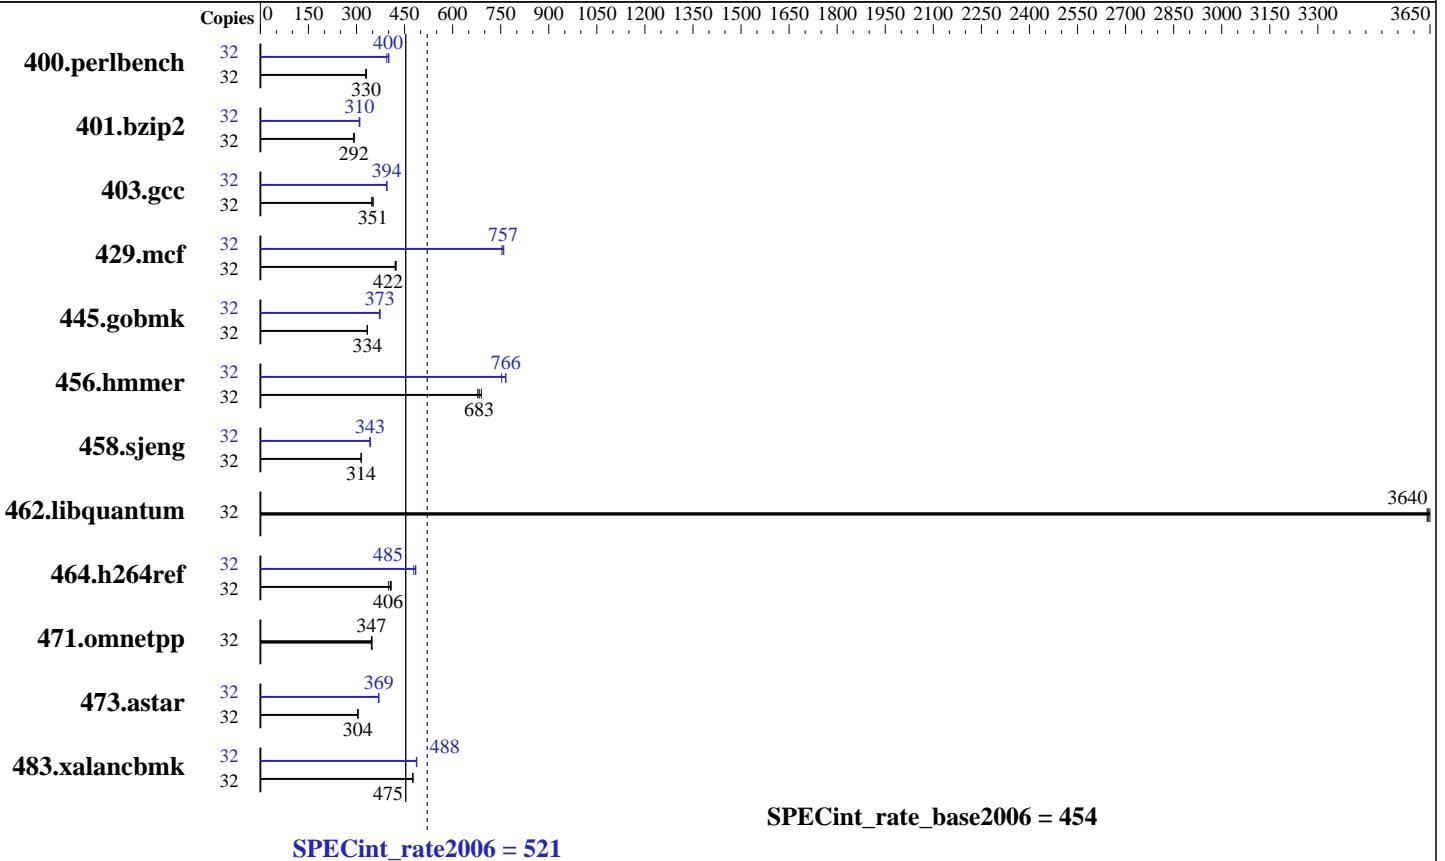

Hardware

CPU Name: AMD Opteron 6278
 CPU Characteristics: AMD Turbo CORE technology up to 3.30 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 512 KB I on chip per chip,
 64 KB I shared / 2 cores;
 16 KB D on chip per core
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 146 GB 15 K SAS
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2,
 Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 4.5.1 of
 x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 521

ProLiant BL465c Gen8
(2.40 GHz AMD Opteron 6278)

SPECint_rate_base2006 = 454

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	950	329	948	330	945	331	32	792	395	780	401	781	400
401.bzip2	32	1054	293	1059	292	1057	292	32	997	310	995	310	1001	308
403.gcc	32	732	352	733	351	741	347	32	652	395	655	393	653	394
429.mcf	32	688	424	694	420	692	422	32	387	754	384	760	385	757
445.gobmk	32	1006	334	1005	334	1006	334	32	901	373	901	373	900	373
456.hammer	32	433	690	437	683	440	678	32	397	753	390	766	390	766
458.sjeng	32	1232	314	1227	316	1232	314	32	1132	342	1128	343	1130	343
462.libquantum	32	182	3640	182	3650	182	3640	32	182	3640	182	3650	182	3640
464.h264ref	32	1734	408	1744	406	1769	400	32	1461	485	1461	485	1479	479
471.omnetpp	32	574	348	576	347	577	346	32	574	348	576	347	577	346
473.astar	32	738	305	738	304	739	304	32	608	369	608	369	609	369
483.xalancbmk	32	465	475	465	475	463	476	32	453	488	454	487	453	488

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=28672 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

BIOS configuration:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling
System Locality Information Table to Disabled
Minimum Processor Idle Power Cle State to Enabled



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 521

ProLiant BL465c Gen8
(2.40 GHz AMD Opteron 6278)

SPECint_rate_base2006 = 454

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/cpu2006/amd1104-rate-libs-revC/32:/cpu2006/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1

Base Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON
-IPA:plimit=8000 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso
-LNO:prefetch=2

C++ benchmarks:

-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 521

ProLiant BL465c Gen8
(2.40 GHz AMD Opteron 6278)

SPECint_rate_base2006 = 454

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
-IPA:plimit=20000 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
-CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
-OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
-HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
-HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
-INLINE:aggressive=on -CG:gcm=off -CG:dsched=on
-GRA:prioritize_by_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
-OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 521

ProLiant BL465c Gen8
(2.40 GHz AMD Opteron 6278)

SPECint_rate_base2006 = 454

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

445.gobmk (continued):

-LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2

-OPT:alias=disjoint -OPT:unroll_times_max=16

-OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on

-CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off

-HP:bd=2m:heap=2m

458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0

-CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on

-LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:heap=2m:bd=2m

-WOPT:sib=on

462.libquantum: basepeak = yes

464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256

-OPT:unroll_times_max=2 -IPA:plimit=20000

-OPT:alias=disjoint -CG:ptr_load_use=0

-CG:local_sched_alg=1 -HP:bd=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off

-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on

-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on

-OPT:alias=disjoint -INLINE:aggressive=on

-IPA:small_pu=3000 -IPA:plimit=3000 -m32

-HP:bd=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512

-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET

-INLINE:aggressive=on -m32 -CG:cmp_peep=on

-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on

-TENV:frame_pointer=off -fno-emit-exceptions

-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-A.20120703.html>

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-A.20120703.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.xml>

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 5



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 521

ProLiant BL465c Gen8
(2.40 GHz AMD Opteron 6278)

SPECint_rate_base2006 = 454

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 09:45:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 July 2012.