



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint®_rate2006 = 582

SuperBlade SBI-7127RG (B9DRG, Intel E5-2660)

SPECint_rate_base2006 = 556

CPU2006 license: 001176


Test date: Jun-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Dec-2011

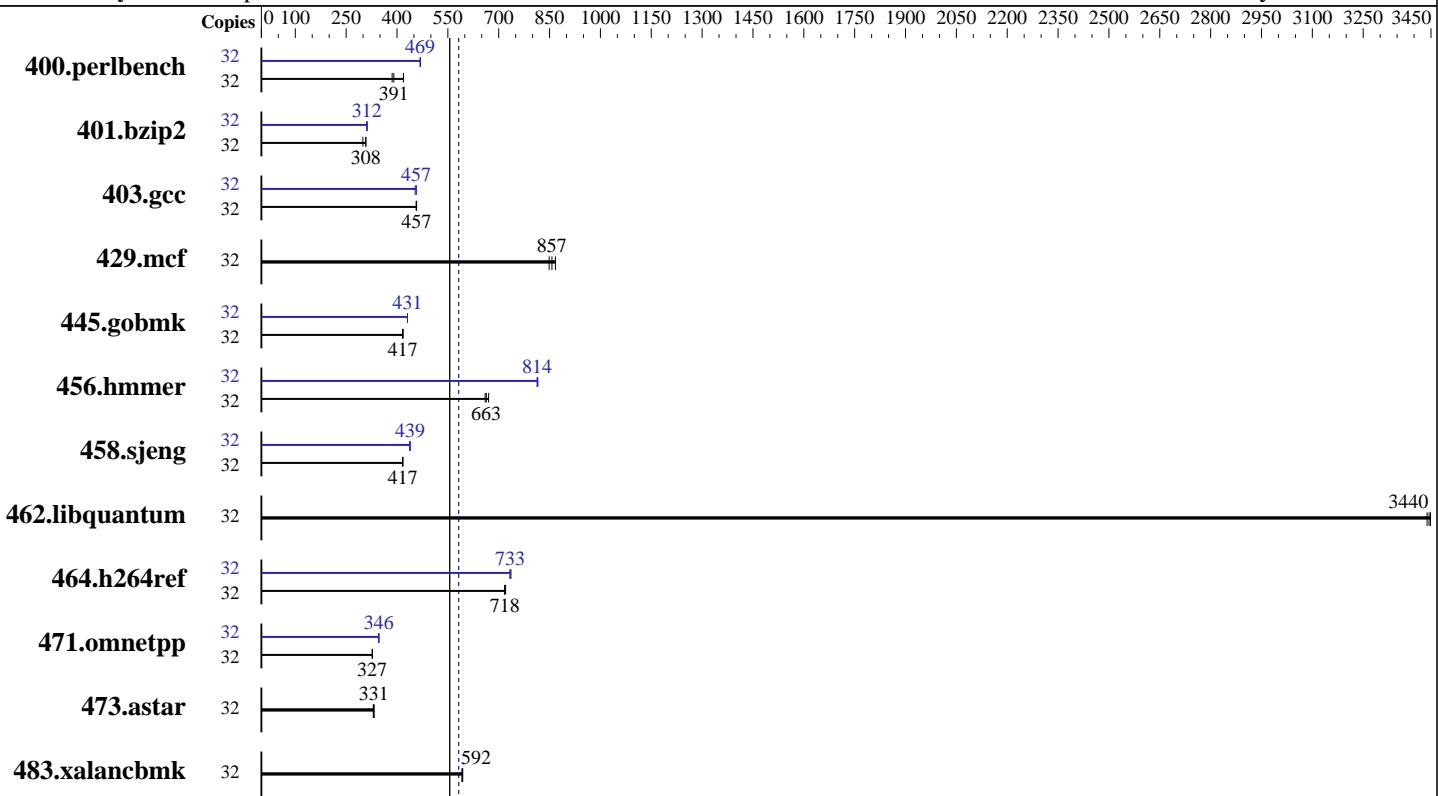

SPECint_rate_base2006 = 556

SPECint_rate2006 = 582

Hardware

CPU Name:	Intel Xeon E5-2660
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 500 GB SATA II, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server Release 6.2, Kernel 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 582

SuperBlade SBI-7127RG (B9DRG, Intel E5-2660)

SPECint_rate_base2006 = 556

CPU2006 license: 001176

Test date: Jun-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	746	419	811	386	800	391	32	667	469	667	469	667	469
401.bzip2	32	1002	308	1002	308	1031	299	32	989	312	991	312	994	311
403.gcc	32	564	457	563	457	563	458	32	564	457	564	457	568	454
429.mcf	32	341	857	336	867	344	849	32	341	857	336	867	344	849
445.gobmk	32	805	417	803	418	805	417	32	779	431	779	431	779	431
456.hammer	32	445	670	450	663	452	660	32	366	816	367	814	367	814
458.sjeng	32	928	417	929	417	929	417	32	882	439	883	439	886	437
462.libquantum	32	192	3450	193	3440	193	3440	32	192	3450	193	3440	193	3440
464.h264ref	32	987	717	986	718	983	720	32	962	736	965	733	966	733
471.omnetpp	32	611	327	610	328	611	327	32	576	347	578	346	578	346
473.astar	32	681	330	678	331	676	333	32	681	330	678	331	676	333
483.xalancbmk	32	373	592	372	594	373	592	32	373	592	372	594	373	592

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/spec/libs/32:/home/spec/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperBlade SBI-7127RG (B9DRG, Intel E5-2660)

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

SPECint_rate2006 = 582

SPECint_rate_base2006 = 556

Test date: Jun-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:

 icc -m32

C++ benchmarks:

 icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

 -xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

 -xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
 -Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:

 403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

 icc -m32

400.perlbench: icc -m64

 401.bzip2: icc -m64

 456.hmmer: icc -m64

 458.sjeng: icc -m64

C++ benchmarks:

 icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperBlade SBI-7127RG (B9DRG, Intel E5-2660)

SPECint_rate2006 = 582

SPECint_rate_base2006 = 556

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperBlade SBI-7127RG (B9DRG, Intel E5-2660)

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

SPECint_rate2006 = 582

SPECint_rate_base2006 = 556

Test date: Jun-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 12:38:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 July 2012.