



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS23E
(Intel Xeon E5-2428L, 1.80 GHz)

SPECint®_rate2006 = 307

SPECint_rate_base2006 = 294

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

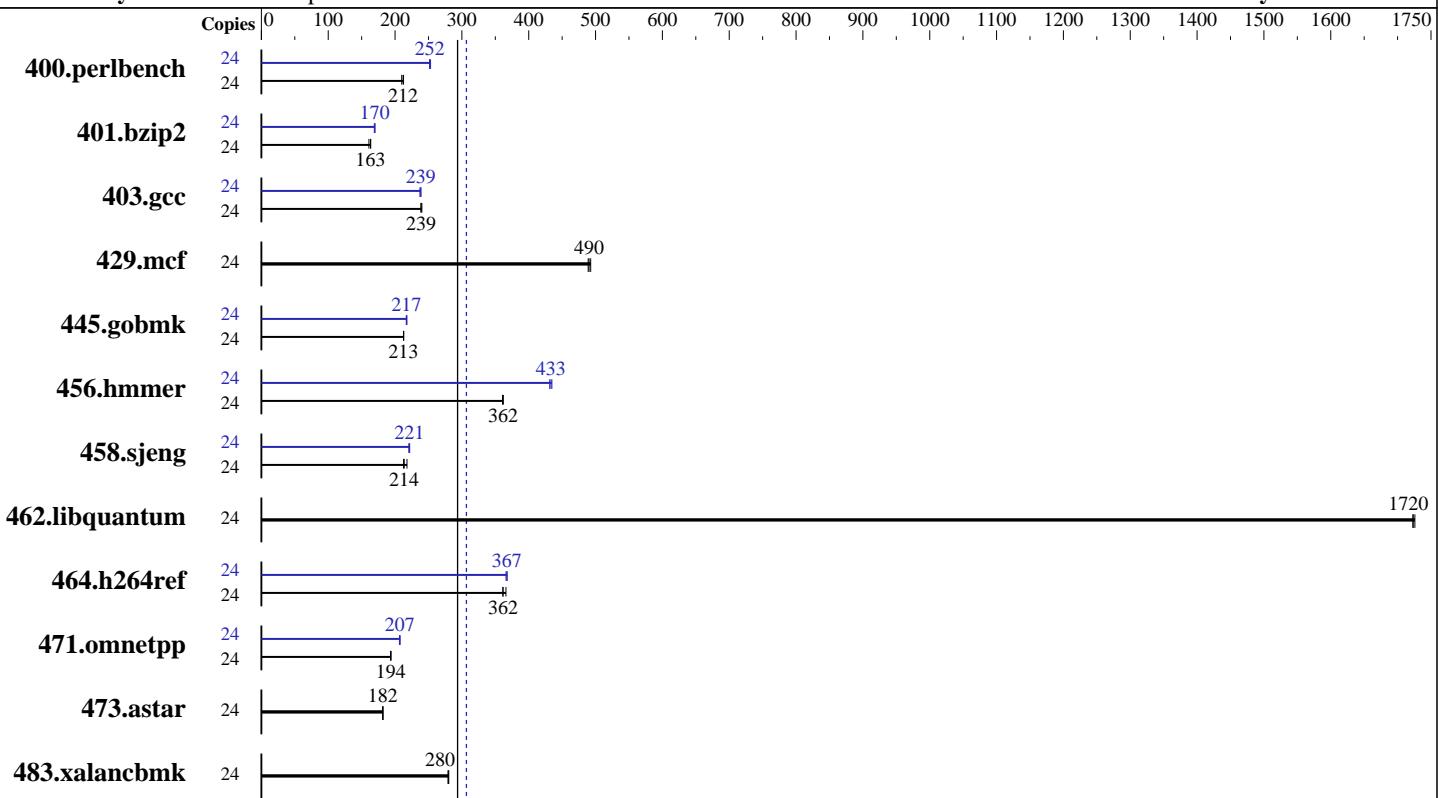

SPECint_rate_base2006 = 294

SPECint_rate2006 = 307

Hardware

CPU Name:	Intel Xeon E5-2428L
CPU Characteristics:	Intel Turbo Boost Technology up to 2.00 GHz
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
Disk Subsystem:	1 x 300 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS23E
(Intel Xeon E5-2428L, 1.80 GHz)

SPECint_rate2006 = 307

SPECint_rate_base2006 = 294

CPU2006 license: 11

Test date: Jun-2012

Test sponsor: IBM Corporation

Hardware Availability: Jun-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	1102	213	1117	210	1106	212	24	931	252	932	252	926	253
401.bzip2	24	1417	163	1439	161	1417	163	24	1366	170	1362	170	1371	169
403.gcc	24	809	239	809	239	805	240	24	810	239	814	237	810	239
429.mcf	24	444	493	446	490	448	489	24	444	493	446	490	448	489
445.gobmk	24	1184	213	1183	213	1183	213	24	1159	217	1161	217	1156	218
456.hammer	24	619	362	619	362	621	361	24	515	435	519	431	517	433
458.sjeng	24	1365	213	1359	214	1333	218	24	1312	221	1309	222	1316	221
462.libquantum	24	288	1730	289	1720	289	1720	24	288	1730	289	1720	289	1720
464.h264ref	24	1469	362	1451	366	1470	361	24	1445	368	1445	367	1451	366
471.omnetpp	24	774	194	775	194	775	194	24	723	207	726	207	724	207
473.astar	24	928	182	927	182	926	182	24	928	182	927	182	926	182
483.xalancbmk	24	593	279	592	280	591	280	24	593	279	592	280	591	280

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Operating Mode set to Maximum Performance in BIOS
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date::: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3
running on angleshark-pete Tue Jun 26 15:18:52 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2428L 0 @ 1.80GHz
        2 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS23E
(Intel Xeon E5-2428L, 1.80 GHz)

SPECint_rate2006 = 307

SPECint_rate_base2006 = 294

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Platform Notes (Continued)

```
siblings : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

From /proc/meminfo
MemTotal:      99042356 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux angleshark-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST
2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 26 14:51

SPEC is set to: /cpu2006.1.2
Filesystem      Type    Size  Used Avail Use% Mounted on
/dev/mapper/vg_anglesharkpet-lv_root
              ext4    265G   36G  217G  15%  /


Additional information from dmidecode:
Memory:
 6x Micron 36JDYS1G72PZ-1G6M1 8 GB 1600 MHz 2 rank
 6x Samsung M392B1K70DM0-CK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/lib/32:/cpu2006.1.2/lib/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enable
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS23E
(Intel Xeon E5-2428L, 1.80 GHz)

SPECint_rate2006 = 307

SPECint_rate_base2006 = 294

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/smartheap -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS23E
(Intel Xeon E5-2428L, 1.80 GHz)

SPECint_rate2006 = 307

SPECint_rate_base2006 = 294

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
  -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -unroll12 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
  -L/smartheap -lsmartheap

473.astar: basepeak = yes
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS23E
(Intel Xeon E5-2428L, 1.80 GHz)

SPECint_rate2006 = 307

SPECint_rate_base2006 = 294

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=__alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 10:06:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 July 2012.