



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 396

PowerEdge M820 (Intel Xeon E5-4603, 2.00 GHz)

SPECfp_rate_base2006 = 387

CPU2006 license: 55


Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

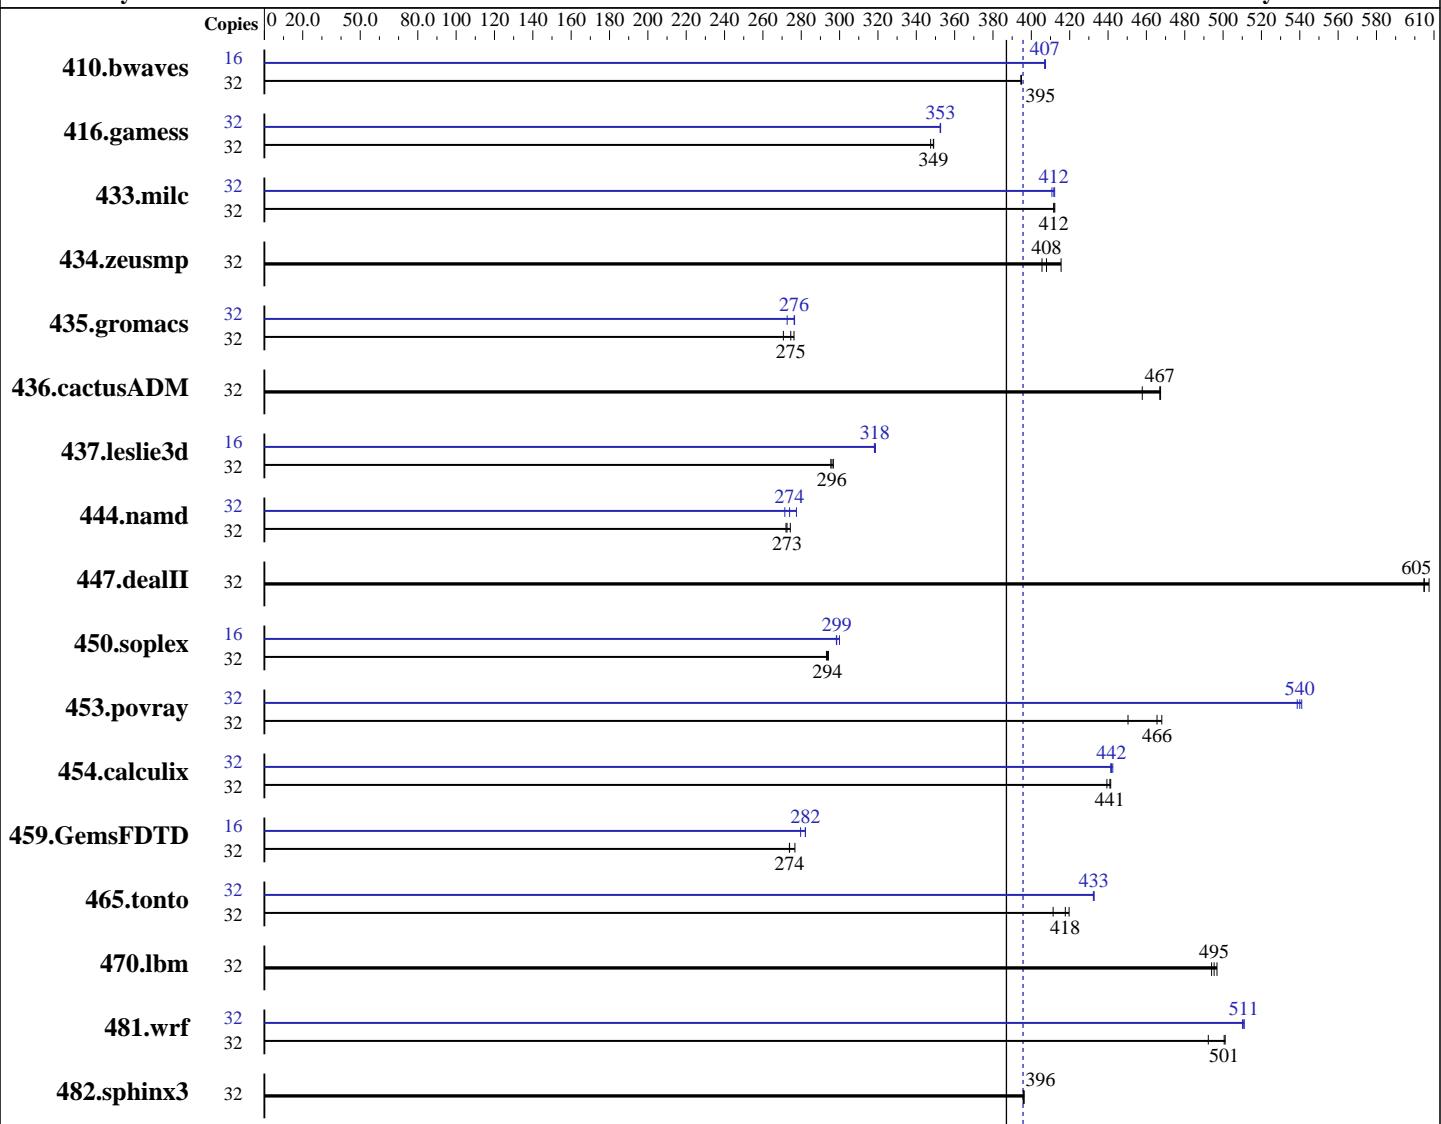

SPECfp_rate_base2006 = 387

SPECfp_rate2006 = 396

Hardware

CPU Name: Intel Xeon E5-4603
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64)
 3.0.13-0.27-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE
 for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran
 Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 396

PowerEdge M820 (Intel Xeon E5-4603, 2.00 GHz)

SPECfp_rate_base2006 = 387

CPU2006 license: 55

Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1067 MHz)
 Disk Subsystem: 1 x 900 GB 10000 RPM SAS
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

| Benchmark | Base | | | | | | | | Peak | | | | | | | |
|---------------|--------|--------------------|-------------------|--------------------|-------------------|--------------------|-------------------|--------|--------------------|-------------------|--------------------|-------------------|-------------------|-------------------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 32 | 1102 | 395 | <u>1102</u> | <u>395</u> | 1101 | 395 | 16 | <u>534</u> | <u>407</u> | 534 | 407 | 534 | 407 | 534 | 407 |
| 416.gamess | 32 | 1795 | 349 | 1803 | 347 | <u>1796</u> | <u>349</u> | 32 | 1776 | 353 | <u>1777</u> | <u>353</u> | 1778 | 352 | 1778 | 352 |
| 433.milc | 32 | 713 | 412 | 714 | 412 | <u>713</u> | <u>412</u> | 32 | 715 | 411 | <u>714</u> | <u>412</u> | 713 | 412 | 713 | 412 |
| 434.zeusmp | 32 | <u>714</u> | <u>408</u> | 718 | 406 | 701 | 416 | 32 | <u>714</u> | <u>408</u> | 718 | 406 | 701 | 416 | 701 | 416 |
| 435.gromacs | 32 | 827 | 276 | 844 | 271 | <u>832</u> | <u>275</u> | 32 | <u>827</u> | <u>276</u> | 838 | 273 | 826 | 277 | 826 | 277 |
| 436.cactusADM | 32 | 835 | 458 | 818 | 467 | <u>819</u> | <u>467</u> | 32 | 835 | 458 | 818 | 467 | <u>819</u> | <u>467</u> | 819 | 467 |
| 437.leslie3d | 32 | 1014 | 297 | 1018 | 295 | <u>1016</u> | <u>296</u> | 16 | <u>472</u> | <u>318</u> | 473 | 318 | 472 | 319 | 472 | 319 |
| 444.namd | 32 | <u>942</u> | <u>273</u> | 936 | 274 | 943 | 272 | 32 | 925 | 277 | 946 | 271 | <u>937</u> | <u>274</u> | 937 | 274 |
| 447.dealII | 32 | <u>605</u> | <u>605</u> | 603 | 607 | 605 | 605 | 32 | <u>605</u> | <u>605</u> | 603 | 607 | 605 | 605 | 605 | 605 |
| 450.soplex | 32 | <u>909</u> | <u>294</u> | 907 | 294 | 910 | 293 | 16 | 445 | 300 | <u>447</u> | <u>299</u> | 447 | 298 | 447 | 298 |
| 453.povray | 32 | 378 | 450 | <u>366</u> | <u>466</u> | 364 | 468 | 32 | 316 | 539 | 315 | 541 | <u>315</u> | <u>540</u> | 315 | 540 |
| 454.calculix | 32 | 601 | 439 | <u>599</u> | <u>441</u> | 598 | 441 | 32 | <u>598</u> | <u>442</u> | 598 | 441 | 597 | 442 | 597 | 442 |
| 459.GemsFDTD | 32 | <u>1240</u> | <u>274</u> | 1227 | 277 | 1240 | 274 | 16 | 607 | 280 | 602 | 282 | <u>602</u> | <u>282</u> | 602 | 282 |
| 465.tonto | 32 | 765 | 411 | <u>754</u> | <u>418</u> | 750 | 420 | 32 | <u>728</u> | <u>433</u> | 728 | 433 | 728 | 432 | 728 | 432 |
| 470.lbm | 32 | <u>888</u> | <u>495</u> | 890 | 494 | 885 | 497 | 32 | <u>888</u> | <u>495</u> | 890 | 494 | 885 | 497 | 885 | 497 |
| 481.wrf | 32 | 726 | 492 | <u>714</u> | <u>501</u> | 713 | 501 | 32 | <u>700</u> | <u>511</u> | 699 | 511 | 701 | 510 | 701 | 510 |
| 482.sphinx3 | 32 | <u>1576</u> | <u>396</u> | 1576 | 396 | 1574 | 396 | 32 | <u>1576</u> | <u>396</u> | 1576 | 396 | 1574 | 396 | 1574 | 396 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 396

PowerEdge M820 (Intel Xeon E5-4603, 2.00 GHz)

SPECfp_rate_base2006 = 387

CPU2006 license: 55

Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Platform Notes

CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost set to Enabled
C States/C1E set to Enabled
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on linux-0j3r Sat May 12 03:16:49 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4603 0 @ 2.00GHz
        4 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings   : 8
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
physical 2: cores 0 1 2 3
physical 3: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      264501520 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2

uname -a:
Linux linux-0j3r 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
(d73692b) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 11 10:13 last=S
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdal      ext3  886G  160G  682G  19%  /
```

Additional information from dmidecode:
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 396

PowerEdge M820 (Intel Xeon E5-4603, 2.00 GHz)

SPECfp_rate_base2006 = 387

CPU2006 license: 55

Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4603, 2.00 GHz)

SPECfp_rate2006 = 396

CPU2006 license: 55

Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Base Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 396

PowerEdge M820 (Intel Xeon E5-4603, 2.00 GHz)

SPECfp_rate_base2006 = 387

CPU2006 license: 55

Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
           -opt-mem-layout-trans=3

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static

```

```

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
           -inline-level=0 -scalar-rep- -static

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4603, 2.00 GHz)

SPECfp_rate2006 = 396

CPU2006 license: 55

Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:16:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 August 2012.