



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®2006 = 47.9

NovaScale T820 F3 (Intel Xeon E5-2470, 2.30 GHz)

SPECint_base2006 = 45.0

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

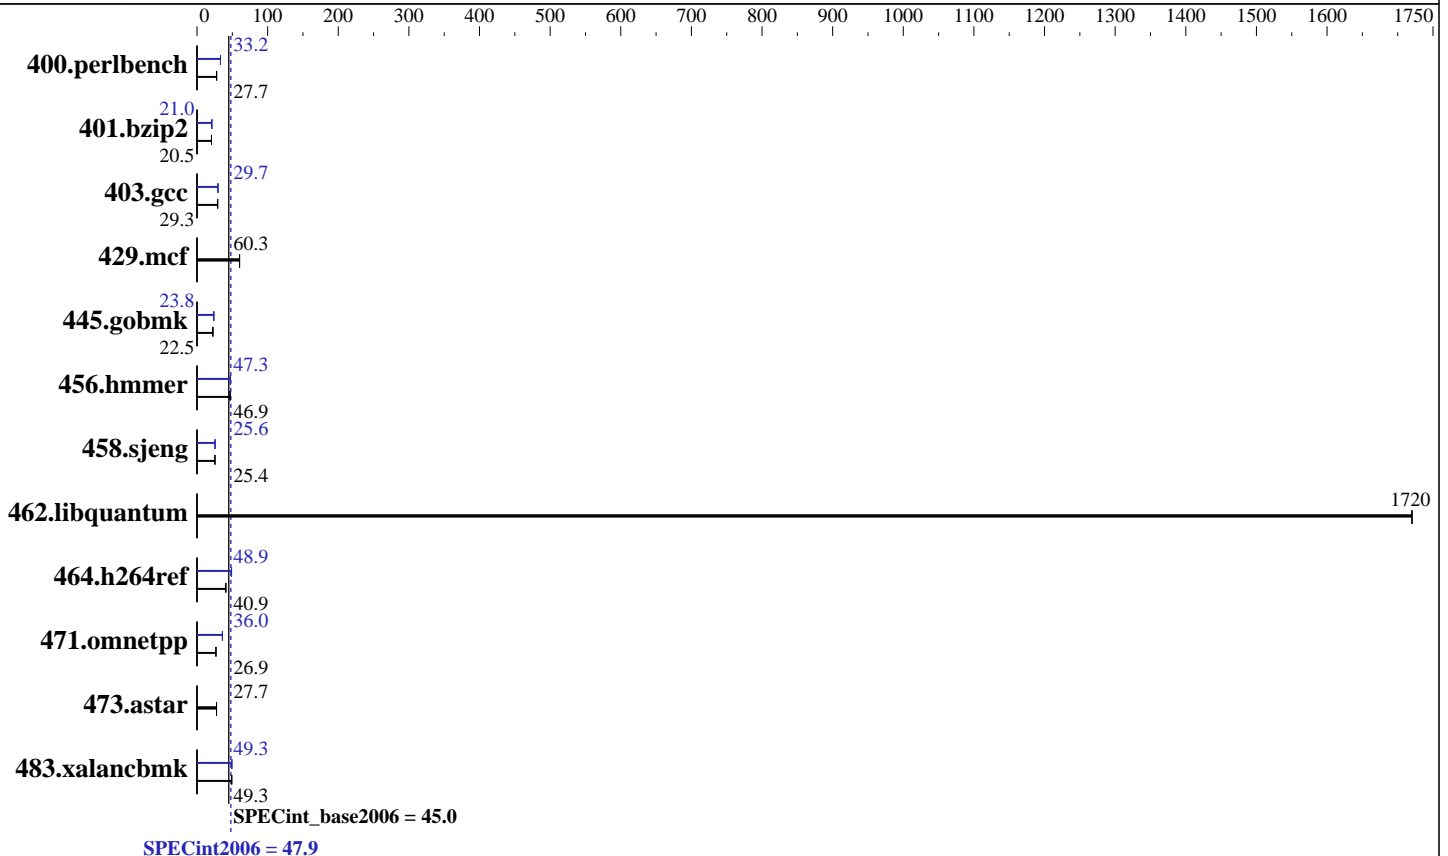

Hardware

CPU Name: Intel Xeon E5-2470
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP2(x86_64) 3.0.13-0.27-default
 Compiler: C/C++; Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = **47.9**

NovaScale T820 F3 (Intel Xeon E5-2470, 2.30 GHz)

SPECint_base2006 = **45.0**

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Apr-2012
Hardware Availability: Jun-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	350	27.9	353	27.7	352	27.7	294	33.3	294	33.2	294	33.2
401.bzip2	470	20.5	470	20.5	472	20.5	460	21.0	460	21.0	460	21.0
403.gcc	275	29.3	276	29.2	275	29.3	272	29.6	271	29.7	271	29.7
429.mcf	151	60.3	151	60.3	151	60.2	151	60.3	151	60.3	151	60.2
445.gobmk	466	22.5	466	22.5	466	22.5	440	23.8	441	23.8	441	23.8
456.hammer	199	46.9	200	46.7	199	46.9	197	47.3	197	47.3	197	47.3
458.sjeng	477	25.4	478	25.3	477	25.4	473	25.6	474	25.5	473	25.6
462.libquantum	12.0	1720	12.0	1720	12.0	1720	12.0	1720	12.0	1720	12.0	1720
464.h264ref	540	41.0	541	40.9	547	40.5	453	48.9	452	49.0	453	48.9
471.omnetpp	232	26.9	233	26.9	235	26.6	174	35.9	174	36.0	174	36.0
473.astar	254	27.6	254	27.7	253	27.7	254	27.6	254	27.7	253	27.7
483.xalancbmk	140	49.3	140	49.3	142	48.7	140	49.3	140	49.4	140	49.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```

CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost set to Enabled
C States/C1E set to Enabled
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on T320 Sun Apr 22 19:56:26 2012

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2470 0 @ 2.30GHz
1 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 47.9

NovaScale T820 F3 (Intel Xeon E5-2470, 2.30 GHz)

SPECint_base2006 = 45.0

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Platform Notes (Continued)

```

From /proc/meminfo
MemTotal:      49381732 kB
HugePages_Total:    0
Hugepagesize:   2048 kB

/usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 11 (x86_64)
    VERSION = 11
    PATCHLEVEL = 2

uname -a:
    Linux T320 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012 (d73692b)
    x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 22 19:55 last=S

SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext3  226G  11G  204G   5% /

Additional information from dmidecode:

(End of data from sysinfo program)

```

General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"
OMP_NUM_THREADS = "8"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
The Dell PowerEdge T320 and
the Bull NovaScale T820 F3 models are electronically equivalent.
The results have been measured on a Dell PowerEdge T320 model



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 47.9

NovaScale T820 F3 (Intel Xeon E5-2470, 2.30 GHz)

SPECint_base2006 = 45.0

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Apr-2012
Hardware Availability: Jun-2012
Software Availability: Feb-2012

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 47.9

NovaScale T820 F3 (Intel Xeon E5-2470, 2.30 GHz)

SPECint_base2006 = 45.0

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias`

401.bzip2: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xAVX -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias`

456.hmmer: `-xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 47.9

NovaScale T820 F3 (Intel Xeon E5-2470, 2.30 GHz)

SPECint_base2006 = 45.0

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 09:23:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 July 2012.