



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®\_rate2006 = 811

PowerEdge M820 (Intel Xeon E5-4640, 2.40 GHz)

SPECfp\_rate\_base2006 = 789

CPU2006 license: 55


Test date: Apr-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

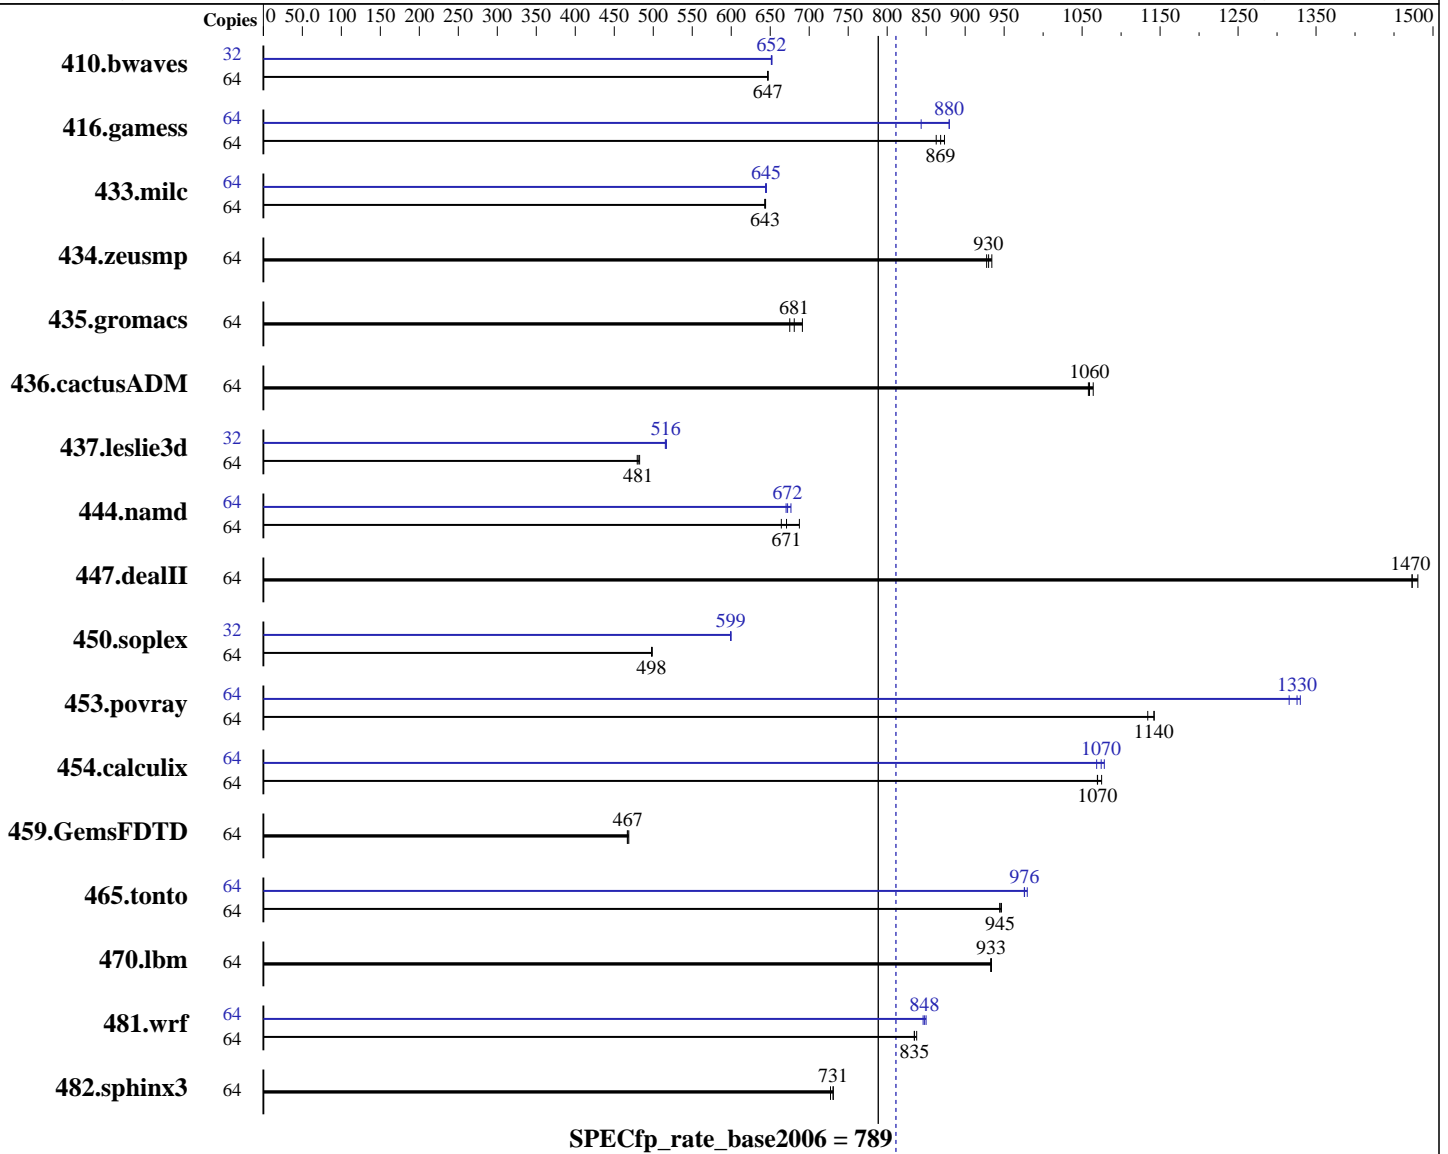

### Hardware

CPU Name: Intel Xeon E5-4640  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64) 3.0.13-0.27-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 811

PowerEdge M820 (Intel Xeon E5-4640, 2.40 GHz)

SPECfp\_rate\_base2006 = 789

CPU2006 license: 55

Test date: Apr-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 900 GB 10000 RPM SAS  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	<b>1345</b>	<b>647</b>	1343	647	1345	647	32	667	652	<b>667</b>	<b>652</b>	667	652
416.gamess	64	1452	863	1435	873	<b>1443</b>	<b>869</b>	64	1485	844	1425	880	<b>1425</b>	<b>880</b>
433.milc	64	<b>913</b>	<b>643</b>	914	643	912	644	64	912	644	<b>911</b>	<b>645</b>	911	645
434.zeusmp	64	623	934	628	928	<b>626</b>	<b>930</b>	64	623	934	628	928	<b>626</b>	<b>930</b>
435.gromacs	64	661	691	<b>671</b>	<b>681</b>	677	675	64	661	691	<b>671</b>	<b>681</b>	677	675
436.cactusADM	64	719	1060	<b>722</b>	<b>1060</b>	723	1060	64	719	1060	<b>722</b>	<b>1060</b>	723	1060
437.leslie3d	64	1255	479	<b>1252</b>	<b>481</b>	1247	483	32	<b>583</b>	<b>516</b>	582	517	584	515
444.namd	64	747	687	<b>765</b>	<b>671</b>	773	664	64	766	670	759	677	<b>763</b>	<b>672</b>
447.dealII	64	497	1470	<b>497</b>	<b>1470</b>	495	1480	64	497	1470	<b>497</b>	<b>1470</b>	495	1480
450.soplex	64	1072	498	1070	499	<b>1072</b>	<b>498</b>	32	<b>445</b>	<b>599</b>	445	599	445	600
453.povray	64	<b>298</b>	<b>1140</b>	300	1130	298	1140	64	256	1330	259	1320	<b>257</b>	<b>1330</b>
454.calculix	64	491	1080	<b>494</b>	<b>1070</b>	494	1070	64	<b>491</b>	<b>1070</b>	494	1070	490	1080
459.GemsFDTD	64	1455	467	<b>1453</b>	<b>467</b>	1449	469	64	1455	467	<b>1453</b>	<b>467</b>	1449	469
465.tonto	64	665	947	667	944	<b>666</b>	<b>945</b>	64	645	976	643	980	<b>645</b>	<b>976</b>
470.lbm	64	942	934	943	933	<b>942</b>	<b>933</b>	64	942	934	943	933	<b>942</b>	<b>933</b>
481.wrf	64	<b>856</b>	<b>835</b>	856	835	853	838	64	841	850	<b>843</b>	<b>848</b>	845	846
482.sphinx3	64	1707	731	1715	727	<b>1707</b>	<b>731</b>	64	1707	731	1715	727	<b>1707</b>	<b>731</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost set to Enabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 811

PowerEdge M820 (Intel Xeon E5-4640, 2.40 GHz)

SPECfp\_rate\_base2006 = 789

CPU2006 license: 55

Test date: Apr-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Platform Notes (Continued)

C States/C1E set to Enabled  
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on linux-0j3r Fri Apr 27 20:46:20 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4640 0 @ 2.40GHz
 4 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal: 264501520 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux linux-0j3r 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
(d73692b) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 27 06:29 last=S
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdal ext3 886G 160G 682G 19% /
```

Additional information from dmidecode:

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 811

PowerEdge M820 (Intel Xeon E5-4640, 2.40 GHz)

SPECfp\_rate\_base2006 = 789

CPU2006 license: 55

Test date: Apr-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 811

PowerEdge M820 (Intel Xeon E5-4640, 2.40 GHz)

SPECfp\_rate\_base2006 = 789

CPU2006 license: 55

Test date: Apr-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 811

PowerEdge M820 (Intel Xeon E5-4640, 2.40 GHz)

SPECfp\_rate\_base2006 = 789

CPU2006 license: 55

Test date: Apr-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Peak Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
 -inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 811

PowerEdge M820 (Intel Xeon E5-4640, 2.40 GHz)

SPECfp\_rate\_base2006 = 789

CPU2006 license: 55

Test date: Apr-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 11:13:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 August 2012.