



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6386 SE

SPECint®_rate2006 = 619

SPECint_rate_base2006 = 536

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

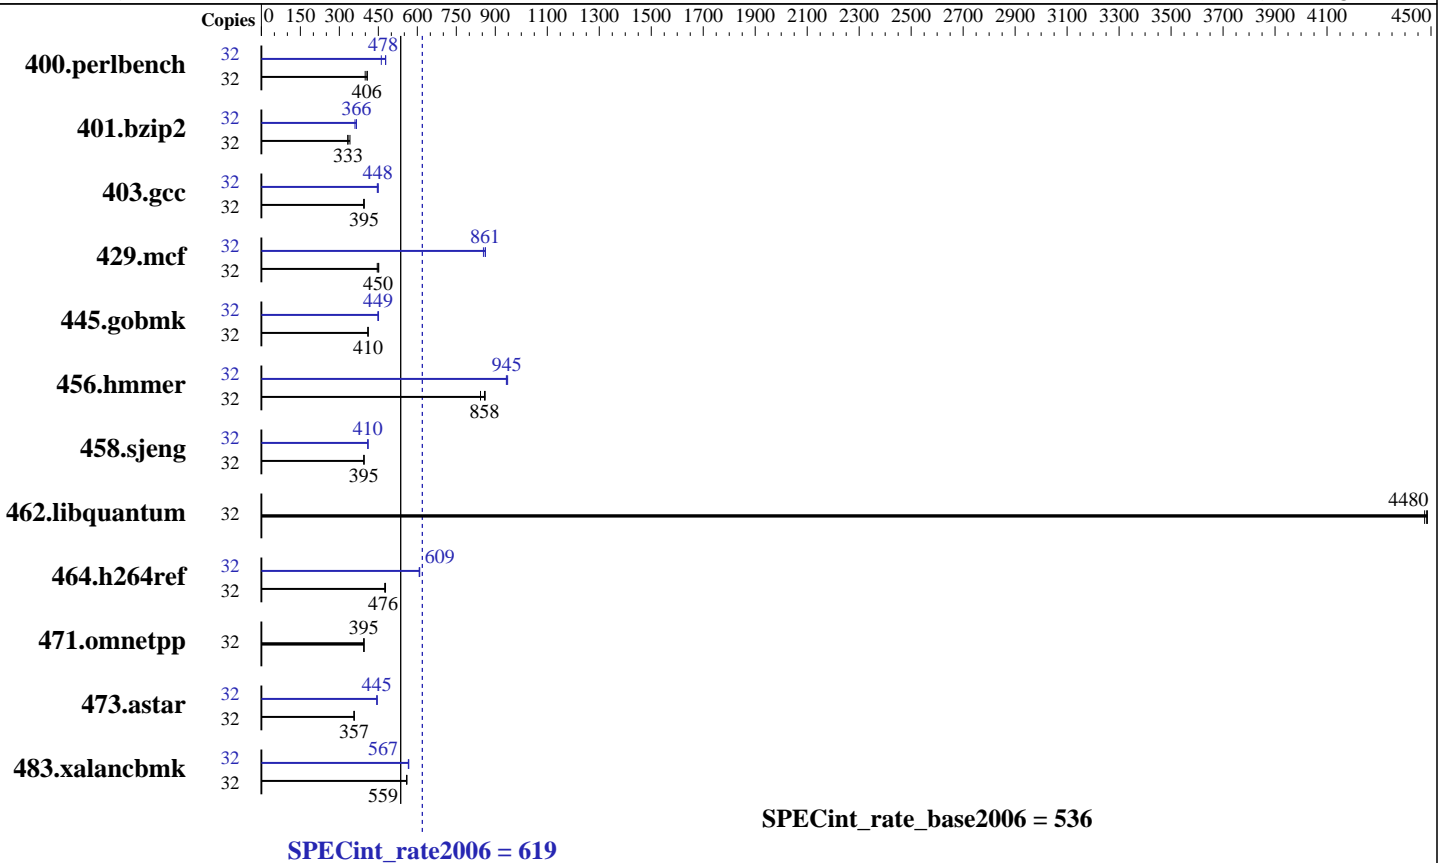

Hardware

CPU Name: AMD Opteron 6386 SE
 CPU Characteristics: AMD Turbo CORE technology up to 3.50 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 512 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.3,
Kernel 2.6.32-279.el6.x86_64
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite
(from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6386 SE

SPECint_rate2006 = 619

SPECint_rate_base2006 = 536

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	767	408	783	399	770	406	32	655	478	677	461	653	478
401.bzip2	32	929	332	926	333	906	341	32	858	360	844	366	845	366
403.gcc	32	652	395	652	395	654	394	32	578	446	573	450	575	448
429.mcf	32	655	446	649	450	646	452	32	339	862	342	854	339	861
445.gobmk	32	817	411	818	410	819	410	32	749	448	745	451	747	449
456.hammer	32	348	858	354	843	347	861	32	316	945	317	943	315	947
458.sjeng	32	981	395	981	395	981	395	32	945	410	945	410	944	410
462.libquantum	32	148	4480	148	4490	148	4480	32	148	4480	148	4490	148	4480
464.h264ref	32	1487	476	1483	478	1492	475	32	1166	607	1163	609	1163	609
471.omnetpp	32	508	394	507	395	507	395	32	508	394	507	395	507	395
473.astar	32	629	357	630	357	629	357	32	506	444	504	445	505	445
483.xalancbmk	32	395	559	395	559	395	560	32	391	565	390	567	390	567

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=28672 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1206-rate-libs-revA/32:/root/work/cpu2006v1.2/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6386 SE

SPECint_rate2006 = 619

SPECint_rate_base2006 = 536

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1

C++ benchmarks:
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6386 SE

SPECint_rate2006 = 619

SPECint_rate_base2006 = 536

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
 -WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
 -CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
 -GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
 -LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
 -OPT:goto=off -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
 -march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
 -m32 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
 -WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
 -CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
 -m32 -HP:bd=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -OPT:unroll_size=256 -OPT:unroll_times_max=8
 -OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
 -IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
 -HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -LNO:prefetch=2 -OPT:alias=disjoint
 -OPT:unroll_times_max=16 -OPT:unroll_size=512
 -OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
 -CG:cmp_peep=on -CG:pre_local_sched=off -HP:bd=2m:heap=2m
 -CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6386 SE

SPECint_rate2006 = 619

SPECint_rate_base2006 = 536

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

458.sjeng: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off
-CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: basepeak = yes

464.h264ref: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:unroll_size=256 -OPT:unroll_times_max=2
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bdt=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m
-march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2
-mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 13:00:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 November 2012.