



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®_rate2006 = 848

Huawei BH640 V2 (Intel Xeon E5-4620)

SPECint_rate_base2006 = 832

CPU2006 license: 3175


Test date: Dec-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Oct-2012

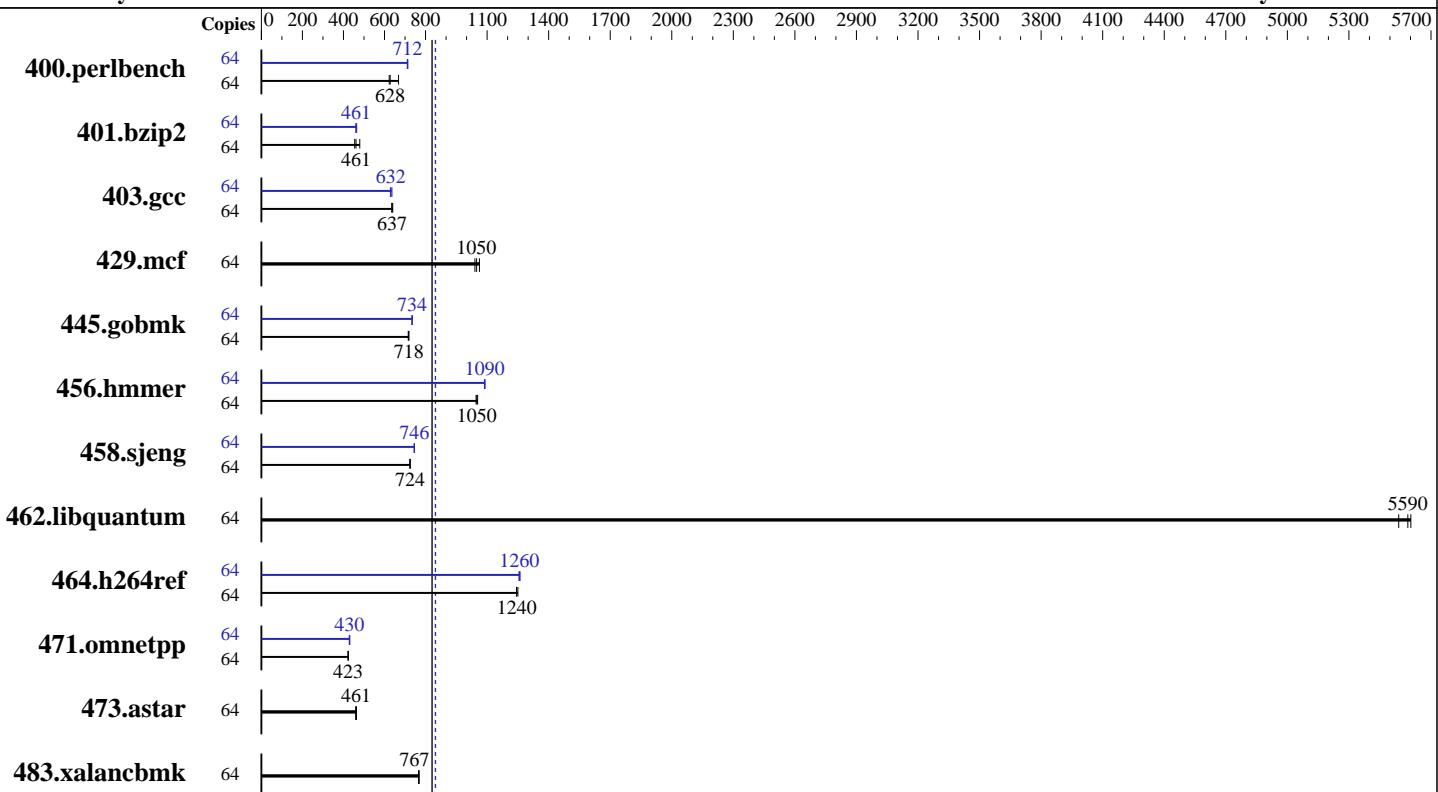

SPECint_rate_base2006 = 832

SPECint_rate2006 = 848

Hardware

CPU Name: Intel Xeon E5-4620
CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz
CPU MHz: 2200
FPU: Integrated
CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable: 2,4 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 16 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 300 GB SAS, 10K RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
Compiler: 2.6.32-220.el6.x86_64
C/C++: Version 13.0.0.079 of Intel C++ Studio XE for Linux
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 848

Huawei BH640 V2 (Intel Xeon E5-4620)

SPECint_rate_base2006 = 832

CPU2006 license: 3175

Test date: Dec-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Oct-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	935	668	1004	623	996	628	64	879	711	878	712	876	714
401.bzip2	64	1288	480	1339	461	1358	455	64	1339	461	1339	461	1330	464
403.gcc	64	809	637	805	640	811	635	64	810	636	819	629	816	632
429.mcf	64	549	1060	561	1040	556	1050	64	549	1060	561	1040	556	1050
445.gobmk	64	938	716	935	718	934	719	64	914	734	913	735	914	734
456.hammer	64	571	1050	567	1050	569	1050	64	549	1090	549	1090	548	1090
458.sjeng	64	1070	724	1069	724	1068	725	64	1038	746	1039	746	1040	744
462.libquantum	64	237	5600	239	5540	237	5590	64	237	5600	239	5540	237	5590
464.h264ref	64	1139	1240	1138	1240	1133	1250	64	1124	1260	1128	1260	1126	1260
471.omnetpp	64	944	424	946	423	946	423	64	929	431	930	430	934	428
473.astar	64	970	463	977	460	974	461	64	970	463	977	460	974	461
483.xalancbmk	64	577	766	574	769	576	767	64	577	766	574	769	576	767

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Select only test related files when installing the operating system

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on localhost.localdomain Sun May 9 07:59:40 2010

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 848

Huawei BH640 V2 (Intel Xeon E5-4620)

SPECint_rate_base2006 = 832

CPU2006 license: 3175

Test date: Dec-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Oct-2012

Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4620 0 @ 2.20GHz
        4 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 8
    siblings   : 16
    physical 0: cores 0 1 2 3 4 5 6 7
    physical 1: cores 0 1 2 3 4 5 6 7
    physical 2: cores 0 1 2 3 4 5 6 7
    physical 3: cores 0 1 2 3 4 5 6 7
cache size : 16384 KB
```

```
From /proc/meminfo
MemTotal:      132117380 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36
EDT 2012 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 9 06:55
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext3  272G  5.4G  252G  3%  /
```

```
Additional information from dmidecode:
```

```
(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory
using RHEL 6.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei BH640 V2 (Intel Xeon E5-4620)

SPECint_rate2006 = 848

CPU2006 license: 3175

Test date: Dec-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Oct-2012

Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 848

Huawei BH640 V2 (Intel Xeon E5-4620)

SPECint_rate_base2006 = 832

CPU2006 license: 3175

Test date: Dec-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Oct-2012

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei BH640 V2 (Intel Xeon E5-4620)

SPECint_rate2006 = 848

CPU2006 license: 3175

Test date: Dec-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Oct-2012

Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=__alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:38:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 April 2013.