



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C420 M3 (Intel Xeon E5-4607, 2.20 GHz)

**SPECint\_rate2006 = 705**

**SPECint\_rate\_base2006 = 679**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Feb-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Feb-2012

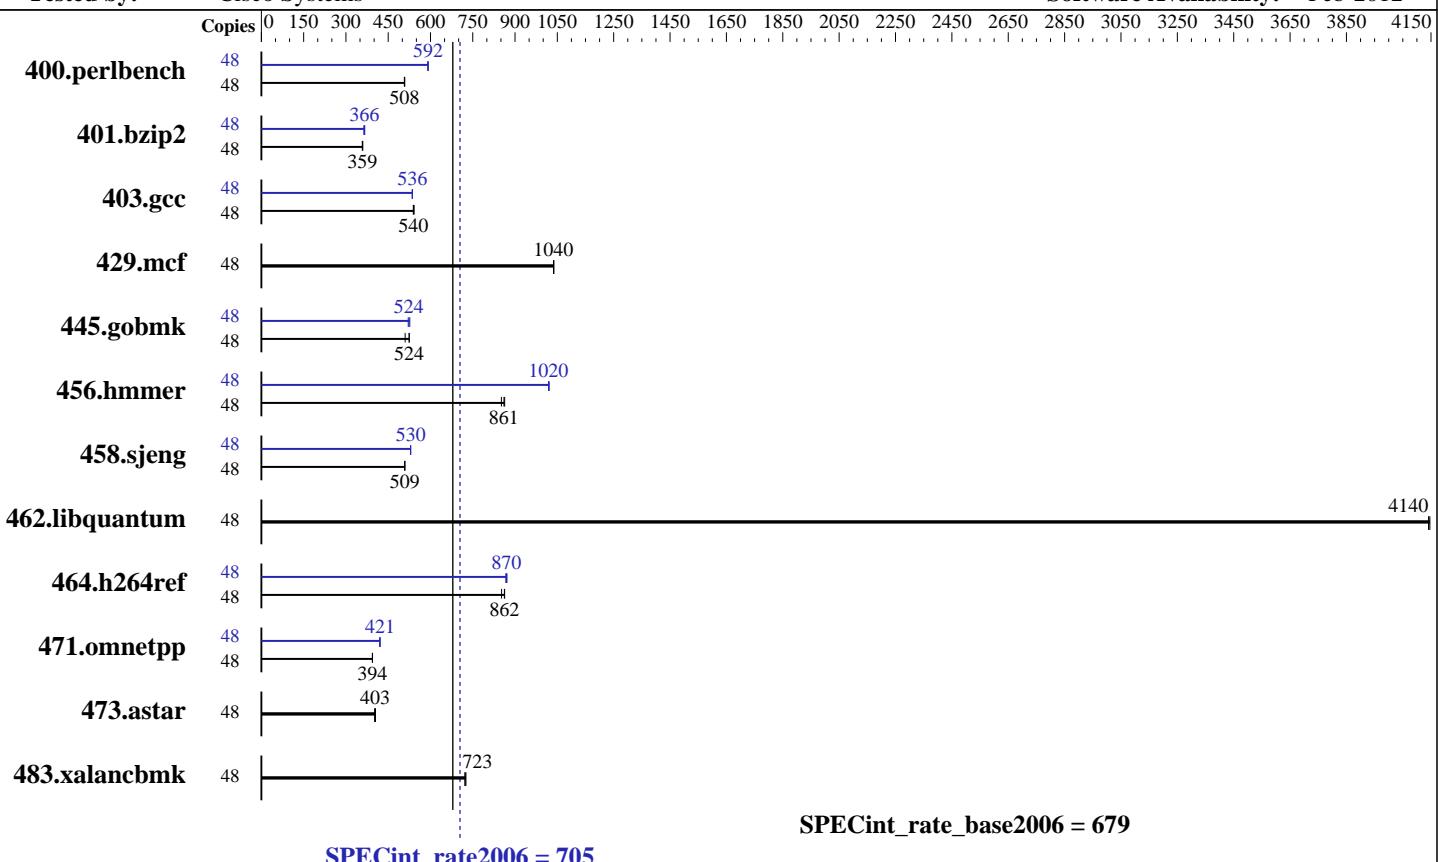

**SPECint\_rate\_base2006 = 679**

**SPECint\_rate2006 = 705**

### Hardware

|                      |   |
|----------------------|---|
| CPU Name:            | Intel Xeon E5-4607  |
| CPU Characteristics: |   |
| CPU MHz:             | 2200  |
| FPU:                 | Integrated  |
| CPU(s) enabled:      | 24 cores, 4 chips, 6 cores/chip, 2 threads/core                         |
| CPU(s) orderable:    | 1,2,3,4 chip  |
| Primary Cache:       | 32 KB I + 32 KB D on chip per core                                      |
| Secondary Cache:     | 256 KB I+D on chip per core   |
| L3 Cache:            | 12 MB I+D on chip per chip  |
| Other Cache:         | None  |
| Memory:              | 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz and CL7) |
| Disk Subsystem:      | 1 X 600 GB 10000 RPM SAS  |
| Other Hardware:      | None  |

### Software

|                   |   |
|-------------------|---|
| Operating System: | Red Hat Enterprise Linux Server release 6.2 (Santiago)<br>2.6.32-220.el6.x86_64 |
| Compiler:         | C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux                      |
| Auto Parallel:    | No  |
| File System:      | ext4  |
| System State:     | Run level 3 (multi-user)  |
| Base Pointers:    | 32-bit  |
| Peak Pointers:    | 32/64-bit   |
| Other Software:   | Microquill SmartHeap V9.01  |



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C420 M3 (Intel Xeon E5-4607, 2.20 GHz)

**SPECint\_rate2006 = 705**

**SPECint\_rate\_base2006 = 679**

**CPU2006 license:** 9019

**Test date:** Feb-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Nov-2012

**Tested by:** Cisco Systems

**Software Availability:** Feb-2012

## Results Table

| Benchmark      | Base   |             |            |             |             |             |             | Peak   |            |             |             |             |            |             |
|----------------|--------|-------------|------------|-------------|-------------|-------------|-------------|--------|------------|-------------|-------------|-------------|------------|-------------|
|                | Copies | Seconds     | Ratio      | Seconds     | Ratio       | Seconds     | Ratio       | Copies | Seconds    | Ratio       | Seconds     | Ratio       | Seconds    | Ratio       |
| 400.perlbench  | 48     | 924         | 507        | 922         | 508         | <b>923</b>  | <b>508</b>  | 48     | 793        | 592         | 794         | 590         | <b>793</b> | <b>592</b>  |
| 401.bzip2      | 48     | 1289        | 359        | <b>1289</b> | <b>359</b>  | 1294        | 358         | 48     | 1263       | 367         | <b>1267</b> | <b>366</b>  | 1275       | 363         |
| 403.gcc        | 48     | <b>716</b>  | <b>540</b> | 713         | 542         | 717         | 539         | 48     | 721        | 536         | <b>721</b>  | <b>536</b>  | 722        | 535         |
| 429.mcf        | 48     | 422         | 1040       | <b>422</b>  | <b>1040</b> | 422         | 1040        | 48     | 422        | 1040        | <b>422</b>  | <b>1040</b> | 422        | 1040        |
| 445.gobmk      | 48     | <b>960</b>  | <b>524</b> | 987         | 510         | 960         | 525         | 48     | 956        | 527         | 966         | 521         | <b>962</b> | <b>524</b>  |
| 456.hammer     | 48     | 519         | 863        | <b>520</b>  | <b>861</b>  | 526         | 852         | 48     | <b>439</b> | <b>1020</b> | 439         | 1020        | 439        | 1020        |
| 458.sjeng      | 48     | <b>1142</b> | <b>509</b> | 1142        | 509         | 1142        | 509         | 48     | 1096       | 530         | <b>1096</b> | <b>530</b>  | 1098       | 529         |
| 462.libquantum | 48     | 240         | 4140       | 240         | 4150        | <b>240</b>  | <b>4140</b> | 48     | 240        | 4140        | 240         | 4150        | <b>240</b> | <b>4140</b> |
| 464.h264ref    | 48     | 1231        | 863        | 1246        | 852         | <b>1232</b> | <b>862</b>  | 48     | 1225       | 867         | <b>1221</b> | <b>870</b>  | 1219       | 871         |
| 471.omnetpp    | 48     | 762         | 394        | <b>761</b>  | <b>394</b>  | 761         | 394         | 48     | 712        | 421         | <b>713</b>  | <b>421</b>  | 715        | 420         |
| 473.astar      | 48     | 838         | 402        | <b>836</b>  | <b>403</b>  | 832         | 405         | 48     | 838        | 402         | <b>836</b>  | <b>403</b>  | 832        | 405         |
| 483.xalancbmk  | 48     | <b>458</b>  | <b>723</b> | 459         | 722         | 456         | 726         | 48     | <b>458</b> | <b>723</b>  | 459         | 722         | 456        | 726         |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:

Processor Power State C6 set to Disabled

Processor Power State C1 Enhanced set to Disabled

Power Technology set to Custom

Energy Performance set to Performance

DRAM Clock Throttling set to Performance

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on localhost.localdomain Fri Feb 22 22:03:09 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-4607 0 @ 2.20GHz  
4 "physical id"s (chips)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C420 M3 (Intel Xeon E5-4607, 2.20 GHz)

**SPECint\_rate2006 = 705**

**SPECint\_rate\_base2006 = 679**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Feb-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Feb-2012

## Platform Notes (Continued)

```
48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
siblings : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
physical 2: cores 0 1 2 3 4 5
physical 3: cores 0 1 2 3 4 5
cache size : 12288 KB

From /proc/meminfo
MemTotal:      529253824 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 22 21:52

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4   458G   10G   425G   3%  /


Additional information from dmidecode:
Memory:
32x 0xCE00 M393B2G70BH0-YK0 16 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/lib32:/opt/cpu2006-1.2/lib64"

Intel HT Technology=enable

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2  
Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C420 M3 (Intel Xeon E5-4607, 2.20 GHz)

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

**SPECint\_rate2006 = 705**

**SPECint\_rate\_base2006 = 679**

Test date: Feb-2012

Hardware Availability: Nov-2012

Software Availability: Feb-2012

## Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C420 M3 (Intel Xeon E5-4607, 2.20 GHz)

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**SPECint\_rate2006 = 705**

**SPECint\_rate\_base2006 = 679**

**Test date:** Feb-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Feb-2012

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
  
429.mcf: basepeak = yes  
  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32  
  
462.libquantum: basepeak = yes  
  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C420 M3 (Intel Xeon E5-4607, 2.20 GHz)

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**SPECint\_rate2006 = 705**

**SPECint\_rate\_base2006 = 679**

**Test date:** Feb-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:28:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 April 2013.