



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp®\_rate2006 = 575**

Huawei RH2485 V2 (Intel Xeon E5-4607)

**SPECfp\_rate\_base2006 = 567**

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: May-2013

Hardware Availability: May-2012

Software Availability: Feb-2013

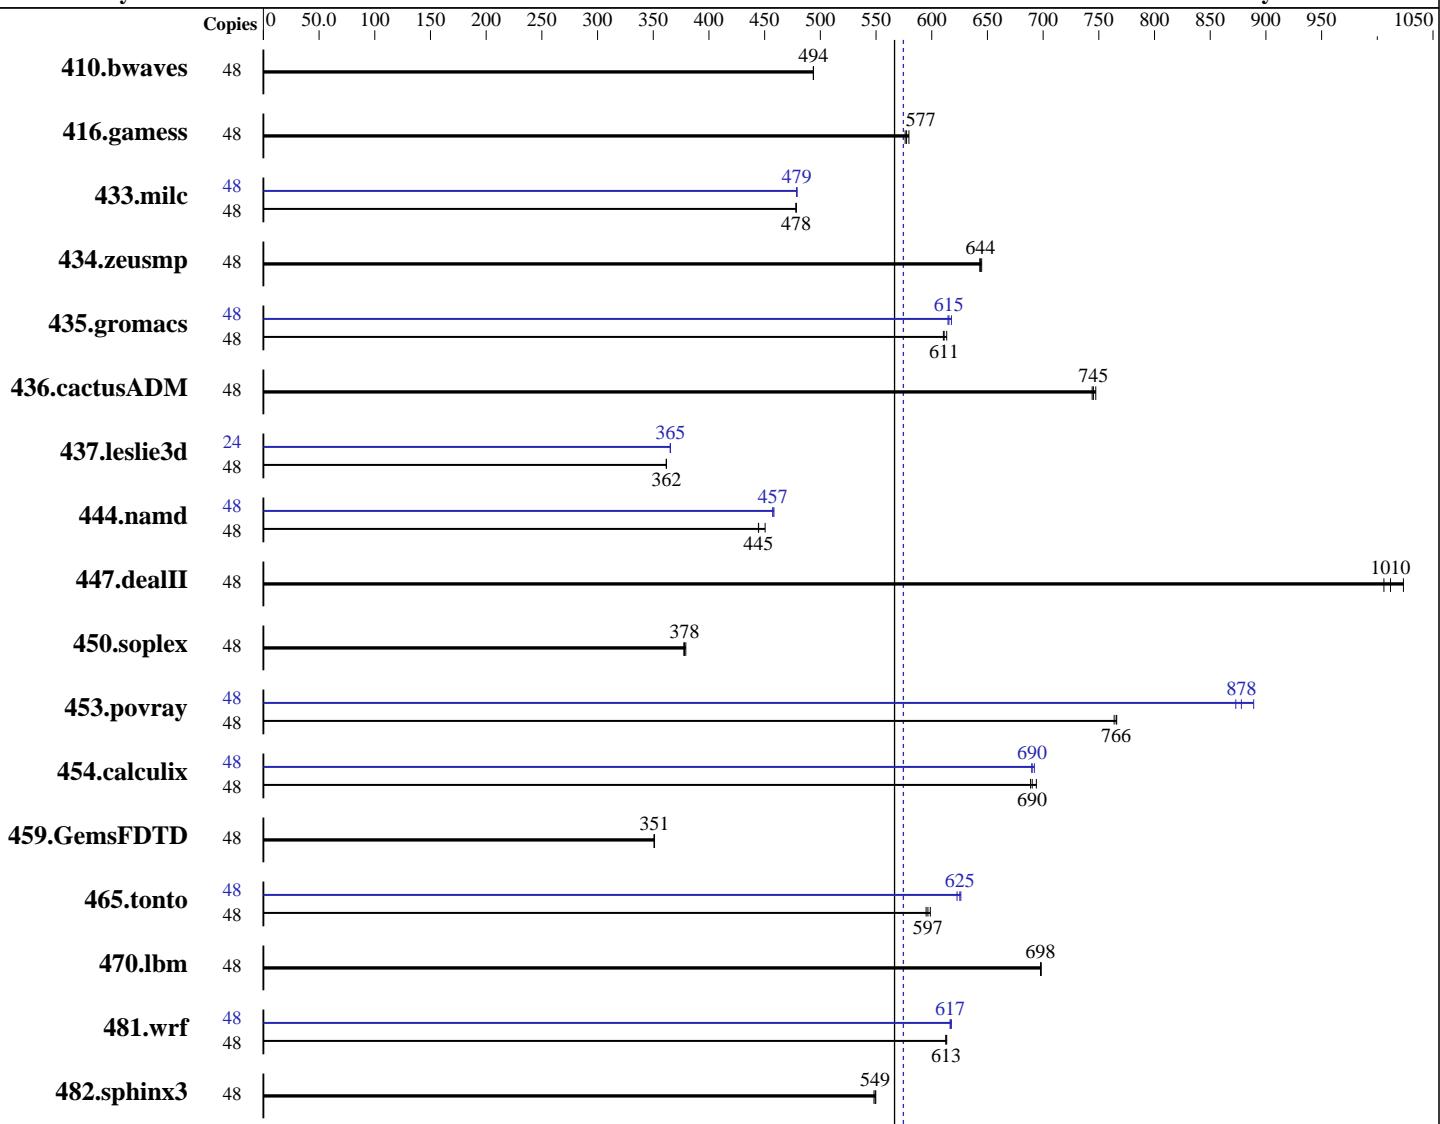

**SPECfp\_rate\_base2006 = 567**

**SPECfp\_rate2006 = 575**

## Hardware

CPU Name: Intel Xeon E5-4607  
 CPU Characteristics:  
 CPU MHz:  
 FPU:  
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Compiler: 2.6.32-358.el6.x86\_64  
 C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 575**

Huawei RH2485 V2 (Intel Xeon E5-4607)

**SPECfp\_rate\_base2006 = 567**

CPU2006 license: 3175

Test date: May-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Feb-2013

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC running at 1066 MHz and CL7)  
 Disk Subsystem: 1 x 300 GB SAS 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1321	494	1321	494	<b>1321</b>	<b>494</b>	48	1321	494	1321	494	<b>1321</b>	<b>494</b>		
416.gamess	48	1622	580	<b>1628</b>	<b>577</b>	1631	576	48	1622	580	<b>1628</b>	<b>577</b>	1631	576		
433.milc	48	922	478	<b>921</b>	<b>478</b>	921	478	48	<b>920</b>	<b>479</b>	920	479	920	479		
434.zeusmp	48	679	643	<b>679</b>	<b>644</b>	677	645	48	679	643	<b>679</b>	<b>644</b>	677	645		
435.gromacs	48	<b>561</b>	<b>611</b>	559	613	561	610	48	<b>557</b>	<b>615</b>	558	615	555	618		
436.cactusADM	48	768	747	<b>770</b>	<b>745</b>	771	744	48	768	747	<b>770</b>	<b>745</b>	771	744		
437.leslie3d	48	1247	362	<b>1247</b>	<b>362</b>	1247	362	24	617	365	618	365	<b>617</b>	<b>365</b>		
444.namd	48	866	444	855	450	<b>866</b>	<b>445</b>	48	842	457	<b>842</b>	<b>457</b>	840	458		
447.dealII	48	537	1020	<b>543</b>	<b>1010</b>	546	1010	48	537	1020	<b>543</b>	<b>1010</b>	546	1010		
450.soplex	48	1056	379	<b>1059</b>	<b>378</b>	1061	377	48	1056	379	<b>1059</b>	<b>378</b>	1061	377		
453.povray	48	334	764	<b>334</b>	<b>766</b>	333	766	48	<b>291</b>	<b>878</b>	293	873	287	889		
454.calculix	48	<b>574</b>	<b>690</b>	575	689	571	694	48	574	690	572	692	<b>574</b>	<b>690</b>		
459.GemsFDTD	48	<b>1450</b>	<b>351</b>	1450	351	1452	351	48	<b>1450</b>	<b>351</b>	1450	351	1452	351		
465.tonto	48	<b>792</b>	<b>597</b>	794	595	789	599	48	758	623	<b>755</b>	<b>625</b>	754	626		
470.lbm	48	945	698	<b>945</b>	<b>698</b>	944	698	48	945	698	<b>945</b>	<b>698</b>	944	698		
481.wrf	48	<b>875</b>	<b>613</b>	874	613	875	613	48	868	618	870	617	<b>869</b>	<b>617</b>		
482.sphinx3	48	1707	548	<b>1703</b>	<b>549</b>	1702	550	48	1707	548	<b>1703</b>	<b>549</b>	1702	550		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

Select only test related files when installing the operating system



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 575**

Huawei RH2485 V2 (Intel Xeon E5-4607)

**SPECfp\_rate\_base2006 = 567**

**CPU2006 license:** 3175

**Test date:** May-2013

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Feb-2013

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance  
Baseboard Management Controller used to adjust the fan speed to 100%  
Sysinfo program /spec/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Wed May 29 20:14:29 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-4607 0 @ 2.20GHz  
 4 "physical id"s (chips)  
 48 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 6  
 siblings : 12  
 physical 0: cores 0 1 2 3 4 5  
 physical 1: cores 0 1 2 3 4 5  
 physical 2: cores 0 1 2 3 4 5  
 physical 3: cores 0 1 2 3 4 5  
cache size : 12288 KB

From /proc/meminfo  
MemTotal: 264557600 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/\*release\* /etc/\*version\*  
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:  
Linux localhost.localdomain 2.6.32-358.el6.x86\_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 May 29 19:26

SPEC is set to: /spec  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sdal ext4 241G 8.7G 220G 4% /

Additional information from dmidecode:

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2485 V2 (Intel Xeon E5-4607)

**SPECfp\_rate2006 = 575**

CPU2006 license: 3175

Test date: May-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Feb-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64"

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory  
using RHEL 6.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2485 V2 (Intel Xeon E5-4607)

**SPECfp\_rate2006 = 575**

CPU2006 license: 3175

Test date: May-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Feb-2013

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-opt-mem-layout-trans=3
```

```
470.lbm: basepeak = yes
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2485 V2 (Intel Xeon E5-4607)

**SPECfp\_rate2006 = 575**

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** May-2013

**Hardware Availability:** May-2012

**Software Availability:** Feb-2013

## Peak Optimization Flags (Continued)

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-opt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div  
-prof-use(pass 2) -xSSE4.2 -opt-prefetch -static  
-auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 575**

Huawei RH2485 V2 (Intel Xeon E5-4607)

**SPECfp\_rate\_base2006 = 567**

**CPU2006 license:** 3175

**Test date:** May-2013

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Feb-2013

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:55:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 June 2013.