



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2695 v2, 2.40 GHz)

SPECfp®_rate2006 = 675

SPECfp_rate_base2006 = 659

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

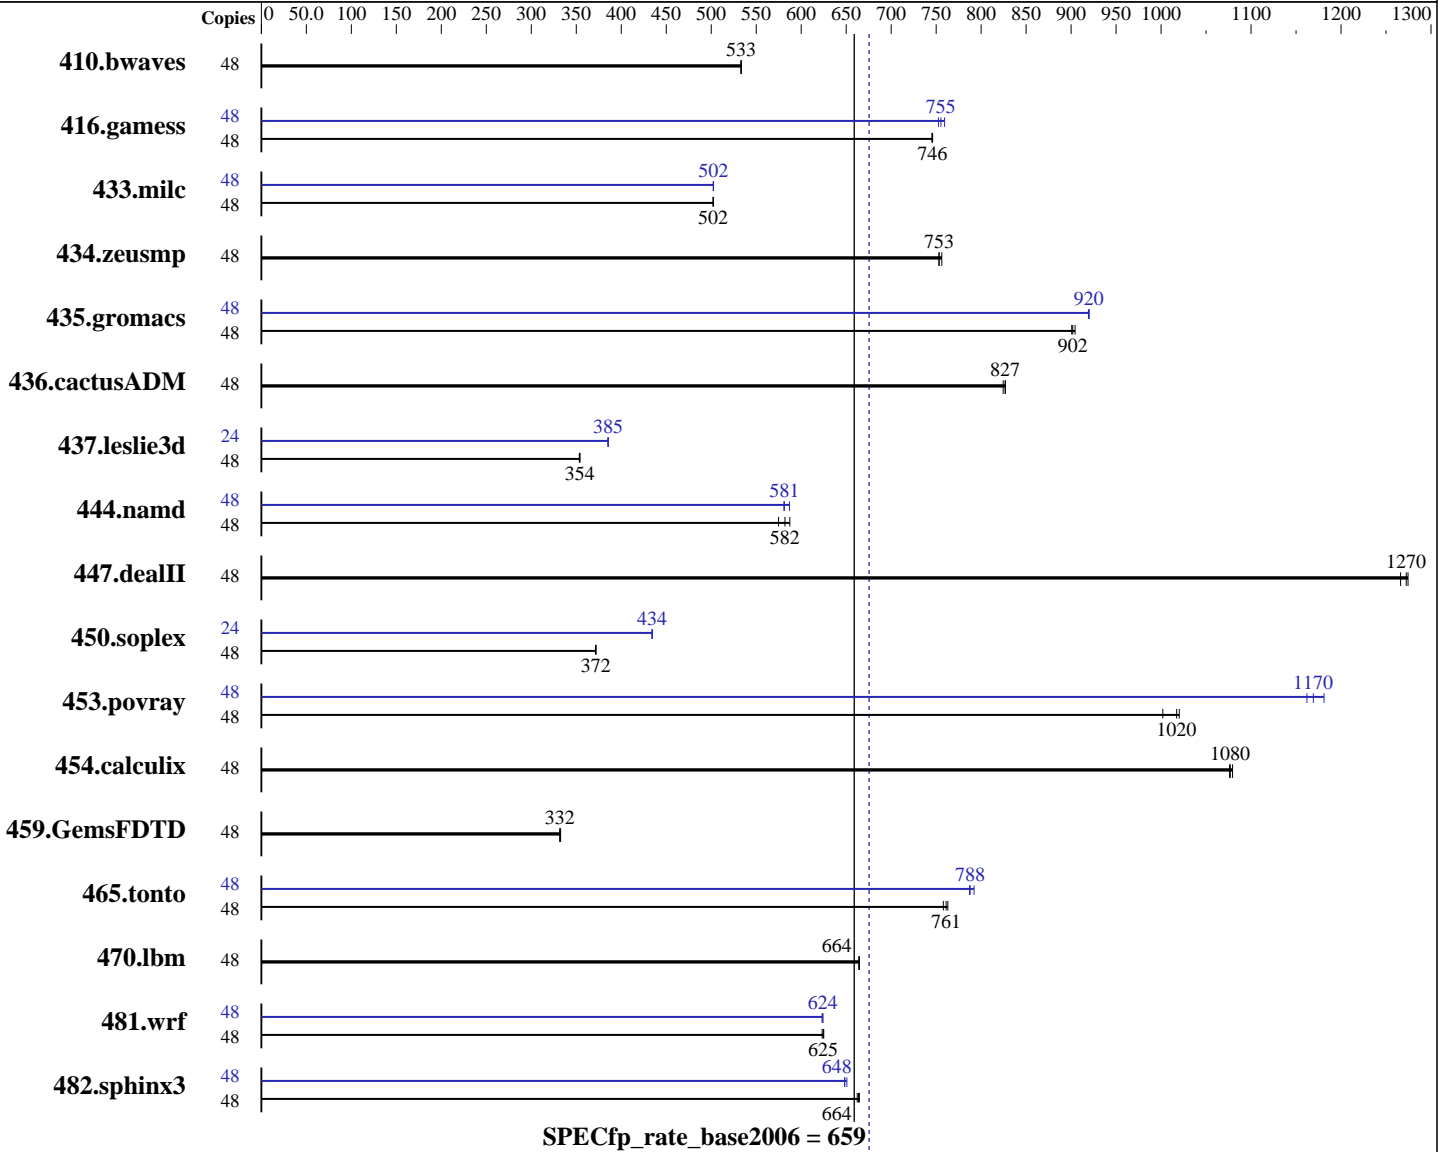

Hardware

CPU Name: Intel Xeon E5-2695 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2695 v2, 2.40 GHz)

SPECfp_rate2006 = **675**

SPECfp_rate_base2006 = **659**

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 x 300 GB 15000 RPM SAS
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Node

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1223	533	<u>1223</u>	<u>533</u>	1224	533	48	1223	533	<u>1223</u>	<u>533</u>	1224	533
416.gamess	48	1261	745	<u>1260</u>	<u>746</u>	1260	746	48	1238	759	<u>1244</u>	<u>755</u>	1249	753
433.milc	48	878	502	<u>877</u>	<u>502</u>	877	502	48	877	503	877	502	<u>877</u>	<u>502</u>
434.zeusmp	48	580	753	<u>580</u>	<u>753</u>	578	756	48	580	753	<u>580</u>	<u>753</u>	578	756
435.gromacs	48	379	904	381	901	<u>380</u>	<u>902</u>	48	<u>373</u>	<u>920</u>	373	919	373	920
436.cactusADM	48	<u>694</u>	<u>827</u>	694	827	696	824	48	<u>694</u>	<u>827</u>	694	827	696	824
437.leslie3d	48	1277	353	1274	354	<u>1275</u>	<u>354</u>	24	<u>585</u>	<u>385</u>	586	385	585	386
444.namd	48	670	575	655	587	<u>662</u>	<u>582</u>	48	663	581	656	587	<u>662</u>	<u>581</u>
447.dealII	48	434	1270	431	1270	<u>432</u>	<u>1270</u>	48	434	1270	431	1270	<u>432</u>	<u>1270</u>
450.soplex	48	1076	372	<u>1077</u>	<u>372</u>	1078	371	24	461	435	461	434	<u>461</u>	<u>434</u>
453.povray	48	250	1020	<u>251</u>	<u>1020</u>	255	1000	48	220	1160	<u>218</u>	<u>1170</u>	216	1180
454.calculix	48	<u>368</u>	<u>1080</u>	367	1080	368	1080	48	<u>368</u>	<u>1080</u>	367	1080	368	1080
459.GemsFDTD	48	1535	332	1531	333	<u>1535</u>	<u>332</u>	48	1535	332	1531	333	<u>1535</u>	<u>332</u>
465.tonto	48	623	758	619	763	<u>621</u>	<u>761</u>	48	596	792	600	787	<u>600</u>	<u>788</u>
470.lbm	48	<u>993</u>	<u>664</u>	992	665	993	664	48	<u>993</u>	<u>664</u>	992	665	993	664
481.wrf	48	860	623	<u>858</u>	<u>625</u>	858	625	48	860	623	859	624	<u>859</u>	<u>624</u>
482.sphinx3	48	<u>1410</u>	<u>664</u>	1413	662	1407	665	48	1443	648	1438	651	<u>1443</u>	<u>648</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Intel HT Technology = Enabled
CPU performance set to HPC
Power Technology set to Custom

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2695 v2, 2.40 GHz)

SPECfp_rate2006 = 675

SPECfp_rate_base2006 = 659

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Platform Notes (Continued)

```

CPU Power State C6 set to Enabled
CPU Power State C1 Enhanced set to Disabled
Energy Performance policy set to Performance
Memory RAS configuration set to Maximum Performance
DRAM Clock Throttling Set to Performance
LV DDR Mode set to Performance-mode
DRAM Refresh Rate Set to 1x
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on C240M3-ivb Thu Nov 21 17:33:13 2013

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2695 v2 @ 2.40GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 12
  siblings  : 24
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB

```

```

From /proc/meminfo
MemTotal:      132122116 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux C240M3-ivb 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Nov 21 17:32

```

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal        ext4      275G  13G  248G   5% /

```

Additional information from dmidecode:
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2695 v2, 2.40 GHz)

SPECfp_rate2006 = 675

SPECfp_rate_base2006 = 659

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Nov-2013
Hardware Availability: Sep-2013
Software Availability: Sep-2013

Platform Notes (Continued)

BIOS Cisco Systems, Inc. C240M3.1.5.3b.0.082020130616 08/20/2013

Memory:

16x 0xAD00 HMT31GR7EFR4C-RD 8 GB 1866 MHz 2 rank
8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2695 v2, 2.40 GHz)

SPECfp_rate2006 = 675

SPECfp_rate_base2006 = 659

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Base Portability Flags (Continued)

```

450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
482.sphinx3: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2695 v2, 2.40 GHz)

SPECfp_rate2006 = 675

SPECfp_rate_base2006 = 659

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -auto-ilp32

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

```

447.dealII: basepeak = yes

```

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2695 v2, 2.40 GHz)

SPECfp_rate2006 = 675

SPECfp_rate_base2006 = 659

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 19:43:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 December 2013.