



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation


IBM System x3500 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

SPECint®\_rate2006 = 743

SPECint\_rate\_base2006 = 717

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Feb-2014  
Hardware Availability: Dec-2013  
Software Availability: Sep-2013

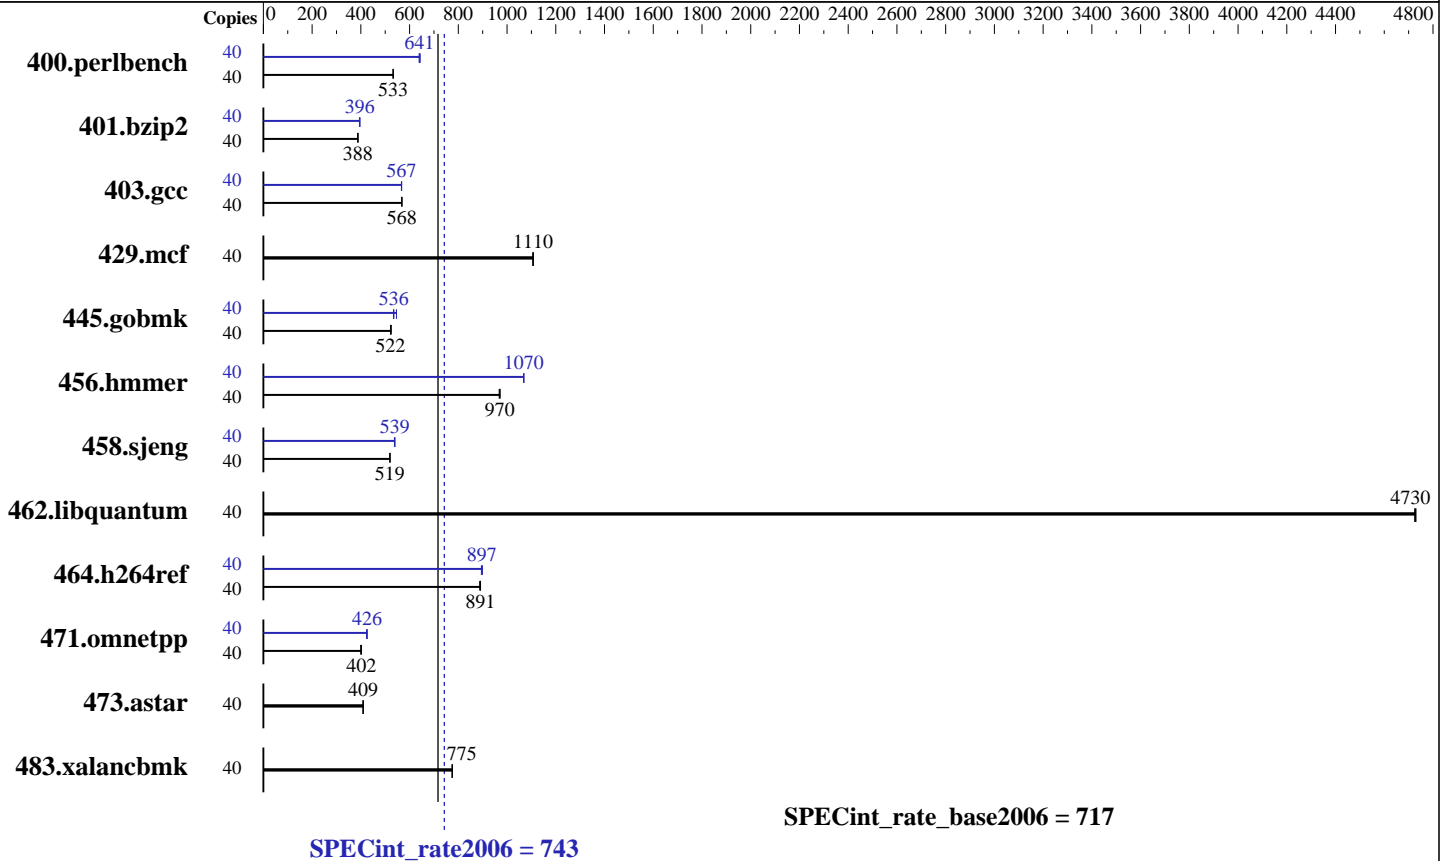

### Hardware

CPU Name: Intel Xeon E5-2660 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3500 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

SPECint\_rate2006 = 743

SPECint\_rate\_base2006 = 717

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Feb-2014  
Hardware Availability: Dec-2013  
Software Availability: Sep-2013

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	40	733	533	<u>733</u>	<u>533</u>	734	532	40	607	643	<u>610</u>	<u>641</u>	611	639		
401.bzip2	40	993	389	997	387	<u>996</u>	<u>388</u>	40	979	394	<u>976</u>	<u>396</u>	974	396		
403.gcc	40	<u>567</u>	<u>568</u>	566	568	567	568	40	567	568	568	566	<u>568</u>	<u>567</u>		
429.mcf	40	329	1110	330	1110	<u>330</u>	<u>1110</u>	40	329	1110	330	1110	<u>330</u>	<u>1110</u>		
445.gobmk	40	799	525	804	522	<u>804</u>	<u>522</u>	40	<u>783</u>	<u>536</u>	768	546	786	534		
456.hammer	40	386	968	<u>385</u>	<u>970</u>	384	971	40	<u>349</u>	<u>1070</u>	349	1070	350	1070		
458.sjeng	40	931	520	<u>932</u>	<u>519</u>	933	519	40	900	538	<u>898</u>	<u>539</u>	896	540		
462.libquantum	40	<u>175</u>	<u>4730</u>	175	4730	175	4720	40	<u>175</u>	<u>4730</u>	175	4730	175	4720		
464.h264ref	40	997	888	<u>993</u>	<u>891</u>	993	891	40	985	899	989	895	<u>987</u>	<u>897</u>		
471.omnetpp	40	627	399	621	403	<u>621</u>	<u>402</u>	40	<u>587</u>	<u>426</u>	591	423	587	426		
473.astar	40	687	409	685	410	<u>686</u>	<u>409</u>	40	687	409	685	410	<u>686</u>	<u>409</u>		
483.xalancbmk	40	<u>356</u>	<u>775</u>	356	775	356	775	40	<u>356</u>	<u>775</u>	356	775	356	775		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode

## Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance  
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on x3500M4 Wed Feb 19 14:39:24 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2660 v2 @ 2.20GHz  
2 "physical id"s (chips)  
40 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 743**

IBM System x3500 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECint\_rate\_base2006 = 717**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Feb-2014  
**Hardware Availability:** Dec-2013  
**Software Availability:** Sep-2013

## Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 10
siblings  : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      264653416 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3500M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 19 14:32
```

```
SPEC is set to: /home/SPECcpu-new
Filesystem      Type      Size Used Avail Use% Mounted on
/dev/mapper/vg_intelcrb-lv_home
                ext4      863G  15G  804G   2% /home
```

```
Additional information from dmidecode:
BIOS IBM  -[TKE133FUS-1.50]- 07/26/2013
Memory:
 8x Not Specified Not Specified
16x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank
```

(End of data from sysinfo program)  
"Not Specified" memory information from dmidecode indicates unused DIMM slots.

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 743**

IBM System x3500 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECint\_rate\_base2006 = 717**

**CPU2006 license:** 11

**Test date:** Feb-2014

**Test sponsor:** IBM Corporation

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

## General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3500 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECint\_rate2006 = 743**

**SPECint\_rate\_base2006 = 717**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Feb-2014  
**Hardware Availability:** Dec-2013  
**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:  
`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`  
401.bzip2: `-DSPEC_CPU_LP64`  
456.hmmer: `-DSPEC_CPU_LP64`  
458.sjeng: `-DSPEC_CPU_LP64`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll2 -ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3500 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECint\_rate2006 = 743**

**SPECint\_rate\_base2006 = 717**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Feb-2014  
**Hardware Availability:** Dec-2013  
**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 20:46:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 25 March 2014.