



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECfp®\_rate2006 = 552

I620-G15 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECfp\_rate\_base2006 = 543

CPU2006 license: 9046


Test sponsor: Sugon

Tested by: Sugon

Test date: Jan-2014

Hardware Availability: Dec-2013

Software Availability: Jan-2014

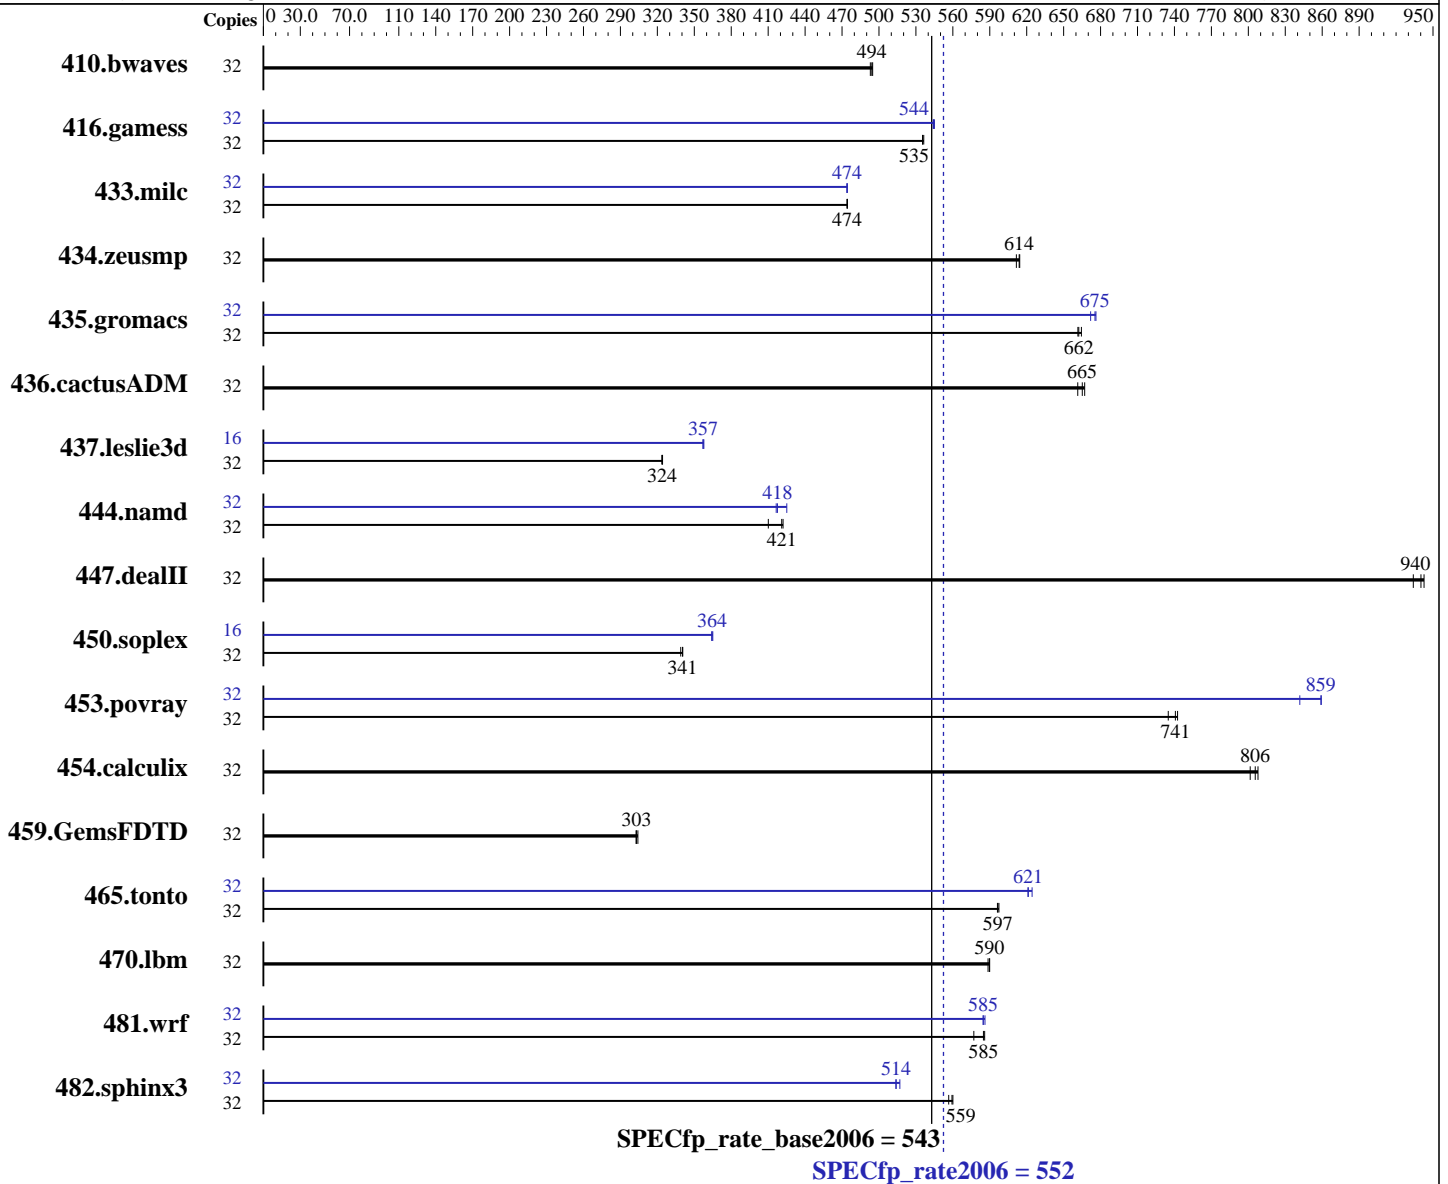

### Hardware

CPU Name: Intel Xeon E5-2650 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECfp\_rate2006 = **552**

I620-G15 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECfp\_rate\_base2006 = **543**

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Jan-2014

Hardware Availability: Dec-2013

Software Availability: Jan-2014

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 X 2 TB SATA 7200 RPM, RAID 0  
 Other Hardware: None

System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	879	495	<b>880</b>	<b>494</b>	882	493	32	879	495	<b>880</b>	<b>494</b>	882	493
416.gamess	32	1170	535	1168	536	<b>1170</b>	<b>535</b>	32	1152	544	1150	545	<b>1151</b>	<b>544</b>
433.milc	32	619	474	620	474	<b>619</b>	<b>474</b>	32	<b>620</b>	<b>474</b>	620	474	619	474
434.zeusmp	32	474	614	<b>474</b>	<b>614</b>	476	612	32	474	614	<b>474</b>	<b>614</b>	476	612
435.gromacs	32	344	664	<b>345</b>	<b>662</b>	345	662	32	340	672	<b>338</b>	<b>675</b>	338	676
436.cactusADM	32	573	667	578	661	<b>575</b>	<b>665</b>	32	573	667	578	661	<b>575</b>	<b>665</b>
437.leslie3d	32	929	324	928	324	<b>928</b>	<b>324</b>	16	421	357	<b>421</b>	<b>357</b>	420	358
444.namd	32	<b>610</b>	<b>421</b>	608	422	626	410	32	616	417	604	425	<b>615</b>	<b>418</b>
447.dealII	32	<b>389</b>	<b>940</b>	388	943	392	934	32	<b>389</b>	<b>940</b>	388	943	392	934
450.soplex	32	784	341	787	339	<b>784</b>	<b>341</b>	16	366	365	366	364	<b>366</b>	<b>364</b>
453.povray	32	229	743	<b>230</b>	<b>741</b>	232	735	32	<b>198</b>	<b>859</b>	202	842	198	859
454.calculix	32	329	802	<b>328</b>	<b>806</b>	327	808	32	329	802	<b>328</b>	<b>806</b>	327	808
459.GemsFDTD	32	1116	304	<b>1120</b>	<b>303</b>	1122	303	32	1116	304	<b>1120</b>	<b>303</b>	1122	303
465.tonto	32	528	596	527	597	<b>528</b>	<b>597</b>	32	507	621	<b>507</b>	<b>621</b>	504	624
470.lbm	32	745	590	747	589	<b>746</b>	<b>590</b>	32	745	590	747	589	<b>746</b>	<b>590</b>
481.wrf	32	<b>611</b>	<b>585</b>	619	577	610	586	32	611	585	610	586	<b>611</b>	<b>585</b>
482.sphinx3	32	1120	557	1114	560	<b>1115</b>	<b>559</b>	32	1206	517	<b>1213</b>	<b>514</b>	1214	514

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
Intel Virtualization technology set to disabled  
Power Technology set to performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECfp\_rate2006 = 552

I620-G15 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECfp\_rate\_base2006 = 543

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Jan-2014  
Hardware Availability: Dec-2013  
Software Availability: Jan-2014

### Platform Notes (Continued)

Turbo boost set to enabled  
DDR Speed set to force 1866  
Sysinfo program /home/cpu2006/config/sysinfo.rev6874  
\$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ 654bd3fcf53b06faef0efe54ed011998  
running on cpu2006 Sun Jan 19 03:55:27 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 v2 @ 2.60GHz
 2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264502580 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux cpu2006 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 18 00:08
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_cpu2006-lv_home
  ext4          1.8T  107G  1.6T   7% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 552

I620-G15 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECfp\_rate\_base2006 = 543

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Jan-2014  
Hardware Availability: Dec-2013  
Software Availability: Jan-2014

## Platform Notes (Continued)

BIOS American Megatrends Inc. V8.100A 10/31/2013  
Memory:  
16x Hynix Semiconductor HMT42GR7AFR4C-RD 16 GB 1 rank 1866 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 552

I620-G15 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECfp\_rate\_base2006 = 543

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Jan-2014

Hardware Availability: Dec-2013

Software Availability: Jan-2014

## Base Portability Flags (Continued)

450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 552

I620-G15 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECfp\_rate\_base2006 = 543

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Jan-2014  
Hardware Availability: Dec-2013  
Software Availability: Jan-2014

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -auto-ilp32

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

```

447.dealII: basepeak = yes

```

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

**SPECfp\_rate2006 = 552**

I620-G15 (Intel Xeon E5-2650 v2, 2.60 GHz)

**SPECfp\_rate\_base2006 = 543**

**CPU2006 license:** 9046

**Test sponsor:** Sugon

**Tested by:** Sugon

**Test date:** Jan-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Jan-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 23:12:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 April 2014.