



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-6028R-TDWNR
(X10DDW-iN , Intel Xeon E5-2695 v3)

SPECint®_rate2006 = 1130

SPECint_rate_base2006 = 1090

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2014

Hardware Availability: Nov-2014

Software Availability: Sep-2014

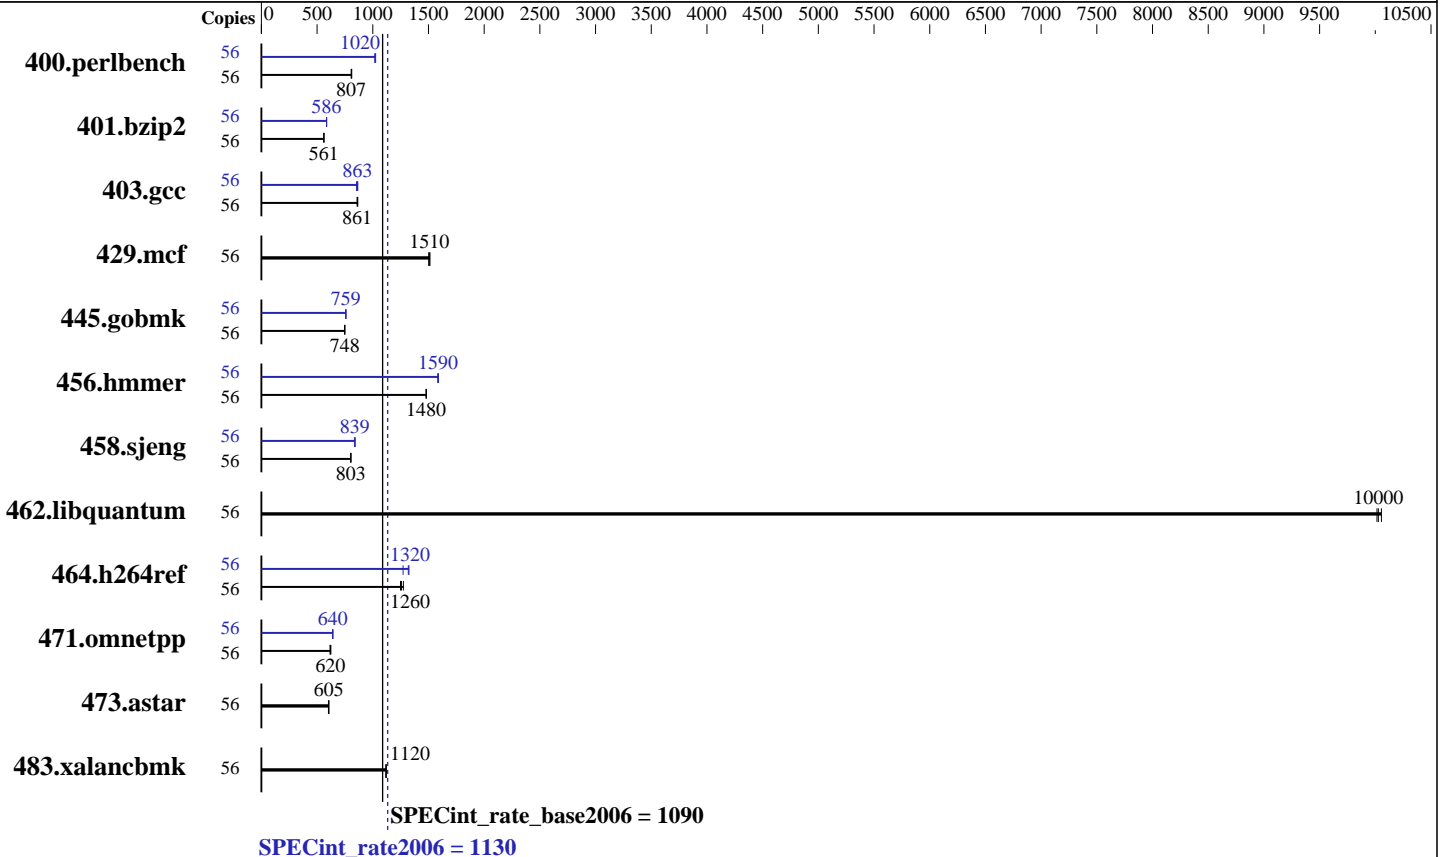

Hardware

CPU Name: Intel Xeon E5-2695 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 35 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 1000.2 GB SATA II, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.0, Kernel 3.10.0-123.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-6028R-TDWNR
(X10DDW-iN , Intel Xeon E5-2695 v3)

SPECint_rate2006 = 1130

SPECint_rate_base2006 = 1090

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Dec-2014
Hardware Availability: Nov-2014
Software Availability: Sep-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	56	678	807	678	807	674	811	56	533	1030	536	1020	537	1020
401.bzip2	56	964	561	962	562	963	561	56	923	586	922	586	924	585
403.gcc	56	521	865	524	860	524	861	56	528	854	521	865	522	863
429.mcf	56	337	1510	339	1510	340	1500	56	337	1510	339	1510	340	1500
445.gobmk	56	785	748	784	750	786	747	56	776	757	774	759	774	759
456.hammer	56	353	1480	353	1480	353	1480	56	330	1580	329	1590	329	1590
458.sjeng	56	843	804	844	803	845	802	56	810	837	808	839	805	842
462.libquantum	56	115	10100	116	10000	116	10000	56	115	10100	116	10000	116	10000
464.h264ref	56	986	1260	972	1270	992	1250	56	940	1320	974	1270	935	1320
471.omnetpp	56	561	624	568	616	564	620	56	547	640	548	639	544	643
473.astar	56	650	605	649	606	653	602	56	650	605	649	606	653	602
483.xalancbmk	56	346	1120	345	1120	345	1120	56	346	1120	345	1120	345	1120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Hyper-Threading (All) = Enabled
COD Enable = Enabled
Early Snoop = Disabled
Enforce POR = Disabled
Sysinfo program /home/SPEC2K6/SPEC2006-V12/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Mon Dec 29 17:45:03 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2695 v3 @ 2.30GHz
2 "physical id"s (chips)
56 "processors"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 1130

SuperServer SYS-6028R-TDWNR
(X10DDW-iN , Intel Xeon E5-2695 v3)

SPECint_rate_base2006 = 1090

CPU2006 license: 001176

Test date: Dec-2014

Test sponsor: Supermicro

Hardware Availability: Nov-2014

Tested by: Supermicro

Software Availability: Sep-2014

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 7
siblings  : 14
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB
```

From /proc/meminfo

```
MemTotal:      263866892 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 29 17:38

SPEC is set to: /home/SPEC2K6/SPEC2006-V12

```
Filesystem      Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  877G 7.5G 870G  1% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.1 12/17/2014

Memory:

```
8x Samsung(data:13/51) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
8x Samsung(data:14/17) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-6028R-TDWNR
(X10DDW-iN , Intel Xeon E5-2695 v3)

SPECint_rate2006 = 1130

SPECint_rate_base2006 = 1090

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Dec-2014
Hardware Availability: Nov-2014
Software Availability: Sep-2014

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/SPEC2K6/SPEC2006-V12/libs/32:/home/SPEC2K6/SPEC2006-V12/libs/64:/home/SPEC2K6/SPEC2006-V12/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmarheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-6028R-TDWNR
(X10DDW-iN , Intel Xeon E5-2695 v3)

SPECint_rate2006 = 1130

SPECint_rate_base2006 = 1090

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Dec-2014
Hardware Availability: Nov-2014
Software Availability: Sep-2014

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-6028R-TDWNR
(X10DDW-iN , Intel Xeon E5-2695 v3)

SPECint_rate2006 = 1130

SPECint_rate_base2006 = 1090

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2014

Hardware Availability: Nov-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 10 18:30:20 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 February 2015.