



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint®\_rate2006 = 968

IBM Flex System x240 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

SPECint\_rate\_base2006 = 938

CPU2006 license: 11


Test date: Jan-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: IBM Corporation

Software Availability: Nov-2013

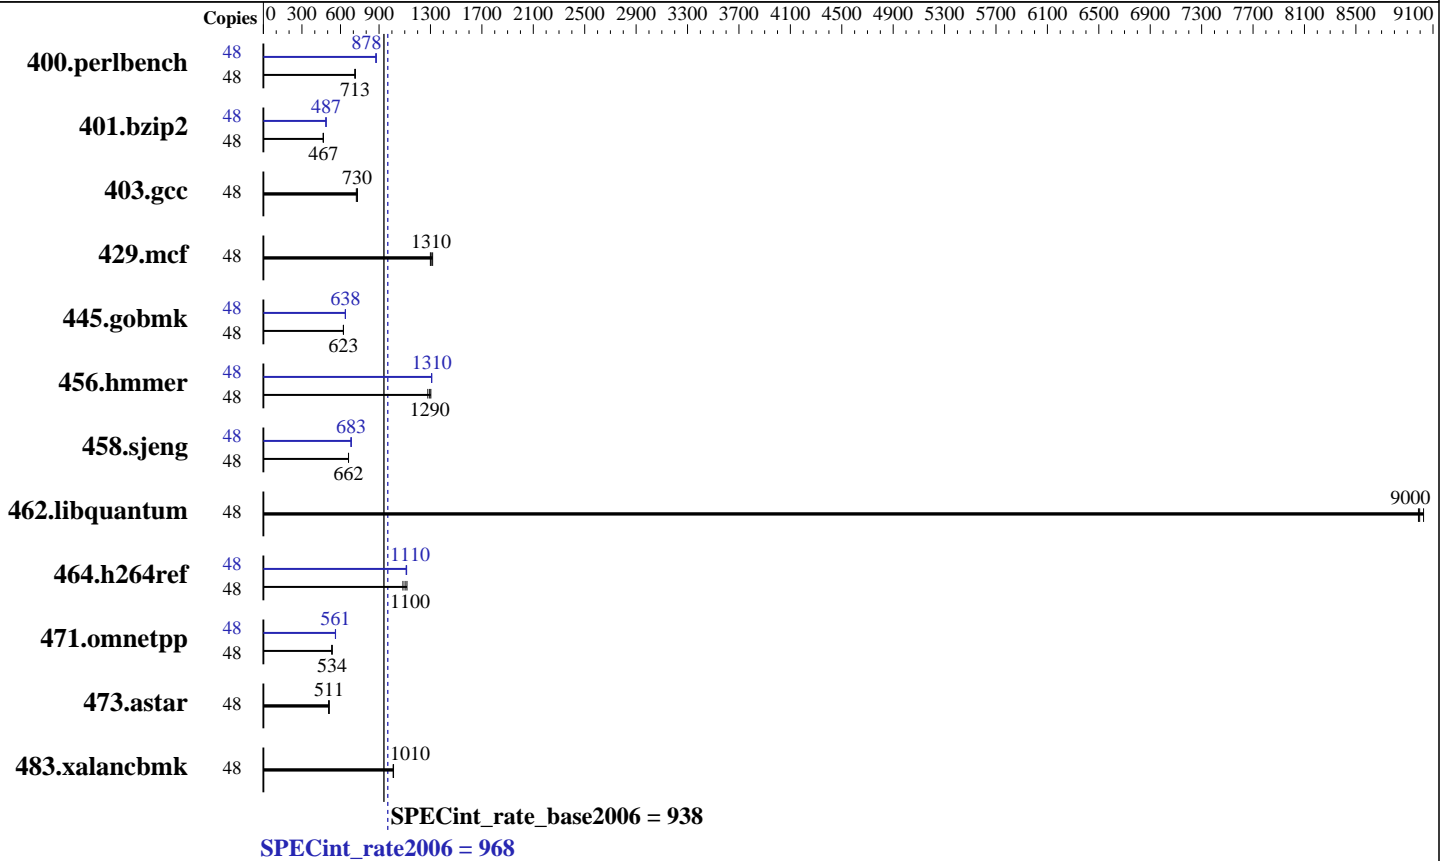

### Hardware

CPU Name: Intel Xeon E5-2658 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 1 TB SAS, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-424.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint\_rate2006 = 968

IBM Flex System x240 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

SPECint\_rate\_base2006 = 938

CPU2006 license: 11

Test date: Jan-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: IBM Corporation

Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	659	712	655	716	<u>657</u>	<u>713</u>	48	<u>534</u>	<u>878</u>	536	875	534	878
401.bzip2	48	994	466	993	467	<u>993</u>	<u>467</u>	48	953	486	<u>950</u>	<u>487</u>	948	488
403.gcc	48	529	731	<u>529</u>	<u>730</u>	534	723	48	529	731	<u>529</u>	<u>730</u>	534	723
429.mcf	48	332	1320	<u>335</u>	<u>1310</u>	337	1300	48	332	1320	<u>335</u>	<u>1310</u>	337	1300
445.gobmk	48	<u>808</u>	<u>623</u>	809	623	808	623	48	789	638	<u>789</u>	<u>638</u>	789	638
456.hammer	48	344	1300	350	1280	<u>346</u>	<u>1290</u>	48	<u>342</u>	<u>1310</u>	342	1310	342	1310
458.sjeng	48	877	662	<u>877</u>	<u>662</u>	876	663	48	851	683	<u>851</u>	<u>683</u>	850	683
462.libquantum	48	110	9030	<u>111</u>	<u>9000</u>	111	8990	48	110	9030	<u>111</u>	<u>9000</u>	111	8990
464.h264ref	48	<u>963</u>	<u>1100</u>	978	1090	951	1120	48	<u>954</u>	<u>1110</u>	956	1110	953	1110
471.omnetpp	48	564	532	560	535	<u>562</u>	<u>534</u>	48	535	561	<u>535</u>	<u>561</u>	534	562
473.astar	48	658	512	<u>660</u>	<u>511</u>	664	508	48	658	512	<u>660</u>	<u>511</u>	664	508
483.xalancbmk	48	<u>328</u>	<u>1010</u>	327	1010	328	1010	48	<u>328</u>	<u>1010</u>	327	1010	328	1010

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Fan speed set to 100%  
Operating Mode set to Maximum Performance in BIOS  
Enable COD Preference in BIOS  
Disable Early Snoop Preference in BIOS  
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on Bonneville-SPECcpu Wed Jan 21 21:36:13 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2658 v3 @ 2.20GHz  
2 "physical id"s (chips)  
48 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint\_rate2006 = 968

IBM Flex System x240 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

SPECint\_rate\_base2006 = 938

CPU2006 license: 11

Test date: Jan-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: IBM Corporation

Software Availability: Nov-2013

### Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 12
siblings  : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 15360 KB
```

From /proc/meminfo

```
MemTotal:      264119260 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux Bonneville-SPECcpu 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST
2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 21 14:45 last=5

SPEC is set to: /cpu2006.1.2

```
Filesystem                                Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_bonnevillespe-lv_root ext4  356G  14G  324G   4% /
```

Additional information from dmidecode:

```
BIOS IBM -[C4E103EUS-1.00]- 11/25/2014
```

Memory:

```
8x NO DIMM Unknown
16x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint\_rate2006 = 968

IBM Flex System x240 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

SPECint\_rate\_base2006 = 938

CPU2006 license: 11

Test date: Jan-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: IBM Corporation

Software Availability: Nov-2013

## General Notes (Continued)

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint\_rate2006 = 968

IBM Flex System x240 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

SPECint\_rate\_base2006 = 938

CPU2006 license: 11

Test date: Jan-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: IBM Corporation

Software Availability: Nov-2013

## Peak Compiler Invocation (Continued)

456.hmmr: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmr: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 968**

IBM Flex System x240 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

**SPECint\_rate\_base2006 = 938**

**CPU2006 license:** 11

**Test date:** Jan-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2014

**Tested by:** IBM Corporation

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-B.20141021.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-B.20141021.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Mar 10 16:37:03 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 February 2015.