



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint®_rate2006 = 698

Huawei XH628 V3 (Intel Xeon E5-2643 v3)

SPECint_rate_base2006 = 668

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

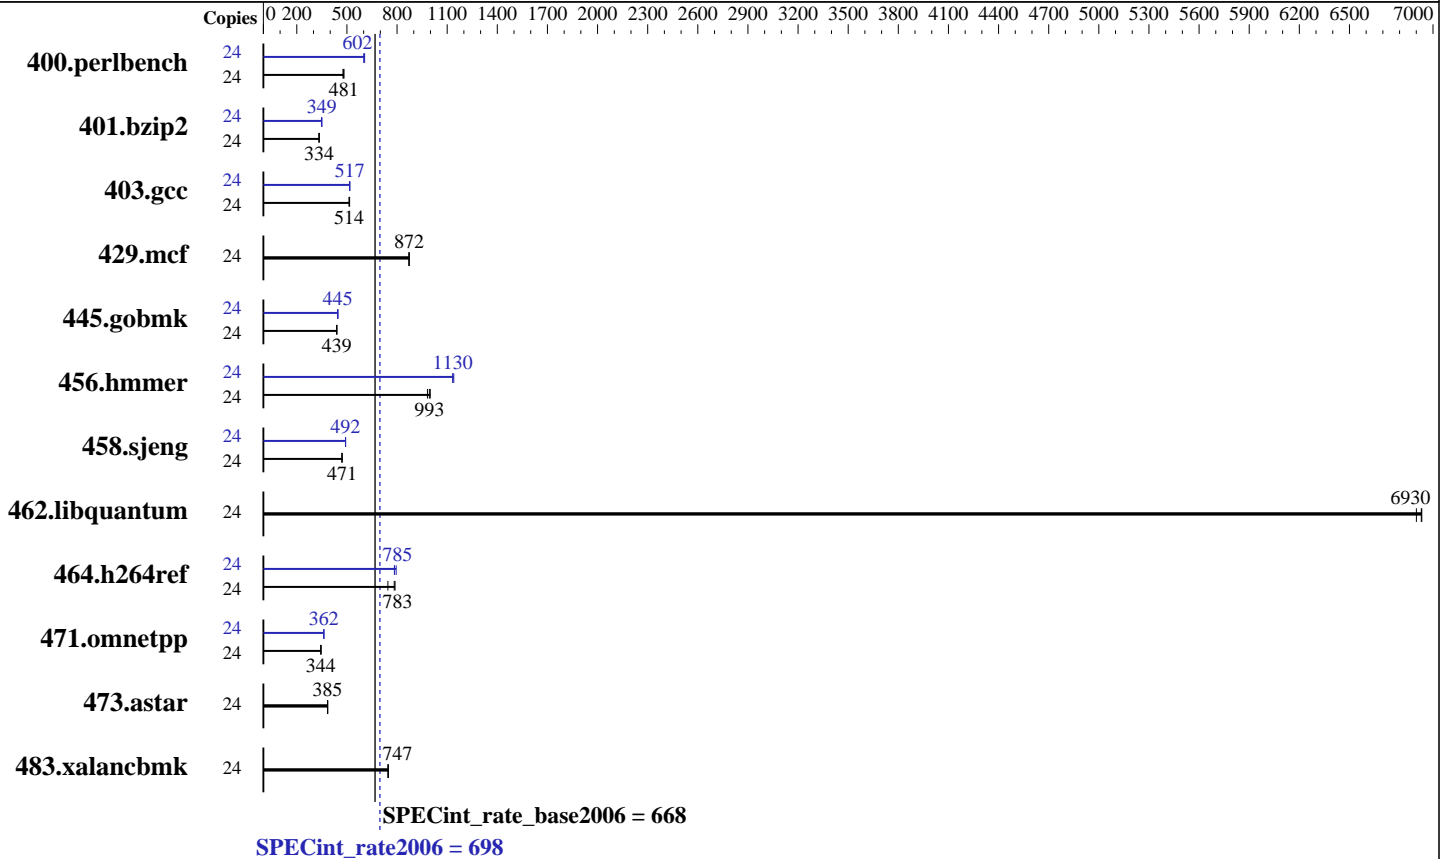

Hardware

CPU Name: Intel Xeon E5-2643 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 3.10.0-123.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 698

Huawei XH628 V3 (Intel Xeon E5-2643 v3)

SPECint_rate_base2006 = 668

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Feb-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	24	492	476	487	482	<u>487</u>	<u>481</u>	24	387	606	390	602	<u>389</u>	<u>602</u>		
401.bzip2	24	694	334	<u>694</u>	<u>334</u>	696	333	24	<u>663</u>	<u>349</u>	662	350	664	349		
403.gcc	24	<u>376</u>	<u>514</u>	374	516	376	513	24	<u>374</u>	<u>517</u>	374	516	373	517		
429.mcf	24	<u>251</u>	<u>872</u>	251	872	251	872	24	<u>251</u>	<u>872</u>	251	872	251	872		
445.gobmk	24	573	439	573	439	<u>573</u>	<u>439</u>	24	566	445	<u>565</u>	<u>445</u>	564	446		
456.hammer	24	224	999	<u>225</u>	<u>993</u>	228	982	24	<u>198</u>	<u>1130</u>	198	1130	197	1140		
458.sjeng	24	<u>616</u>	<u>471</u>	616	471	618	470	24	<u>590</u>	<u>492</u>	590	492	591	491		
462.libquantum	24	<u>71.8</u>	<u>6930</u>	72.1	6900	71.7	6930	24	<u>71.8</u>	<u>6930</u>	72.1	6900	71.7	6930		
464.h264ref	24	713	745	<u>678</u>	<u>783</u>	674	788	24	<u>677</u>	<u>785</u>	677	784	668	795		
471.omnetpp	24	436	344	435	345	<u>436</u>	<u>344</u>	24	416	361	<u>414</u>	<u>362</u>	414	362		
473.astar	24	438	384	438	385	<u>438</u>	<u>385</u>	24	438	384	438	385	<u>438</u>	<u>385</u>		
483.xalancbmk	24	221	748	<u>222</u>	<u>747</u>	222	746	24	221	748	<u>222</u>	<u>747</u>	222	746		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Performance
Set Snoop Mode to ES mode
Sysinfo program /spec/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Sat Feb 14 05:02:02 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2643 v3 @ 3.40GHz
2 "physical id"s (chips)
24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 698

Huawei XH628 V3 (Intel Xeon E5-2643 v3)

SPECint_rate_base2006 = 668

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Feb-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

Platform Notes (Continued)

```
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      263578448 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 14 05:00
```

```
SPEC is set to: /spec
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda2       xfs       445G      206G   240G  47% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Insyde Corp. 1.23 11/19/2014
Memory:
4x Micron 36ASF2G72PZ-2G1A2 16 GB 1 rank 2133 MHz
4x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz
4x Samsung M393A2G40DB0-CPB 16 GB 1 rank 2133 MHz
4x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 698

Huawei XH628 V3 (Intel Xeon E5-2643 v3)

SPECint_rate_base2006 = 668

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

The Huawei XH622 V3 and Huawei XH628 V3

are electronically equivalent.

The results have been measured on a Huawei XH628 V3 model.

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 698

Huawei XH628 V3 (Intel Xeon E5-2643 v3)

SPECint_rate_base2006 = 668

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Base Other Flags (Continued)

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 698

Huawei XH628 V3 (Intel Xeon E5-2643 v3)

SPECint_rate_base2006 = 668

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 698

Huawei XH628 V3 (Intel Xeon E5-2643 v3)

SPECint_rate_base2006 = 668

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Mar 10 16:01:35 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 March 2015.