



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint®_rate2006 = 531

SPECint_rate_base2006 = 509

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

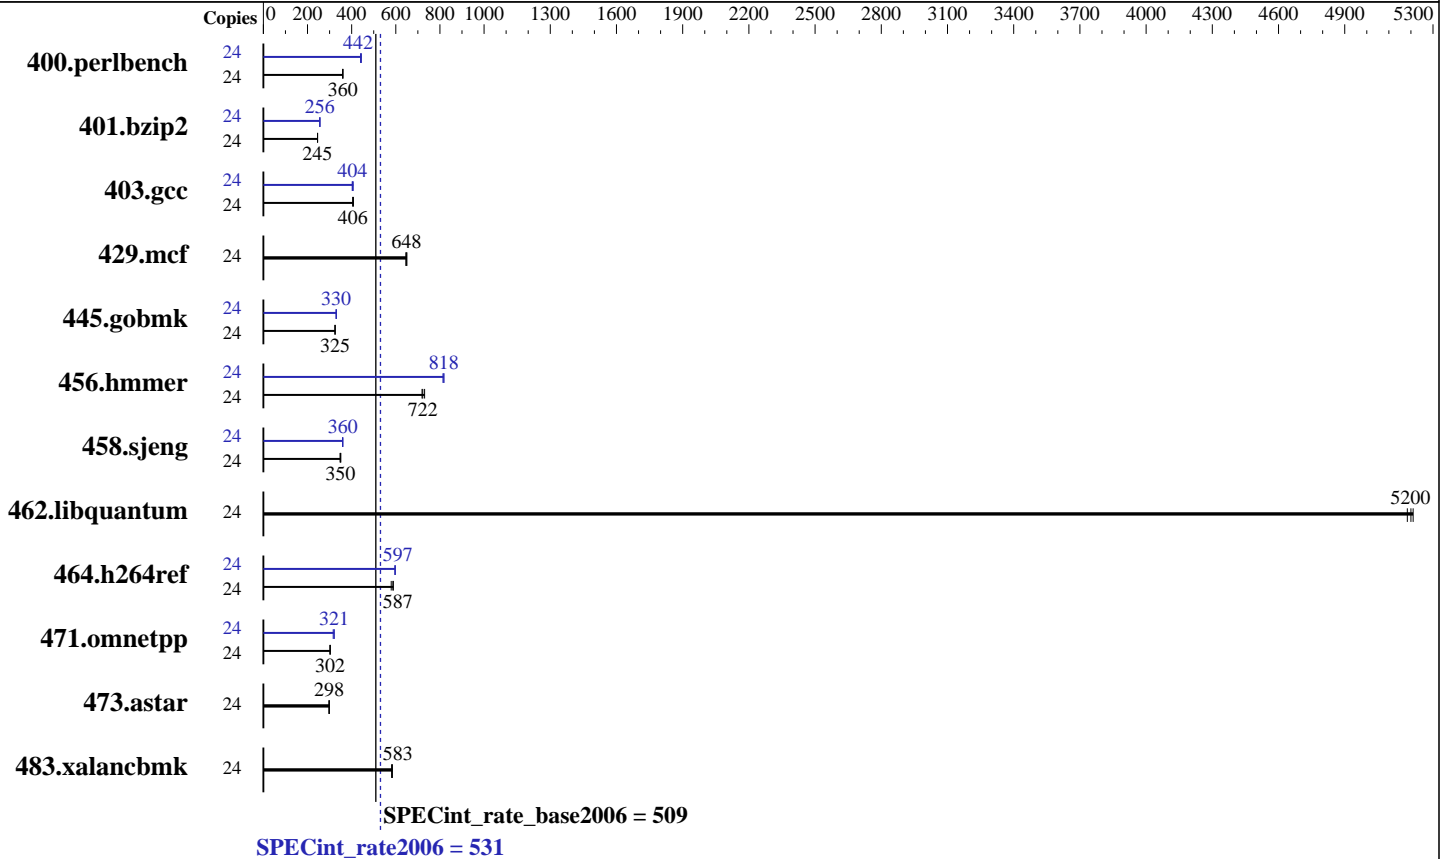

Hardware

CPU Name: Intel Xeon E5-2620 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
 Disk Subsystem: 1 x 240 GB SATA II SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 3.10.0-123.20.1.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate2006 = 531

SPECint_rate_base2006 = 509

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Mar-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<u>651</u>	<u>360</u>	652	360	651	360	24	528	444	532	440	<u>530</u>	<u>442</u>
401.bzip2	24	942	246	<u>944</u>	<u>245</u>	944	245	24	905	256	<u>905</u>	<u>256</u>	905	256
403.gcc	24	<u>476</u>	<u>406</u>	477	405	473	408	24	<u>478</u>	<u>404</u>	474	407	480	402
429.mcf	24	337	650	<u>338</u>	<u>648</u>	339	646	24	337	650	<u>338</u>	<u>648</u>	339	646
445.gobmk	24	775	325	775	325	<u>775</u>	<u>325</u>	24	762	330	763	330	<u>763</u>	<u>330</u>
456.hammer	24	311	719	306	731	<u>310</u>	<u>722</u>	24	275	814	274	818	<u>274</u>	<u>818</u>
458.sjeng	24	828	351	836	347	<u>830</u>	<u>350</u>	24	810	359	<u>807</u>	<u>360</u>	807	360
462.libquantum	24	95.4	5210	95.9	5180	<u>95.6</u>	<u>5200</u>	24	95.4	5210	95.9	5180	<u>95.6</u>	<u>5200</u>
464.h264ref	24	<u>905</u>	<u>587</u>	917	579	902	589	24	891	596	<u>890</u>	<u>597</u>	889	597
471.omnetpp	24	497	302	<u>496</u>	<u>302</u>	494	303	24	<u>468</u>	<u>321</u>	474	316	468	321
473.astar	24	566	297	<u>565</u>	<u>298</u>	564	299	24	566	297	<u>565</u>	<u>298</u>	564	299
483.xalancbmk	24	285	581	283	584	<u>284</u>	<u>583</u>	24	285	581	283	584	<u>284</u>	<u>583</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings:
Power & Performance = Performance
Enforce POR = Disabled
Memory Operating Speed Selection = Auto
Set Fan Profile = Performance
Fan PWM Offset = 0

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Tue Mar 10 17:56:34 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate2006 = 531

SPECint_rate_base2006 = 509

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Platform Notes (Continued)

```

model name : Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
  2 "physical id"s (chips)
  24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      263869284 kB
HugePages_Total:    0
Hugepagesize:   2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 7.0 (Maipo)

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

```

```

uname -a:
Linux localhost.localdomain 3.10.0-123.20.1.el7.x86_64 #3 SMP Wed Feb 4
14:55:18 CET 2015 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Mar 10 15:59

```

SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1       ext4  212G   33G  168G  17% /

```

```

Additional information from dmidecode:
BIOS Intel Corporation SE5C610.86B.01.01.0008.021120151325 02/11/2015
Memory:
16x 16 GB
16x Micron 36ASF2G72PZ-2G1A2 16 GB 1866 MHz 2 rank
8x NO DIMM NO DIMM

```

(End of data from sysinfo program) Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 531

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate_base2006 = 509

CPU2006 license: 9008

Test date: Mar-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

Platform Notes (Continued)

dmidecode does not properly detect memory modules
16 modules of 16 GB were used to run the test (256 GB total)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory
using RedHat EL 7.0

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate2006 = 531

SPECint_rate_base2006 = 509

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 531

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate_base2006 = 509

CPU2006 license: 9008

Test date: Mar-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevA-mar-2015-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevA-mar-2015-For-Intel-Platform.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate2006 = 531

SPECint_rate_base2006 = 509

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Apr 8 11:03:30 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 April 2015.