



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)

**SPECfp<sup>®</sup>\_rate2006 = 698**

**SPECfp\_rate\_base2006 = 682**

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

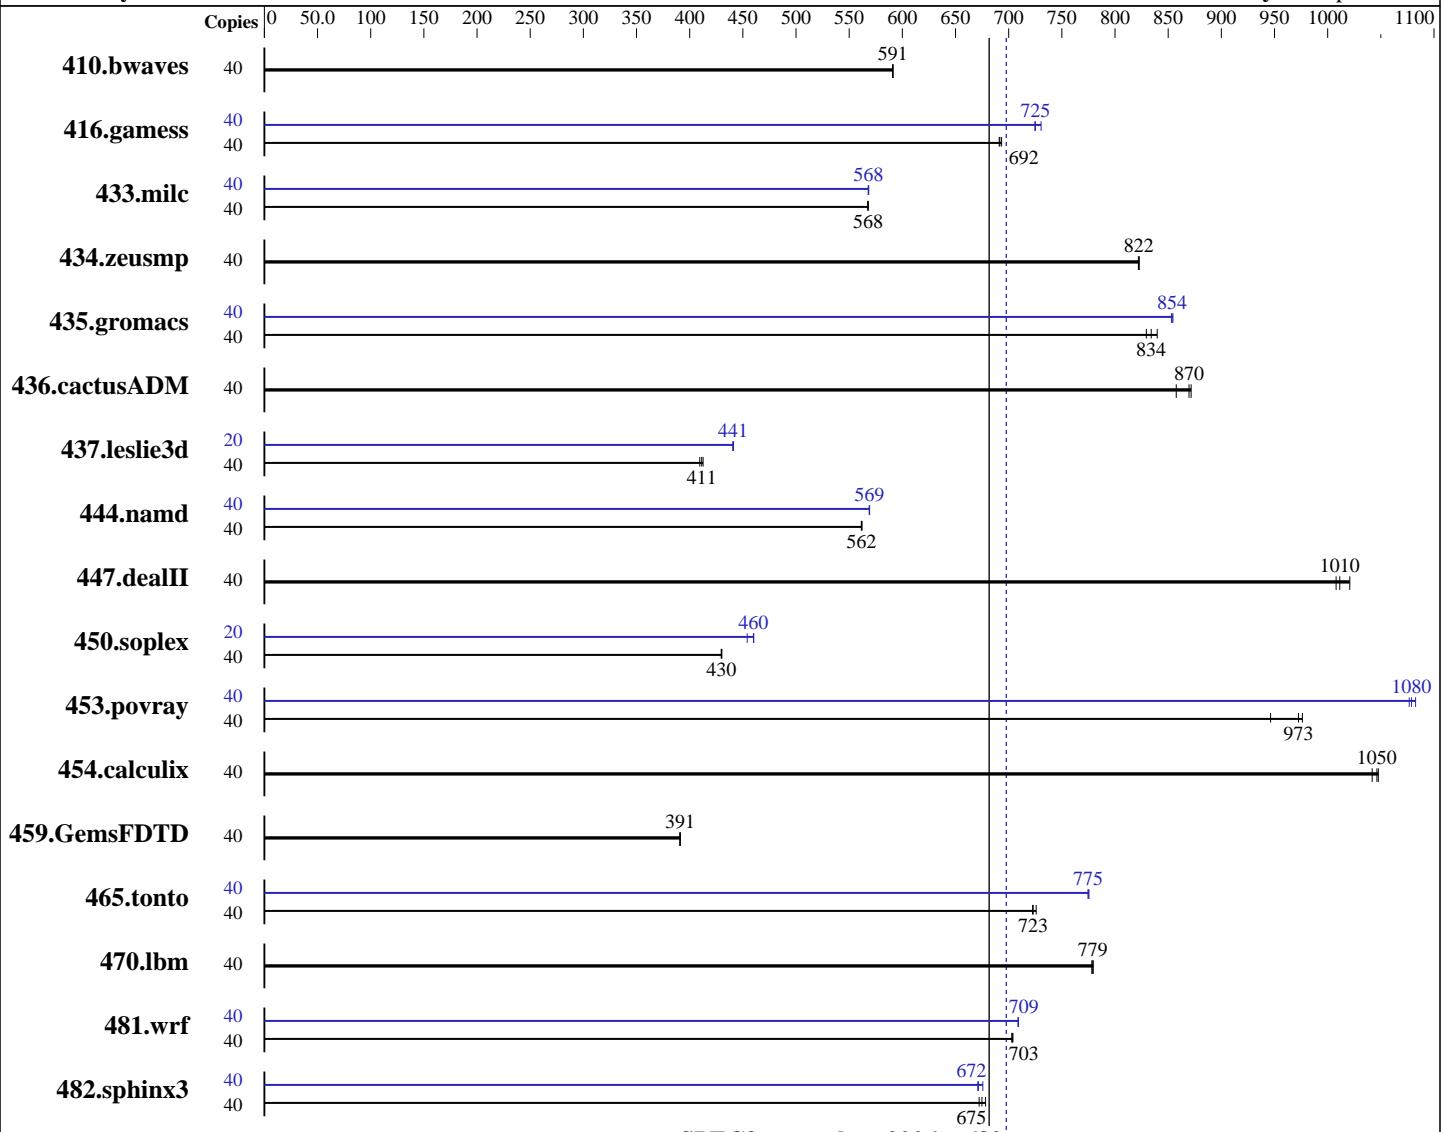

**SPECfp\_rate\_base2006 = 682**

**SPECfp\_rate2006 = 698**

## Hardware

CPU Name: Intel Xeon E5-2650 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
CPU MHz: 2300  
FPU: Integrated  
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 6.6 (Santiago)  
Compiler: 2.6.32-504.8.1.el6.x86\_64  
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)

**SPECfp\_rate2006 = 698**

**SPECfp\_rate\_base2006 = 682**

CPU2006 license: 9008

Test date: Mar-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 240 GB SATA II SSD  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	920	591	<b>920</b>	<b>591</b>	919	591	40	920	591	<b>920</b>	<b>591</b>	919	591
416.gamess	40	1130	693	<b>1132</b>	<b>692</b>	1133	691	40	1081	725	1072	730	<b>1080</b>	<b>725</b>
433.milc	40	647	568	<b>647</b>	<b>568</b>	647	567	40	646	568	<b>646</b>	<b>568</b>	647	568
434.zeusmp	40	443	822	<b>443</b>	<b>822</b>	442	823	40	443	822	<b>443</b>	<b>822</b>	442	823
435.gromacs	40	<b>342</b>	<b>834</b>	340	840	344	829	40	334	854	335	853	<b>335</b>	<b>854</b>
436.cactusADM	40	557	858	548	872	<b>550</b>	<b>870</b>	40	557	858	548	872	<b>550</b>	<b>870</b>
437.leslie3d	40	<b>914</b>	<b>411</b>	918	409	911	413	20	426	441	427	441	<b>426</b>	<b>441</b>
444.namd	40	571	562	571	561	<b>571</b>	<b>562</b>	40	<b>564</b>	<b>569</b>	564	569	564	569
447.dealII	40	454	1010	<b>452</b>	<b>1010</b>	448	1020	40	454	1010	<b>452</b>	<b>1010</b>	448	1020
450.soplex	40	775	430	776	430	<b>776</b>	<b>430</b>	20	367	454	362	460	<b>363</b>	<b>460</b>
453.povray	40	<b>219</b>	<b>973</b>	218	976	225	946	40	197	1080	198	1080	<b>197</b>	<b>1080</b>
454.calculix	40	315	1050	317	1040	<b>315</b>	<b>1050</b>	40	315	1050	317	1040	<b>315</b>	<b>1050</b>
459.GemsFDTD	40	<b>1085</b>	<b>391</b>	1086	391	1085	391	40	<b>1085</b>	<b>391</b>	1086	391	1085	391
465.tonto	40	545	722	542	726	<b>544</b>	<b>723</b>	40	508	775	508	775	<b>508</b>	<b>775</b>
470.lbm	40	<b>705</b>	<b>779</b>	706	778	705	779	40	<b>705</b>	<b>779</b>	706	778	705	779
481.wrf	40	636	703	635	704	<b>635</b>	<b>703</b>	40	<b>630</b>	<b>709</b>	630	709	630	709
482.sphinx3	40	1149	678	1160	672	<b>1155</b>	<b>675</b>	40	1162	671	1154	676	<b>1161</b>	<b>672</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Bios Settings:

Power & Performance = Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)

**SPECfp\_rate2006 = 698**

**SPECfp\_rate\_base2006 = 682**

CPU2006 license: 9008

Test date: Mar-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

## Platform Notes (Continued)

Enforce POR = Disabled

Memory Operating Speed Selection = 2133

Cluster-on-Die = Enabled

Set Fan Profile = Performance

Fan PWM Offset = 0

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191  
running on SUT Tue Mar 17 16:30:14 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2650 v3 @ 2.30GHz  
2 "physical id"s (chips)  
40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10  
siblings : 20  
physical 0: cores 0 1 2 3 4 8 9 10 11 12  
physical 1: cores 0 1 2 3 4 8 9 10 11 12  
cache size : 12800 KB

From /proc/meminfo

MemTotal: 264421888 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
Red Hat Enterprise Linux Server release 6.6 (Santiago)

From /etc/\*release\* /etc/\*version\*

redhat-release: Red Hat Enterprise Linux Server release 6.6 (Santiago)  
system-release: Red Hat Enterprise Linux Server release 6.6 (Santiago)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:

Linux SUT 2.6.32-504.8.1.el6.x86\_64 #1 SMP Wed Mar 11 12:12:13 CET 2015  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Mar 17 16:23

SPEC is set to: /cpu2006.1.2

Filesystem Type Size Used Avail Use% Mounted on  
/dev/sdal ext4 212G 37G 165G 18% /

Additional information from dmidecode:

BIOS Intel Corporation SE5C610.86B.01.01.0008.021120151325 02/11/2015  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)

**SPECfp\_rate2006 = 698**

**SPECfp\_rate\_base2006 = 682**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Mar-2015

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Platform Notes (Continued)

### Memory:

16x 16 GB  
16x Micron 36ASF2G72PZ-2G1A2 16 GB 2134 MHz 2 rank  
8x NO DIMM NO DIMM

(End of data from sysinfo program)

dmidecode does not properly detect memory modules  
16 modules of 16 GB were used to run the test (256 GB total)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory  
using RedHat EL 6.6

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)

**SPECfp\_rate2006 = 698**

**SPECfp\_rate\_base2006 = 682**

CPU2006 license: 9008

Test date: Mar-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

## Base Portability Flags (Continued)

```
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECfp_rate2006 =</b> 698
ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)	<b>SPECfp_rate_base2006 =</b> 682
<b>CPU2006 license:</b> 9008	<b>Test date:</b> Mar-2015
<b>Test sponsor:</b> ACTION S.A.	<b>Hardware Availability:</b> Sep-2014
<b>Tested by:</b> ACTION S.A.	<b>Software Availability:</b> Sep-2014

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
    433.milc: -DSPEC\_CPU\_LP64  
    434.zeusmp: -DSPEC\_CPU\_LP64  
    435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
    437.leslie3d: -DSPEC\_CPU\_LP64  
        444.namd: -DSPEC\_CPU\_LP64  
        447.dealII: -DSPEC\_CPU\_LP64  
        453.povray: -DSPEC\_CPU\_LP64  
        454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
    465.tonto: -DSPEC\_CPU\_LP64  
        470.lbm: -DSPEC\_CPU\_LP64  
            481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
    -O3(pass 2) -no-prec-div(pass 2)  
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
    -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
    -unroll12

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
    -O3(pass 2) -no-prec-div(pass 2)  
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
    -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
    -O3(pass 2) -no-prec-div(pass 2)  
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
    -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
    -O3(pass 2) -no-prec-div(pass 2)  
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14  
    -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)

**SPECfp\_rate2006 = 698**

**SPECfp\_rate\_base2006 = 682**

**CPU2006 license:** 9008

**Test date:** Mar-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevA-mar-2015-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevA-mar-2015-For-Intel-Platform.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)

**SPECfp\_rate2006 = 698**

**SPECfp\_rate\_base2006 = 682**

**CPU2006 license:** 9008

**Test date:** Mar-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Apr 8 11:03:31 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 April 2015.