



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 786

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECint\_rate\_base2006 = 754

CPU2006 license: 55


Test date: Mar-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

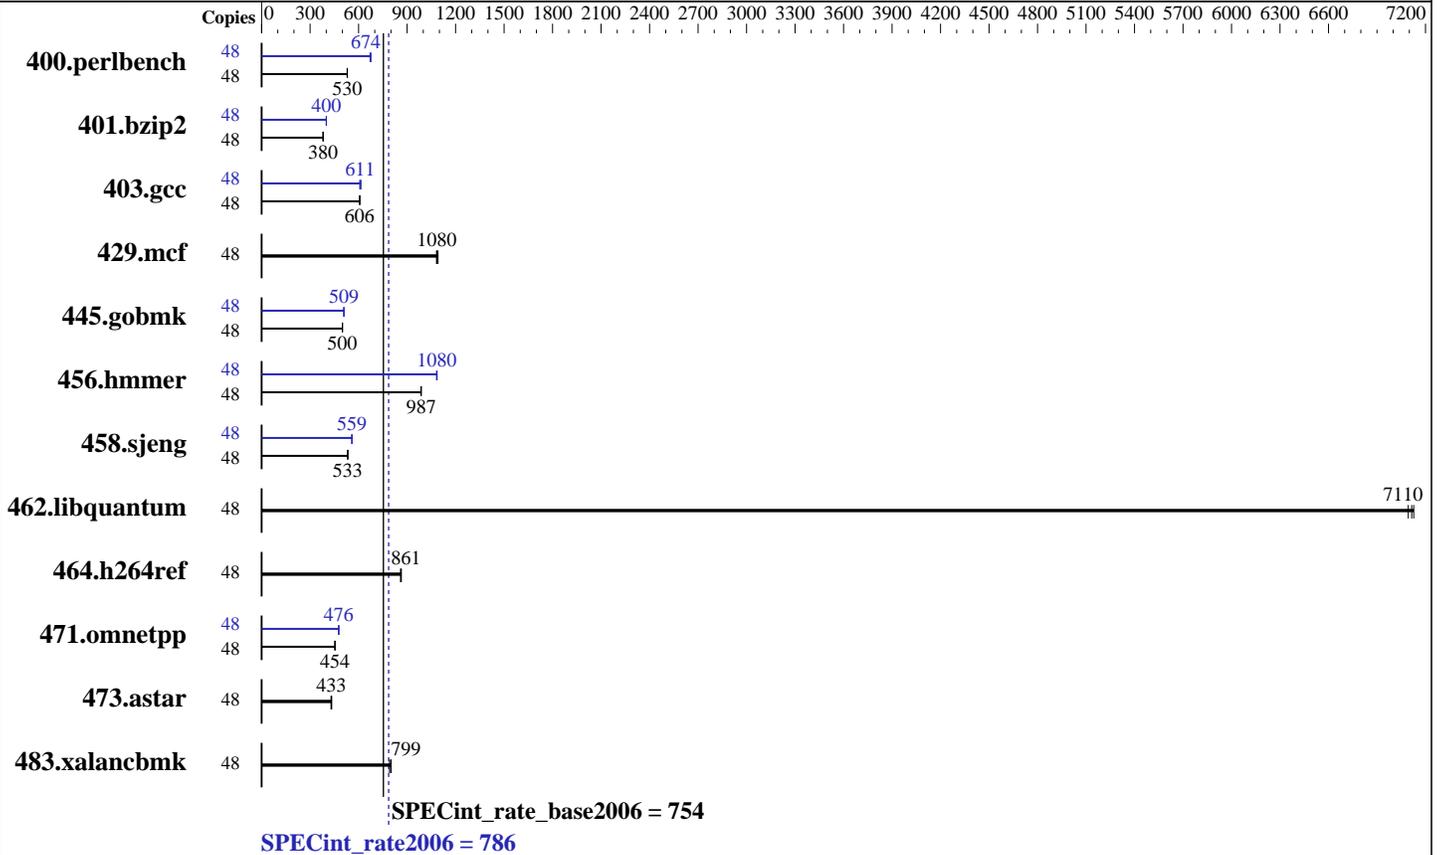

### Hardware

CPU Name: Intel Xeon E5-2650L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 120 GB SSD SATA  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12  
 3.12.28-4-default  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 786

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECint\_rate\_base2006 = 754

CPU2006 license: 55

Test date: Mar-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	48	887	529	884	531	<b>885</b>	<b>530</b>	48	<b>696</b>	<b>674</b>	699	671	693	676		
401.bzip2	48	<b>1218</b>	<b>380</b>	1218	380	1216	381	48	1156	401	<b>1157</b>	<b>400</b>	1158	400		
403.gcc	48	<b>637</b>	<b>606</b>	637	606	635	608	48	628	615	<b>632</b>	<b>611</b>	636	607		
429.mcf	48	<b>404</b>	<b>1080</b>	401	1090	405	1080	48	<b>404</b>	<b>1080</b>	401	1090	405	1080		
445.gobmk	48	1005	501	<b>1007</b>	<b>500</b>	1008	500	48	988	509	<b>989</b>	<b>509</b>	990	509		
456.hammer	48	454	987	<b>454</b>	<b>987</b>	454	986	48	<b>413</b>	<b>1080</b>	414	1080	413	1090		
458.sjeng	48	1089	533	<b>1090</b>	<b>533</b>	1090	533	48	<b>1040</b>	<b>559</b>	1040	558	1039	559		
462.libquantum	48	140	7130	140	7090	<b>140</b>	<b>7110</b>	48	140	7130	140	7090	<b>140</b>	<b>7110</b>		
464.h264ref	48	1229	865	1235	860	<b>1234</b>	<b>861</b>	48	1229	865	1235	860	<b>1234</b>	<b>861</b>		
471.omnetpp	48	660	454	662	453	<b>660</b>	<b>454</b>	48	630	476	<b>630</b>	<b>476</b>	627	479		
473.astar	48	785	429	<b>779</b>	<b>433</b>	778	433	48	785	429	<b>779</b>	<b>433</b>	778	433		
483.xalancbmk	48	413	801	<b>415</b>	<b>799</b>	419	791	48	413	801	<b>415</b>	<b>799</b>	419	791		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:

Snoop Mode set to Cluster on Die

Virtualization Technology disabled

System Profile set to Performance

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-kc7s Thu Mar 26 18:03:39 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2650L v3 @ 1.80GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 786

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECint\_rate\_base2006 = 754

CPU2006 license: 55

Test date: Mar-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

## Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings  : 12
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 15360 KB
```

From /proc/meminfo

```
MemTotal:      132051252 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 12
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

uname -a:

```
Linux linux-kc7s 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 26 18:02 last=5

SPEC is set to: /root/cpu2006-1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  108G   8.5G   99G   8% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.5 03/10/2015

Memory:

```
4x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 786

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECint\_rate\_base2006 = 754

CPU2006 license: 55

Test date: Mar-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

## Platform Notes (Continued)

2x 00AD063200AD HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz  
2x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 786

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECint\_rate\_base2006 = 754

CPU2006 license: 55

Test date: Mar-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 786

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECint\_rate\_base2006 = 754

CPU2006 license: 55

Test date: Mar-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

## Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.xml>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 786

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECint\_rate\_base2006 = 754

CPU2006 license: 55

Test date: Mar-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Apr 21 18:22:58 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 April 2015.