



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>\_rate2006 = **895**

PRIMERGY RX2530 M1, Intel Xeon E5-2698 v3, 2.3 GHz

SPECfp\_rate\_base2006 = **869**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2015

Hardware Availability: Feb-2015

Software Availability: Sep-2014

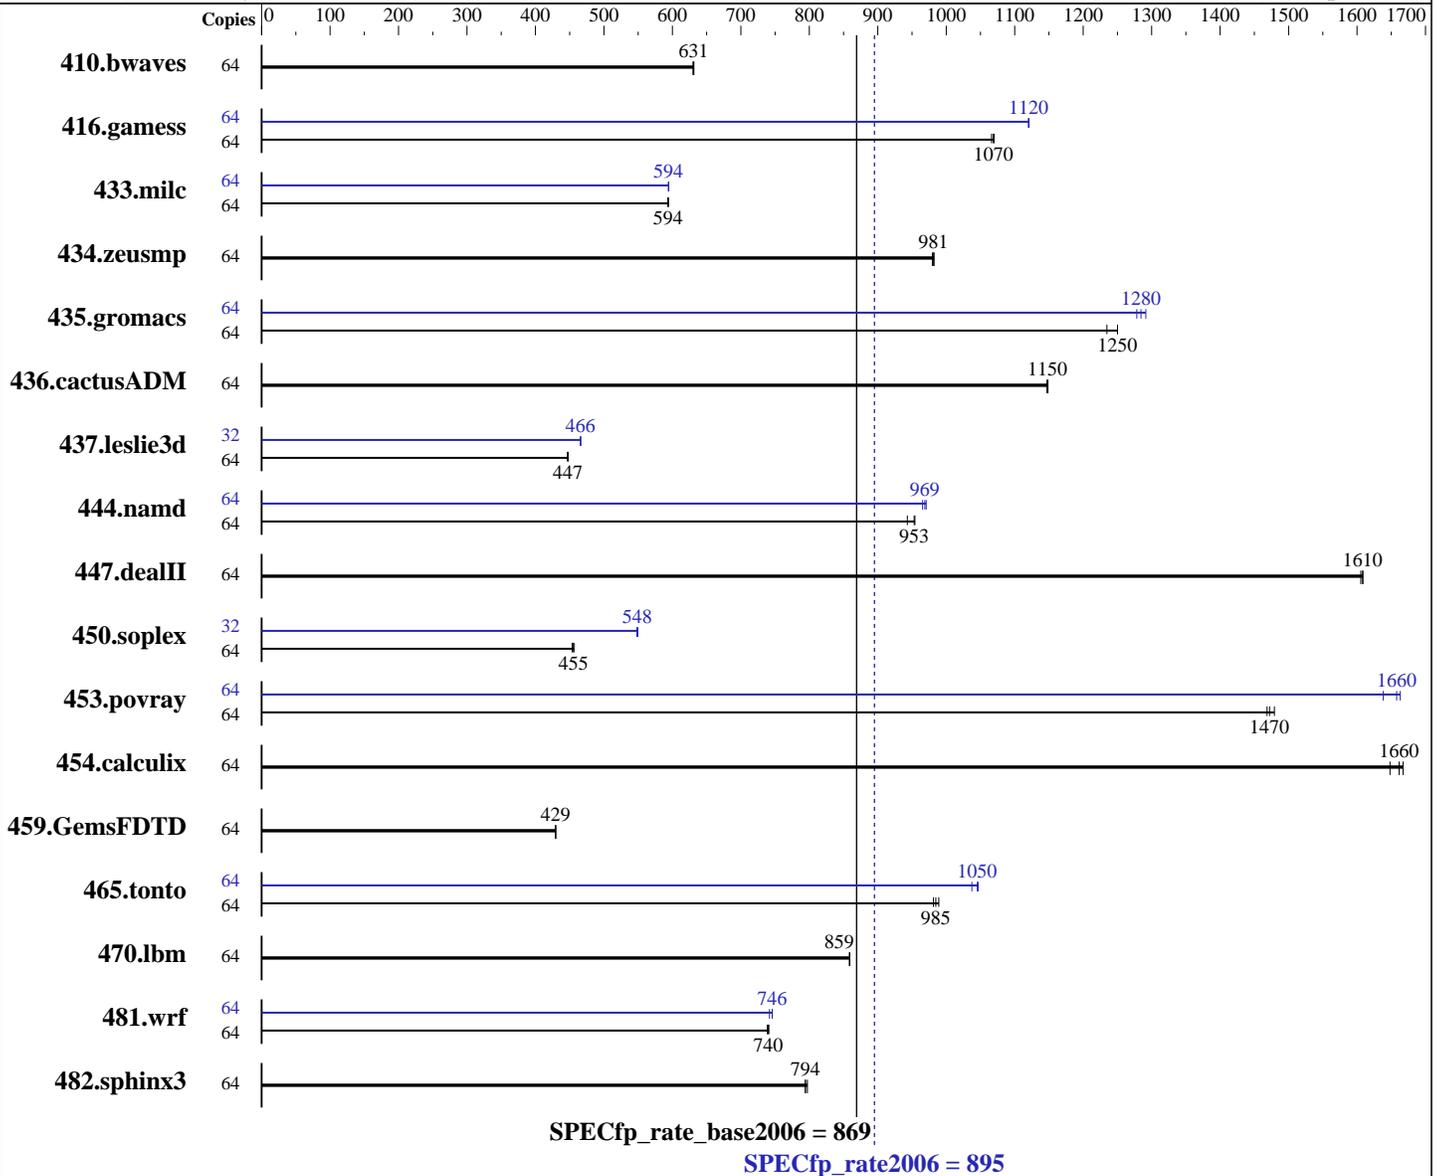

### Hardware

CPU Name: Intel Xeon E5-2698 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 Kernel 3.10.0-123.8.1.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = **895**

PRIMERGY RX2530 M1, Intel Xeon E5-2698 v3, 2.3 GHz

SPECfp\_rate\_base2006 = **869**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2015

Hardware Availability: Feb-2015

Software Availability: Sep-2014

L3 Cache: 40 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	<b>1378</b>	<b>631</b>	1378	631	1381	630	64	<b>1378</b>	<b>631</b>	1378	631	1381	630
416.gamess	64	<b>1172</b>	<b>1070</b>	1171	1070	1175	1070	64	1119	1120	1118	1120	<b>1118</b>	<b>1120</b>
433.milc	64	<b>990</b>	<b>594</b>	990	594	989	594	64	989	594	<b>988</b>	<b>594</b>	988	595
434.zeusmp	64	593	982	594	980	<b>593</b>	<b>981</b>	64	593	982	594	980	<b>593</b>	<b>981</b>
435.gromacs	64	366	1250	370	1230	<b>366</b>	<b>1250</b>	64	354	1290	<b>356</b>	<b>1280</b>	357	1280
436.cactusADM	64	667	1150	666	1150	<b>666</b>	<b>1150</b>	64	667	1150	666	1150	<b>666</b>	<b>1150</b>
437.leslie3d	64	1344	448	1346	447	<b>1345</b>	<b>447</b>	32	646	466	645	466	<b>646</b>	<b>466</b>
444.namd	64	<b>539</b>	<b>953</b>	538	954	544	943	64	529	971	<b>530</b>	<b>969</b>	532	965
447.dealII	64	456	1610	<b>455</b>	<b>1610</b>	455	1610	64	456	1610	<b>455</b>	<b>1610</b>	455	1610
450.soplex	64	1170	456	<b>1172</b>	<b>455</b>	1177	454	32	<b>487</b>	<b>548</b>	487	548	486	550
453.povray	64	232	1470	230	1480	<b>231</b>	<b>1470</b>	64	208	1640	<b>205</b>	<b>1660</b>	205	1660
454.calculix	64	320	1650	317	1670	<b>318</b>	<b>1660</b>	64	320	1650	317	1670	<b>318</b>	<b>1660</b>
459.GemsFDTD	64	1581	429	<b>1581</b>	<b>429</b>	1581	430	64	1581	429	<b>1581</b>	<b>429</b>	1581	430
465.tonto	64	<b>639</b>	<b>985</b>	642	981	637	989	64	607	1040	602	1050	<b>602</b>	<b>1050</b>
470.lbm	64	1024	859	1024	859	<b>1024</b>	<b>859</b>	64	1024	859	1024	859	<b>1024</b>	<b>859</b>
481.wrf	64	965	741	968	739	<b>966</b>	<b>740</b>	64	964	742	<b>959</b>	<b>746</b>	958	746
482.sphinx3	64	1565	797	<b>1571</b>	<b>794</b>	1571	794	64	1565	797	<b>1571</b>	<b>794</b>	1571	794

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Energy Performance = Performance  
QPI snoop mode: Cluster on Die

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = 895

PRIMERGY RX2530 M1, Intel Xeon E5-2698 v3, 2.3 GHz

SPECfp\_rate\_base2006 = 869

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2015

Hardware Availability: Feb-2015

Software Availability: Sep-2014

## Platform Notes (Continued)

COD Enable = Enabled, Early Snoop = Disabled  
CPU C1E Support = Disabled  
QPI Link Frequency Select = 6.4 GT/s

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 895**

PRIMERGY RX2530 M1, Intel Xeon E5-2698 v3, 2.3 GHz

**SPECfp\_rate\_base2006 = 869**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jan-2015

**Hardware Availability:** Feb-2015

**Software Availability:** Sep-2014

## Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
 -ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
 -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
 -ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 895**

PRIMERGY RX2530 M1, Intel Xeon E5-2698 v3, 2.3 GHz

**SPECfp\_rate\_base2006 = 869**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jan-2015

**Hardware Availability:** Feb-2015

**Software Availability:** Sep-2014

## Peak Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
          -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 895**

PRIMERGY RX2530 M1, Intel Xeon E5-2698 v3, 2.3 GHz

**SPECfp\_rate\_base2006 = 869**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jan-2015

**Hardware Availability:** Feb-2015

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 19 18:13:14 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 May 2015.