



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2560 M1, Intel Xeon E5-2650L v3, 1.8 GHz

SPECfp®_rate2006 = 659

SPECfp_rate_base2006 = 642

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2015

Hardware Availability: Apr-2015

Software Availability: Sep-2014

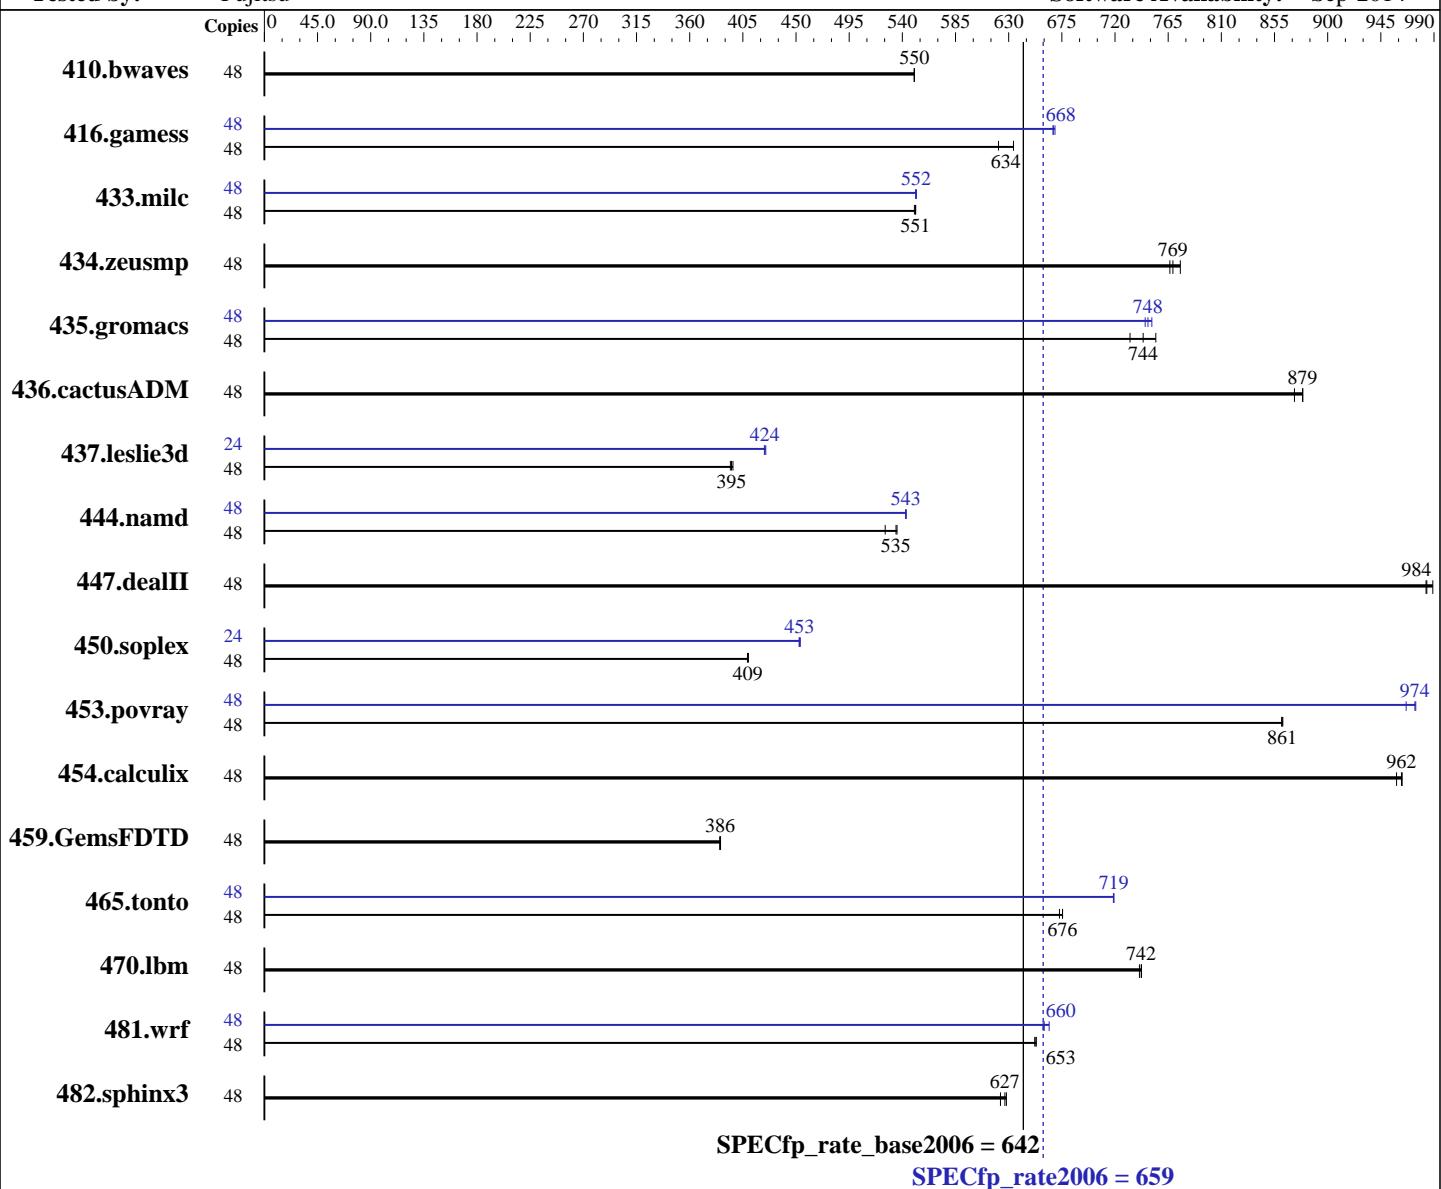

Hardware

CPU Name: Intel Xeon E5-2650L v3
CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz: 1800
FPU: Integrated
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)
Compiler: Kernel 3.10.0-229.el7.x86_64
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2560 M1, Intel Xeon E5-2650L v3, 1.8 GHz

SPECfp_rate2006 = 659

SPECfp_rate_base2006 = 642

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2015

Hardware Availability: Apr-2015

Software Availability: Sep-2014

L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1186	550	1186	550	1186	550	48	1186	550	1186	550	1186	550
416.gamess	48	1512	621	1482	634	1482	634	48	1407	668	1404	669	1408	668
433.milc	48	801	550	799	551	799	551	48	799	552	799	552	799	551
434.zeusmp	48	563	775	570	766	568	769	48	563	775	570	766	568	769
435.gromacs	48	461	744	454	755	468	733	48	456	751	458	748	460	746
436.cactusADM	48	658	872	653	879	653	879	48	658	872	653	879	653	879
437.leslie3d	48	1144	394	1138	397	1141	395	24	532	424	533	424	533	423
444.namd	48	720	535	733	525	719	536	48	709	543	709	543	709	543
447.dealII	48	555	989	558	984	558	983	48	555	989	558	984	558	983
450.soplex	48	978	409	977	410	979	409	24	442	453	442	453	441	454
453.povray	48	296	861	297	861	296	862	48	262	974	262	975	264	966
454.calculix	48	413	958	411	963	411	962	48	413	958	411	963	411	962
459.GemsFDTD	48	1321	385	1319	386	1320	386	48	1321	385	1319	386	1320	386
465.tonto	48	702	673	699	676	699	676	48	657	719	657	719	657	719
470.lbm	48	890	741	889	742	888	742	48	890	741	889	742	888	742
481.wrf	48	821	653	821	653	822	652	48	807	664	812	660	813	659
482.sphinx3	48	1502	623	1493	627	1489	628	48	1502	623	1493	627	1489	628

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Energy Performance = Performance
 Utilization Profile = Unbalanced

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2560 M1, Intel Xeon E5-2650L v3, 1.8 GHz

SPECfp_rate2006 = 659

SPECfp_rate_base2006 = 642

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2015

Hardware Availability: Apr-2015

Software Availability: Sep-2014

Platform Notes (Continued)

QPI snoop mode: Early Snoop
COD Enable = Disabled, Early Snoop = Enabled
CPU C1E Support = Disabled

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

This result was measured on the PRIMERGY RX2560 M1. The PRIMERGY RX2560 M1 and the PRIMERGY TX2560 M1 are electronically equivalent.
For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2560 M1, Intel Xeon E5-2650L v3, 1.8 GHz

SPECfp_rate2006 = 659

SPECfp_rate_base2006 = 642

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2015

Hardware Availability: Apr-2015

Software Availability: Sep-2014

Base Portability Flags (Continued)

```
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2560 M1, Intel Xeon E5-2650L v3, 1.8 GHz

SPECfp_rate2006 = 659

SPECfp_rate_base2006 = 642

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2015

Hardware Availability: Apr-2015

Software Availability: Sep-2014

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2560 M1, Intel Xeon E5-2650L v3, 1.8 GHz

SPECfp_rate2006 = 659

SPECfp_rate_base2006 = 642

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2015

Hardware Availability: Apr-2015

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2560 M1, Intel Xeon E5-2650L v3, 1.8 GHz

SPECfp_rate2006 = 659

SPECfp_rate_base2006 = 642

CPU2006 license: 19

Test date: Apr-2015

Test sponsor: Fujitsu

Hardware Availability: Apr-2015

Tested by: Fujitsu

Software Availability: Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 19 18:16:42 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 May 2015.