



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 1810

ProLiant DL580 Gen9
(2.20 GHz, Intel Xeon CPU E7-8860 v3)

SPECfp_rate_base2006 = 1770

CPU2006 license: 3


Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

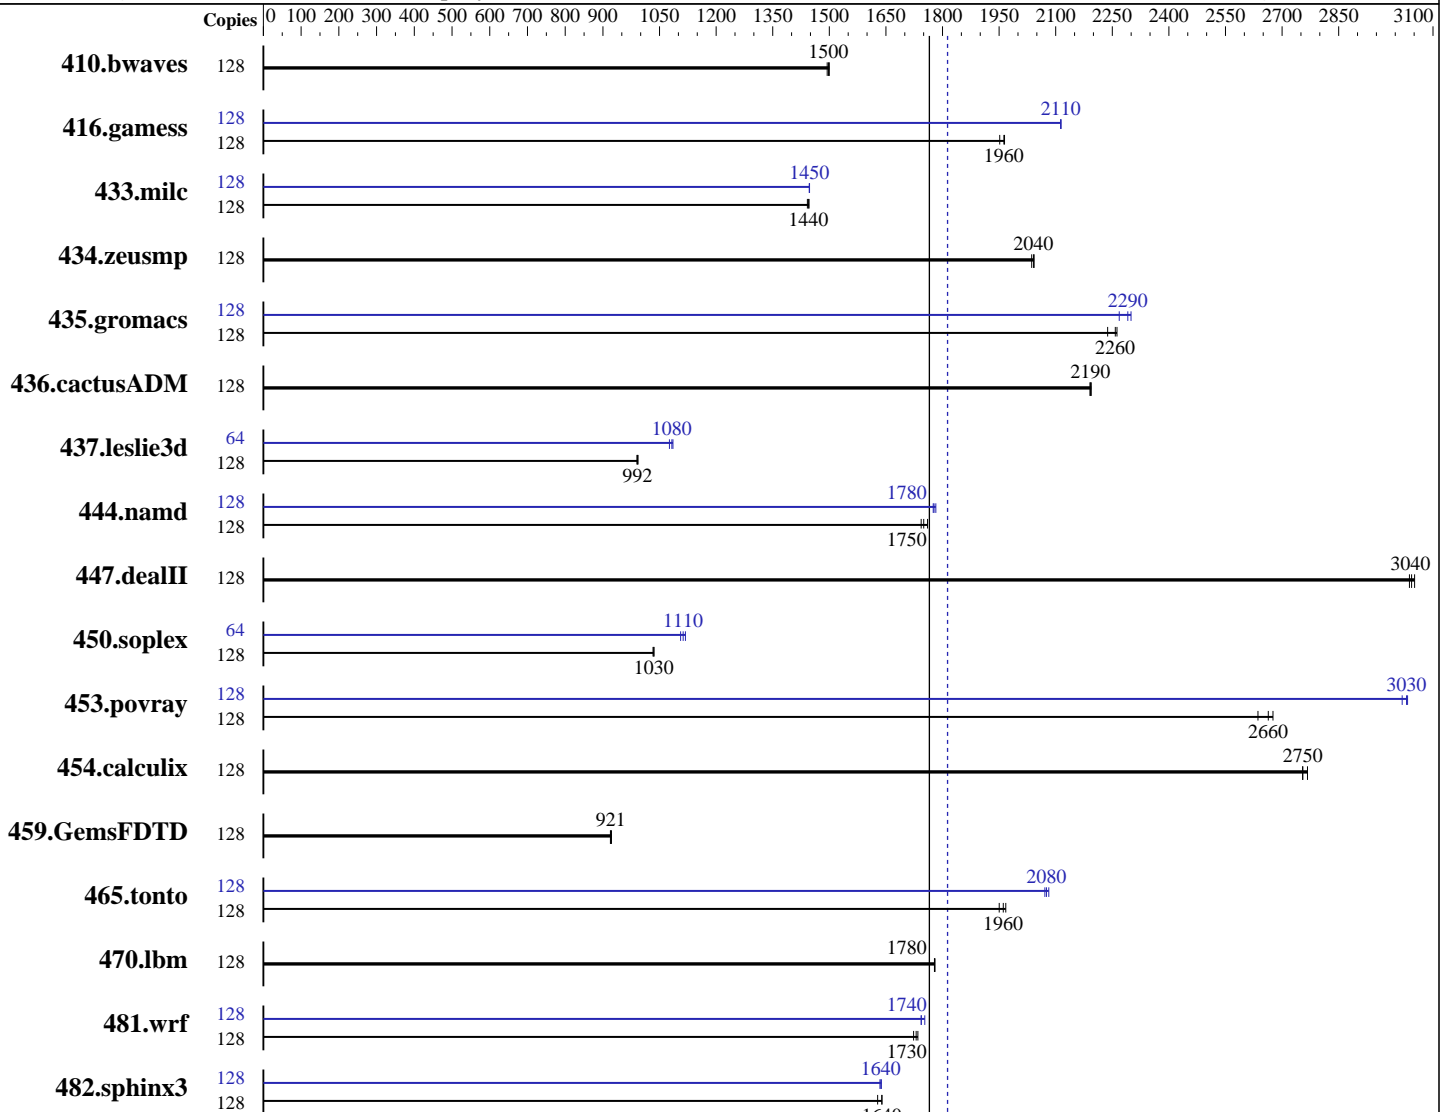

SPECfp_rate_base2006 = 1770

SPECfp_rate2006 = 1810

Hardware

CPU Name: Intel Xeon E7-8860 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64)
 Kernel 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1810

ProLiant DL580 Gen9
(2.20 GHz, Intel Xeon CPU E7-8860 v3)

SPECfp_rate_base2006 = 1770

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

L3 Cache: 40 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 2 x 400 GB SAS SSD, RAID 1
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	1160	1500	1164	1490	<u>1161</u>	<u>1500</u>	128	1160	1500	1164	1490	<u>1161</u>	<u>1500</u>
416.gamess	128	1276	1960	<u>1277</u>	<u>1960</u>	1284	1950	128	<u>1186</u>	<u>2110</u>	1185	2110	1186	2110
433.milc	128	812	1450	815	1440	<u>813</u>	<u>1440</u>	128	<u>812</u>	<u>1450</u>	812	1450	812	1450
434.zeusmp	128	<u>571</u>	<u>2040</u>	572	2040	570	2040	128	<u>571</u>	<u>2040</u>	572	2040	570	2040
435.gromacs	128	404	2260	<u>405</u>	<u>2260</u>	408	2240	128	403	2270	<u>399</u>	<u>2290</u>	397	2300
436.cactusADM	128	698	2190	697	2190	<u>698</u>	<u>2190</u>	128	698	2190	697	2190	<u>698</u>	<u>2190</u>
437.leslie3d	128	<u>1213</u>	<u>992</u>	1212	993	1215	990	64	554	1090	<u>556</u>	<u>1080</u>	559	1080
444.namd	128	583	1760	<u>587</u>	<u>1750</u>	589	1740	128	<u>578</u>	<u>1780</u>	576	1780	578	1780
447.dealII	128	<u>481</u>	<u>3040</u>	482	3040	480	3050	128	<u>481</u>	<u>3040</u>	482	3040	480	3050
450.soplex	128	<u>1032</u>	<u>1030</u>	1031	1040	1034	1030	64	477	1120	483	1110	<u>480</u>	<u>1110</u>
453.povray	128	<u>256</u>	<u>2660</u>	258	2640	254	2680	128	225	3030	<u>225</u>	<u>3030</u>	226	3020
454.calculix	128	<u>383</u>	<u>2750</u>	382	2770	383	2750	128	<u>383</u>	<u>2750</u>	382	2770	383	2750
459.GemsFDTD	128	1476	920	<u>1475</u>	<u>921</u>	1472	923	128	1476	920	<u>1475</u>	<u>921</u>	1472	923
465.tonto	128	646	1950	<u>642</u>	<u>1960</u>	640	1970	128	<u>607</u>	<u>2080</u>	605	2080	608	2070
470.lbm	128	989	1780	988	1780	<u>989</u>	<u>1780</u>	128	989	1780	988	1780	<u>989</u>	<u>1780</u>
481.wrf	128	<u>826</u>	<u>1730</u>	830	1720	824	1730	128	820	1740	816	1750	<u>820</u>	<u>1740</u>
482.sphinx3	128	<u>1522</u>	<u>1640</u>	1522	1640	1532	1630	128	<u>1524</u>	<u>1640</u>	1523	1640	1527	1630

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1810

ProLiant DL580 Gen9
(2.20 GHz, Intel Xeon CPU E7-8860 v3)

SPECfp_rate_base2006 = 1770

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Platform Notes

BIOS Configuration

Power Profile set to Custom
Power Regulator set to Static High Performance Mode
Minimum Processor Idle Power Core C-State set to C6 State
Minimum Processor Idle Power Package C-State set to No Package State
Energy/Performance Bias set to Maximum Performance
Collaborative Power Control set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh

Sysinfo program /home/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on dl580gen9jks Fri May 22 07:19:23 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E7-8860 v3 @ 2.20GHz
 4 "physical id"s (chips)
 128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 16
  siblings  : 32
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 40960 KB
```

From /proc/meminfo

```
MemTotal:      529311464 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1810

ProLiant DL580 Gen9
(2.20 GHz, Intel Xeon CPU E7-8860 v3)

SPECfp_rate_base2006 = 1770

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Platform Notes (Continued)

```
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux dl580gen9jks 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 21 18:19
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   331G  5.4G  325G   2% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HP U17 03/13/2015
Memory:
32x HP 752369-081 16 GB 2 rank 2133 MHz, configured at 1600 MHz
64x UNKNOWN NOT AVAILABLE
```

(End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:
32x HP 752369-081 16 GB 2 rank 2133 MHz, configured at 1600 MHz

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1810

ProLiant DL580 Gen9
(2.20 GHz, Intel Xeon CPU E7-8860 v3)

SPECfp_rate_base2006 = 1770

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1810

ProLiant DL580 Gen9
(2.20 GHz, Intel Xeon CPU E7-8860 v3)

SPECfp_rate_base2006 = 1770

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
 -unroll2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1810

ProLiant DL580 Gen9
(2.20 GHz, Intel Xeon CPU E7-8860 v3)

SPECfp_rate_base2006 = 1770

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 Gen9
(2.20 GHz, Intel Xeon CPU E7-8860 v3)

SPECfp_rate2006 = 1810

SPECfp_rate_base2006 = 1770

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jun 17 10:49:52 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 June 2015.