



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 964

ProLiant BL660c Gen9
(1.70 GHz, Intel Xeon E5-4610 v3)

SPECfp_rate_base2006 = 942

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: May-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

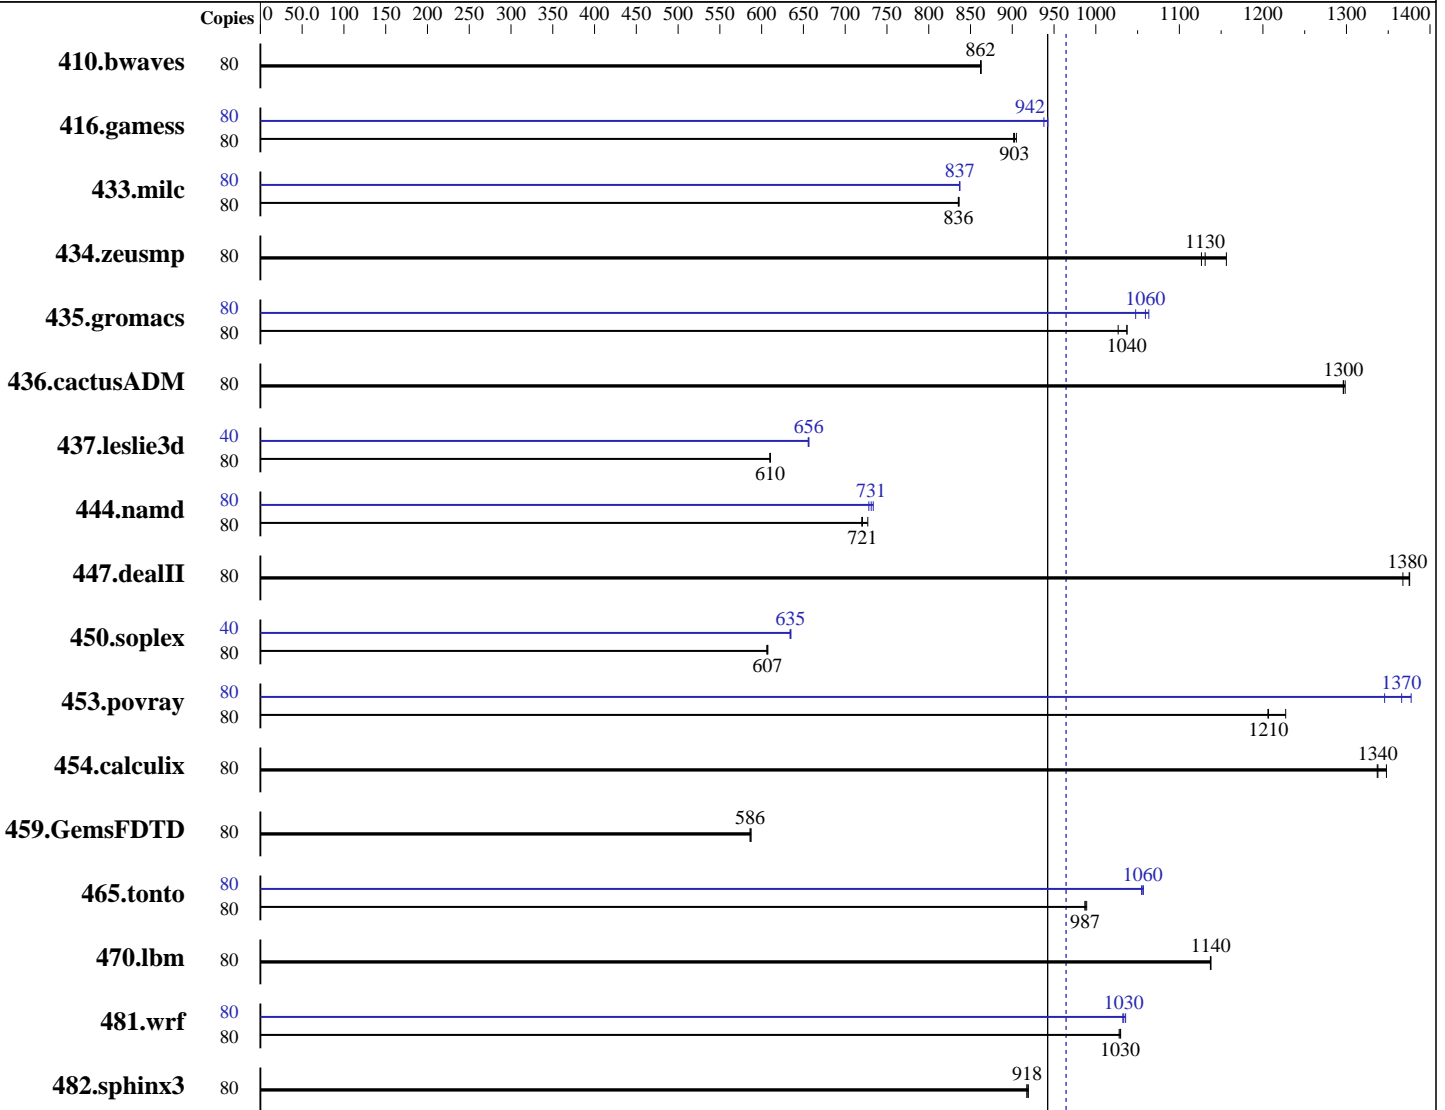

SPECfp_rate_base2006 = 942

SPECfp_rate2006 = 964

Hardware

CPU Name: Intel Xeon E5-4610 v3
 CPU Characteristics:
 CPU MHz: 1700
 FPU: Integrated
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64)
 Kernel 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 964

ProLiant BL660c Gen9
(1.70 GHz, Intel Xeon E5-4610 v3)

SPECfp_rate_base2006 = 942

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	<u>1261</u>	<u>862</u>	1261	862	1260	863	80	<u>1261</u>	<u>862</u>	1261	862	1260	863
416.gamess	80	1731	905	1737	902	<u>1735</u>	<u>903</u>	80	1670	938	<u>1662</u>	<u>942</u>	1662	942
433.milc	80	878	836	879	835	<u>879</u>	<u>836</u>	80	877	837	878	837	<u>877</u>	<u>837</u>
434.zeusmp	80	<u>644</u>	<u>1130</u>	630	1160	646	1130	80	<u>644</u>	<u>1130</u>	630	1160	646	1130
435.gromacs	80	556	1030	<u>551</u>	<u>1040</u>	551	1040	80	545	1050	<u>539</u>	<u>1060</u>	537	1060
436.cactusADM	80	<u>737</u>	<u>1300</u>	736	1300	738	1300	80	<u>737</u>	<u>1300</u>	736	1300	738	1300
437.leslie3d	80	1232	610	1233	610	<u>1232</u>	<u>610</u>	40	573	656	573	656	<u>573</u>	<u>656</u>
444.namd	80	882	727	<u>890</u>	<u>721</u>	891	720	80	<u>878</u>	<u>731</u>	875	734	881	728
447.dealII	80	<u>666</u>	<u>1380</u>	665	1380	669	1370	80	<u>666</u>	<u>1380</u>	665	1380	669	1370
450.soplex	80	<u>1099</u>	<u>607</u>	1099	607	1101	606	40	525	635	<u>526</u>	<u>635</u>	526	634
453.povray	80	<u>353</u>	<u>1210</u>	347	1230	353	1210	80	309	1380	316	1350	<u>312</u>	<u>1370</u>
454.calculix	80	494	1340	<u>493</u>	<u>1340</u>	490	1350	80	494	1340	<u>493</u>	<u>1340</u>	490	1350
459.GemsFDTD	80	1448	586	<u>1448</u>	<u>586</u>	1445	587	80	1448	586	<u>1448</u>	<u>586</u>	1445	587
465.tonto	80	<u>797</u>	<u>987</u>	798	987	796	989	80	<u>745</u>	<u>1060</u>	745	1060	746	1050
470.lbm	80	<u>966</u>	<u>1140</u>	967	1140	966	1140	80	<u>966</u>	<u>1140</u>	967	1140	966	1140
481.wrf	80	<u>868</u>	<u>1030</u>	868	1030	869	1030	80	866	1030	<u>865</u>	<u>1030</u>	863	1040
482.sphinx3	80	<u>1699</u>	<u>918</u>	1696	919	1699	918	80	<u>1699</u>	<u>918</u>	1696	919	1699	918

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 964

ProLiant BL660c Gen9
(1.70 GHz, Intel Xeon E5-4610 v3)

SPECfp_rate_base2006 = 942

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Platform Notes

BIOS Configuration:

HP Power Profile set to Custom
HP Power Regulator to HP Static High Performance Mode
Minimum Processor Idle Power Core State set to C6 State
Energy/Performance Bias set to Maximum Performance
Collaborative Power Control set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh
Sysinfo program /root/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-mava Sat May 30 00:56:30 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-4610 v3 @ 1.70GHz
 4 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
physical 2: cores 0 1 2 3 4 8 9 10 11 12
physical 3: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

From /proc/meminfo

```
MemTotal: 529305880 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 964

ProLiant BL660c Gen9
(1.70 GHz, Intel Xeon E5-4610 v3)

SPECfp_rate_base2006 = 942

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Platform Notes (Continued)

CPE_NAME="cpe:/o:suse:sles:12"

uname -a:

```
Linux linux-mava 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014  
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 30 00:46

SPEC is set to: /root/cpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda3       xfs   341G  8.7G  332G   3% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP I38 03/05/2015

Memory:

```
4x HP 752369-081 16 GB 2 rank 2133 MHz, configured at 1600 MHz  
28x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1600 MHz
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006/libs/32:/root/cpu2006/libs/64:/root/cpu2006/sh"
```

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.1

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 964

ProLiant BL660c Gen9
(1.70 GHz, Intel Xeon E5-4610 v3)

SPECfp_rate_base2006 = 942

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 964

ProLiant BL660c Gen9
(1.70 GHz, Intel Xeon E5-4610 v3)

SPECfp_rate_base2006 = 942

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.lelie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 964

ProLiant BL660c Gen9
(1.70 GHz, Intel Xeon E5-4610 v3)

SPECfp_rate_base2006 = 942

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Peak Optimization Flags (Continued)

447.dealIII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL660c Gen9
(1.70 GHz, Intel Xeon E5-4610 v3)

SPECfp_rate2006 = 964

SPECfp_rate_base2006 = 942

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 30 16:17:01 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 June 2015.