



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECint®\_rate2006 = 985

Inspur NF5280M4 (Intel Xeon E5-2687W v3)

SPECint\_rate\_base2006 = 951

CPU2006 license: 3358


Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

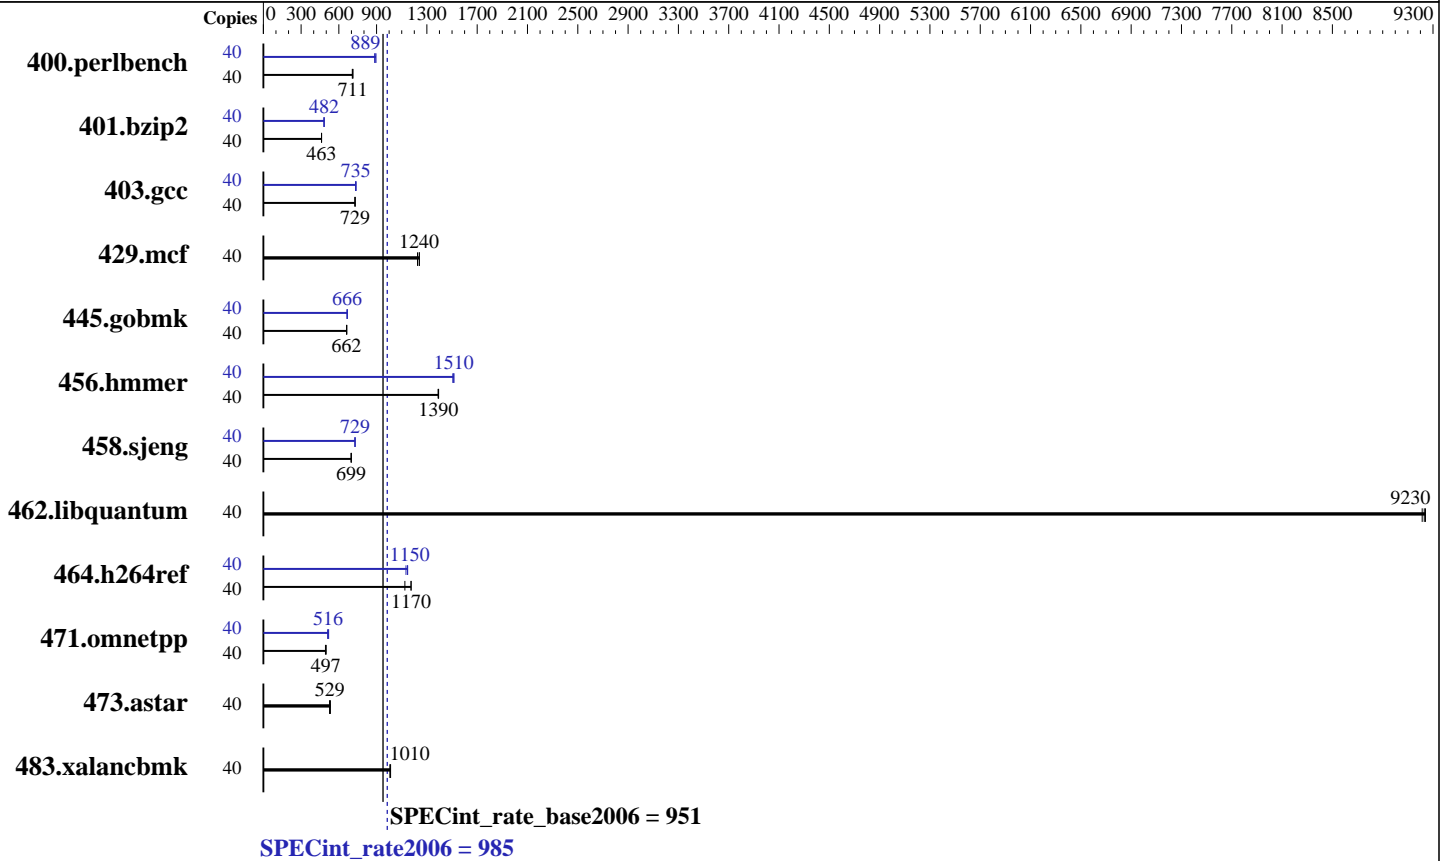

### Hardware

CPU Name: Intel Xeon E5-2687W v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 3100  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 450 GB SATA SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 5  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECint\_rate2006 = 985

Inspur NF5280M4 (Intel Xeon E5-2687W v3)

SPECint\_rate\_base2006 = 951

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	549	711	553	707	<u>550</u>	<u>711</u>	40	442	885	<u>440</u>	<u>889</u>	436	895
401.bzip2	40	835	462	<u>834</u>	<u>463</u>	834	463	40	<u>800</u>	<u>482</u>	799	483	800	482
403.gcc	40	<u>442</u>	<u>729</u>	442	728	441	730	40	440	733	437	737	<u>438</u>	<u>735</u>
429.mcf	40	294	1240	298	1230	<u>294</u>	<u>1240</u>	40	294	1240	298	1230	<u>294</u>	<u>1240</u>
445.gobmk	40	633	663	<u>634</u>	<u>662</u>	634	662	40	629	667	<u>630</u>	<u>666</u>	630	666
456.hammer	40	268	1390	<u>268</u>	<u>1390</u>	269	1390	40	246	1510	<u>247</u>	<u>1510</u>	248	1510
458.sjeng	40	<u>693</u>	<u>699</u>	693	698	693	699	40	664	729	<u>664</u>	<u>729</u>	665	728
462.libquantum	40	<u>89.8</u>	<u>9230</u>	89.7	9240	90.0	9210	40	<u>89.8</u>	<u>9230</u>	89.7	9240	90.0	9210
464.h264ref	40	<u>754</u>	<u>1170</u>	787	1130	754	1170	40	772	1150	<u>772</u>	<u>1150</u>	781	1130
471.omnetpp	40	<u>503</u>	<u>497</u>	501	499	506	494	40	<u>485</u>	<u>516</u>	482	519	489	511
473.astar	40	<u>531</u>	<u>529</u>	527	533	534	526	40	<u>531</u>	<u>529</u>	527	533	534	526
483.xalancbmk	40	<u>274</u>	<u>1010</u>	274	1010	273	1010	40	<u>274</u>	<u>1010</u>	274	1010	273	1010

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS and OS configuration:  
SCALING\_GOVERNOR set to Performance  
Hardware Prefetch set to Disable  
Memory Frequency set to 2133 MHz  
VT Support set to Disable  
C1E Support set to Disable  
Sysinfo program /home/CPU2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Sat Jul 11 12:39:06 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2687W v3 @ 3.10GHz  
2 "physical id"s (chips)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 985

Inspur NF5280M4 (Intel Xeon E5-2687W v3)

SPECint\_rate\_base2006 = 951

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

## Platform Notes (Continued)

40 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 10
siblings  : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 12800 KB
```

From /proc/meminfo

```
MemTotal:      264037908 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 5 Jul 10 14:27

SPEC is set to: /home/CPU2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   393G  68G  325G  18% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 4.0.1 10/30/2014

Memory:

```
8x NO DIMM NO DIMM
16x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 985

Inspur NF5280M4 (Intel Xeon E5-2687W v3)

SPECint\_rate\_base2006 = 951

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/CPU2006/libs/32:/home/CPU2006/libs/64:/home/CPU2006/sh"
```

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

```
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

```
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 985

Inspur NF5280M4 (Intel Xeon E5-2687W v3)

SPECint\_rate\_base2006 = 951

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 985

Inspur NF5280M4 (Intel Xeon E5-2687W v3)

SPECint\_rate\_base2006 = 951

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jul 29 12:09:21 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 July 2015.