



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp®_rate2006 = 1390

Huawei CH242 V3 (Intel Xeon E7-4830 v3)

SPECfp_rate_base2006 = 1360

CPU2006 license: 3175


Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

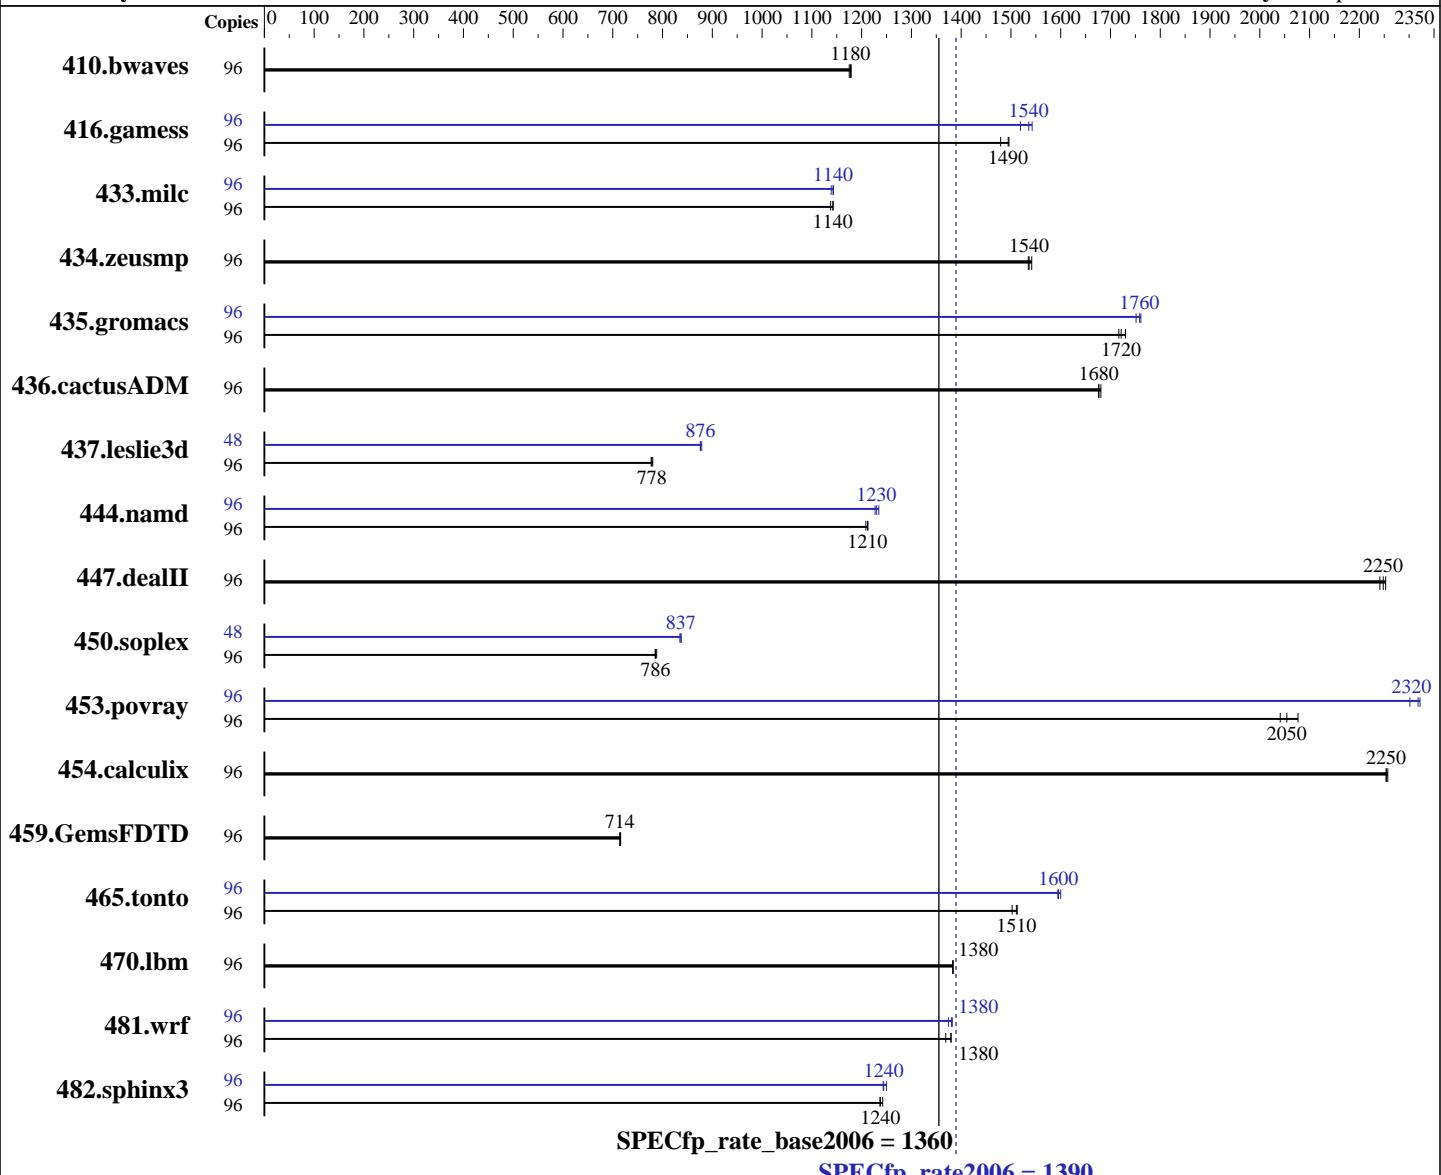

Hardware

CPU Name: Intel Xeon E7-4830 v3
CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
CPU MHz: 2100
FPU: Integrated
CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable: 2,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
Compiler: 3.10.0-123.el7.x86_64
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1390

Huawei CH242 V3 (Intel Xeon E7-4830 v3)

SPECfp_rate_base2006 = 1360

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	96	1110	1180	<u>1108</u>	<u>1180</u>	1107	1180	96	1110	1180	<u>1108</u>	<u>1180</u>	1107	1180		
416.gamess	96	1271	1480	1256	1500	<u>1258</u>	<u>1490</u>	96	<u>1224</u>	<u>1540</u>	1237	1520	1219	1540		
433.milc	96	771	1140	<u>771</u>	<u>1140</u>	775	1140	96	771	1140	774	1140	<u>771</u>	<u>1140</u>		
434.zeusmp	96	567	1540	<u>569</u>	<u>1540</u>	569	1530	96	567	1540	<u>569</u>	<u>1540</u>	569	1530		
435.gromacs	96	396	1730	<u>398</u>	<u>1720</u>	399	1720	96	389	1760	<u>390</u>	<u>1760</u>	391	1750		
436.cactusADM	96	683	1680	685	1680	<u>684</u>	<u>1680</u>	96	683	1680	685	1680	<u>684</u>	<u>1680</u>		
437.leslie3d	96	<u>1159</u>	<u>778</u>	1161	777	1156	780	48	513	879	<u>515</u>	<u>876</u>	515	876		
444.namd	96	635	1210	637	1210	<u>635</u>	<u>1210</u>	96	624	1230	627	1230	<u>626</u>	<u>1230</u>		
447.dealII	96	<u>489</u>	<u>2250</u>	487	2250	490	2240	96	<u>489</u>	<u>2250</u>	487	2250	490	2240		
450.soplex	96	1016	788	<u>1019</u>	<u>786</u>	1020	785	48	479	835	<u>478</u>	<u>837</u>	478	837		
453.povray	96	246	2080	<u>249</u>	<u>2050</u>	250	2040	96	222	2300	220	2320	<u>220</u>	<u>2320</u>		
454.calculix	96	351	2250	<u>351</u>	<u>2250</u>	351	2260	96	351	2250	<u>351</u>	<u>2250</u>	351	2260		
459.GemsFDTD	96	1426	714	<u>1426</u>	<u>714</u>	1423	716	96	1426	714	<u>1426</u>	<u>714</u>	1423	716		
465.tonto	96	629	1500	624	1510	<u>625</u>	<u>1510</u>	96	<u>592</u>	<u>1600</u>	593	1590	590	1600		
470.lbm	96	954	1380	953	1380	<u>954</u>	<u>1380</u>	96	954	1380	953	1380	<u>954</u>	<u>1380</u>		
481.wrf	96	777	1380	<u>777</u>	<u>1380</u>	783	1370	96	776	1380	<u>777</u>	<u>1380</u>	780	1370		
482.sphinx3	96	1513	1240	<u>1512</u>	<u>1240</u>	1506	1240	96	1497	1250	1505	1240	<u>1504</u>	<u>1240</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Set Lock_step to disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1390

Huawei CH242 V3 (Intel Xeon E7-4830 v3)

SPECfp_rate_base2006 = 1360

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

Platform Notes (Continued)

Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Tue Jul 21 21:16:21 2015

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-4830 v3 @ 2.10GHz
        4 "physical id"s (chips)
        96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 12
siblings : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      528018452 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 21 07:04
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   440G  260G  180G  60% /
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei CH242 V3 (Intel Xeon E7-4830 v3)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECfp_rate2006 = 1390

SPECfp_rate_base2006 = 1360

Test date: Jul-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISZ015 06/09/2015

Memory:

32x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1333 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei CH242 V3 (Intel Xeon E7-4830 v3)

SPECfp_rate2006 = 1390

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

Base Portability Flags (Continued)

```
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei CH242 V3 (Intel Xeon E7-4830 v3)

SPECfp_rate2006 = 1390

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
  -auto-ilp32
```

470.lbm: basepeak = yes

```
482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
  -unroll2
```

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
  -auto-ilp32
```

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1390

Huawei CH242 V3 (Intel Xeon E7-4830 v3)

SPECfp_rate_base2006 = 1360

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1390

Huawei CH242 V3 (Intel Xeon E7-4830 v3)

SPECfp_rate_base2006 = 1360

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Aug 12 11:07:41 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 August 2015.