



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 221

PowerEdge R230 (Intel Xeon E3-1260L v5, 2.90 GHz)

SPECint_rate_base2006 = 214

CPU2006 license: 55


Test date: Oct-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

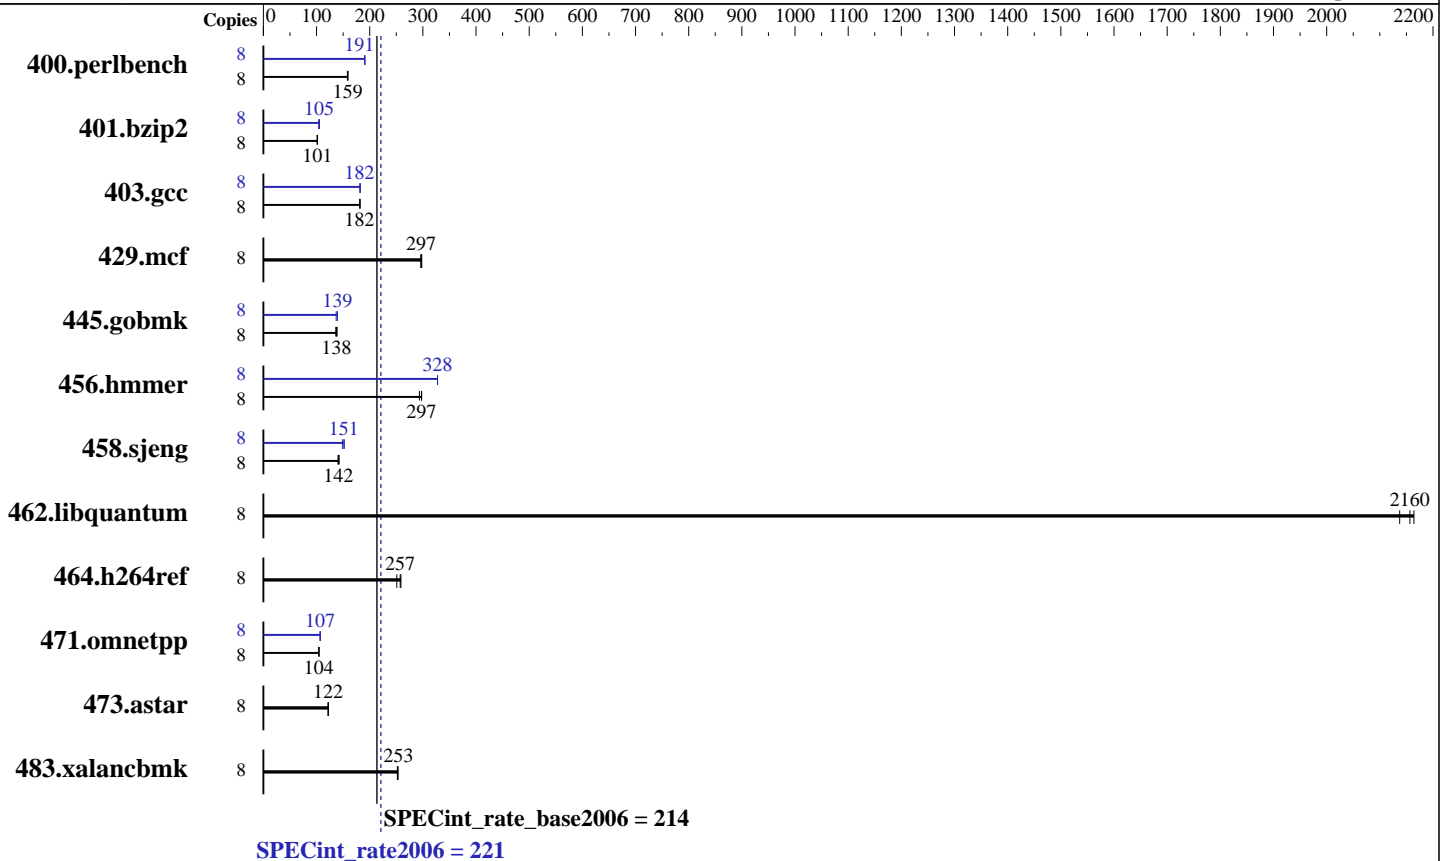

Hardware

CPU Name: Intel Xeon E3-1260L v5
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-U)
 Disk Subsystem: 1 x 500 GB 7200 RPM SATA
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12
 3.12.28-4-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 221

PowerEdge R230 (Intel Xeon E3-1260L v5, 2.90 GHz)

SPECint_rate_base2006 = 214

CPU2006 license: 55

Test date: Oct-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	492	159	495	158	492	159	8	409	191	410	191	411	190
401.bzip2	8	764	101	761	101	758	102	8	732	106	741	104	737	105
403.gcc	8	355	182	355	181	354	182	8	353	182	355	182	354	182
429.mcf	8	245	298	246	296	246	297	8	245	298	246	296	246	297
445.gobmk	8	610	138	616	136	605	139	8	603	139	613	137	603	139
456.hammer	8	251	298	254	293	251	297	8	228	328	228	328	228	328
458.sjeng	8	680	142	690	140	684	142	8	651	149	639	151	636	152
462.libquantum	8	76.9	2160	77.6	2140	76.6	2160	8	76.9	2160	77.6	2140	76.6	2160
464.h264ref	8	684	259	705	251	688	257	8	684	259	705	251	688	257
471.omnetpp	8	478	105	478	104	479	104	8	468	107	467	107	469	107
473.astar	8	461	122	460	122	461	122	8	461	122	460	122	461	122
483.xalancbmk	8	219	252	218	253	218	253	8	219	252	218	253	218	253

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Virtualization Technology disabled
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1
running on linux-8px2 Fri Oct 2 09:56:45 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1260L v5 @ 2.90GHz
1 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 221

PowerEdge R230 (Intel Xeon E3-1260L v5, 2.90 GHz)

SPECint_rate_base2006 = 214

CPU2006 license: 55

Test date: Oct-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Platform Notes (Continued)

```
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
  cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      66066084 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 0
  # This file is deprecated and will be removed in a future service pack or
  # release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12"
  VERSION_ID="12"
  PRETTY_NAME="SUSE Linux Enterprise Server 12"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-8px2 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 2 09:55

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  451G  8.4G  442G   2% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.3.16 09/09/2015

```
Memory:
1x 00AD00000000 HMA82GU7MFR8N-TF 16 GB 2 rank 2133 MHz
2x 00AD0000020B HMA82GU7MFR8N-TF 16 GB 2 rank 2133 MHz
1x 00AD00000800 HMA82GU7MFR8N-TF 16 GB 2 rank 2133 MHz
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 221

PowerEdge R230 (Intel Xeon E3-1260L v5, 2.90 GHz)

SPECint_rate_base2006 = 214

CPU2006 license: 55

Test date: Oct-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 221

PowerEdge R230 (Intel Xeon E3-1260L v5, 2.90 GHz)

SPECint_rate_base2006 = 214

CPU2006 license: 55

Test date: Oct-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmarthearp

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

464.h264ref: -D_FILE_OFFSET_BITS=64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -D_FILE_OFFSET_BITS=64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 221

PowerEdge R230 (Intel Xeon E3-1260L v5, 2.90 GHz)

SPECint_rate_base2006 = 214

CPU2006 license: 55

Test date: Oct-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
 -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
 -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
 -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 221

PowerEdge R230 (Intel Xeon E3-1260L v5, 2.90 GHz)

SPECint_rate_base2006 = 214

CPU2006 license: 55

Test date: Oct-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 17 19:16:11 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 November 2015.