



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECint®2006 = 54.5

PRIMERGY TX1320 M2, Intel Pentium G4400, 3.30 GHz

SPECint_base2006 = 52.8

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2015

Hardware Availability: Feb-2016

Software Availability: Sep-2015

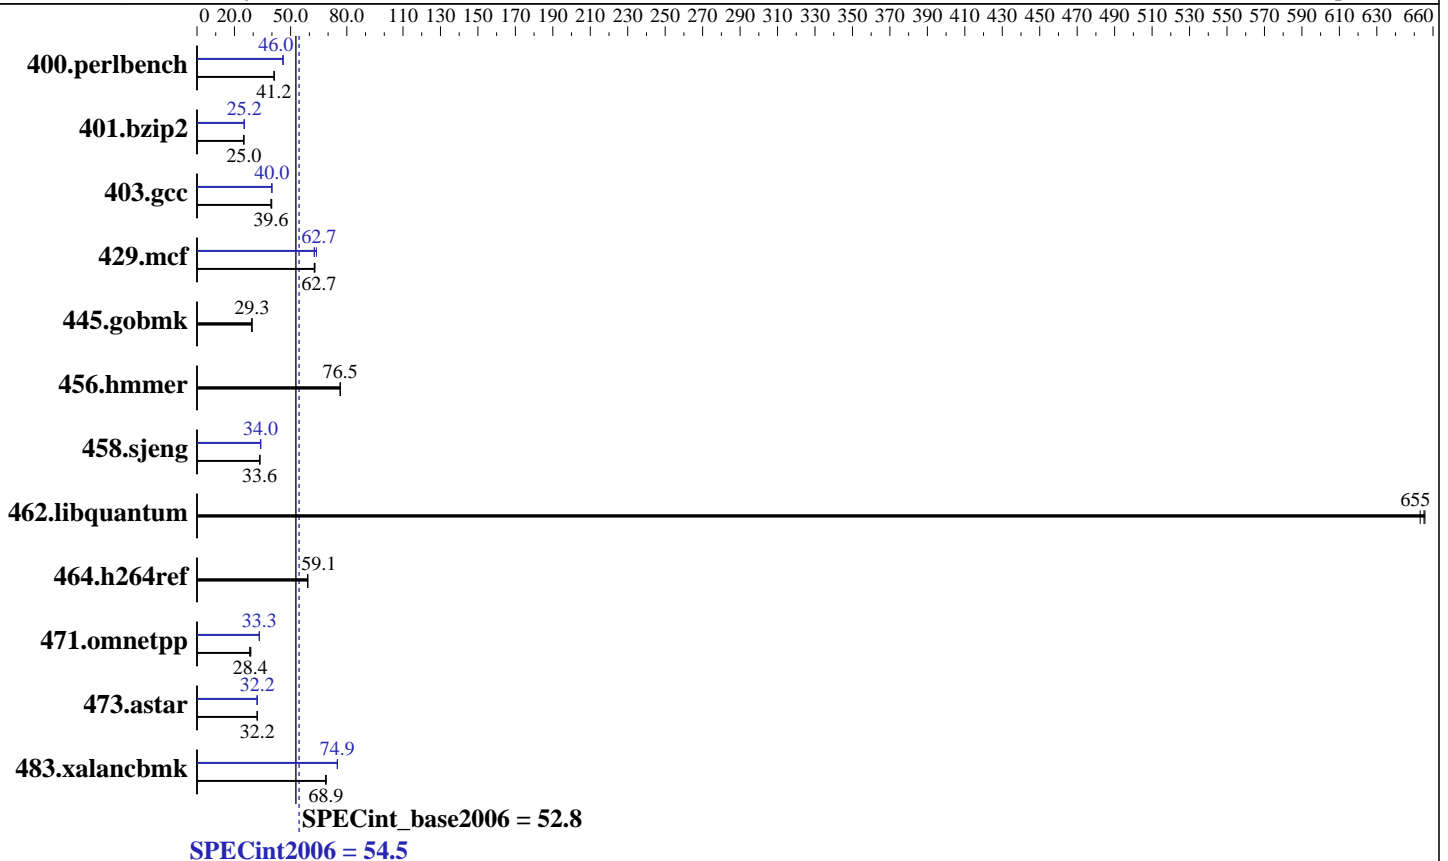

Hardware

CPU Name: Intel Pentium G4400
 CPU Characteristics:
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-E)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64)
 Kernel 3.12.48-52.27-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 54.5

PRIMERGY TX1320 M2, Intel Pentium G4400, 3.30 GHz

SPECint_base2006 = 52.8

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Dec-2015
Hardware Availability: Feb-2016
Software Availability: Sep-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	237	41.3	238	41.1	<u>237</u>	<u>41.2</u>	213	45.9	213	46.0	<u>213</u>	<u>46.0</u>
401.bzip2	387	24.9	<u>386</u>	<u>25.0</u>	385	25.1	383	25.2	<u>383</u>	<u>25.2</u>	381	25.3
403.gcc	202	39.9	<u>203</u>	<u>39.6</u>	204	39.6	201	40.0	<u>201</u>	<u>40.0</u>	202	39.9
429.mcf	146	62.6	<u>145</u>	<u>62.7</u>	145	63.0	143	63.8	<u>146</u>	<u>62.7</u>	146	62.6
445.gobmk	358	29.3	<u>358</u>	<u>29.3</u>	357	29.4	358	29.3	<u>358</u>	<u>29.3</u>	357	29.4
456.hammer	122	76.6	122	76.5	<u>122</u>	<u>76.5</u>	122	76.6	122	76.5	<u>122</u>	<u>76.5</u>
458.sjeng	<u>361</u>	<u>33.6</u>	361	33.6	361	33.5	<u>356</u>	<u>34.0</u>	356	34.0	356	34.0
462.libquantum	31.7	653	31.6	656	<u>31.6</u>	<u>655</u>	31.7	653	31.6	656	<u>31.6</u>	<u>655</u>
464.h264ref	374	59.1	<u>374</u>	<u>59.1</u>	374	59.1	374	59.1	<u>374</u>	<u>59.1</u>	374	59.1
471.omnetpp	<u>220</u>	<u>28.4</u>	222	28.1	217	28.8	<u>188</u>	<u>33.3</u>	188	33.3	187	33.3
473.astar	219	32.0	<u>218</u>	<u>32.2</u>	217	32.3	219	32.1	218	32.2	<u>218</u>	<u>32.2</u>
483.xalancbmk	100	69.0	100	68.7	<u>100</u>	<u>68.9</u>	92.1	74.9	<u>92.1</u>	<u>74.9</u>	92.0	75.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Sysinfo program /home/SPECcpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on TX1320M2 Mon Dec 14 11:04:08 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Pentium(R) CPU G4400 @ 3.30GHz
1 "physical id"s (chips)
2 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 2
siblings : 2
physical 0: cores 0 1

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 54.5

PRIMERGY TX1320 M2, Intel Pentium G4400, 3.30 GHz

SPECint_base2006 = 52.8

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2015

Hardware Availability: Feb-2016

Software Availability: Sep-2015

Platform Notes (Continued)

cache size : 3072 KB

From /proc/meminfo

```
MemTotal:      65906892 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 0

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12"

VERSION_ID="12"

PRETTY_NAME="SUSE Linux Enterprise Server 12"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12"

uname -a:

```
Linux TX1320M2 3.12.48-52.27-default #1 SMP Mon Oct 5 10:08:10 UTC 2015
(314f0e3) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 5 Dec 14 11:00

SPEC is set to: /home/SPECcpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   1.6T   15G  1.6T   1% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.1.0 for D3373-Alx 10/30/2015

Memory:

4x SK Hynix HMA82GU7MFR8N-TF 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 54.5

PRIMERGY TX1320 M2, Intel Pentium G4400, 3.30 GHz

SPECint_base2006 = 52.8

CPU2006 license: 19

Test date: Dec-2015

Test sponsor: Fujitsu

Hardware Availability: Feb-2016

Tested by: Fujitsu

Software Availability: Sep-2015

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

OMP_NUM_THREADS = "2"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 54.5

PRIMERGY TX1320 M2, Intel Pentium G4400, 3.30 GHz

SPECint_base2006 = 52.8

CPU2006 license: 19

Test date: Dec-2015

Test sponsor: Fujitsu

Hardware Availability: Feb-2016

Tested by: Fujitsu

Software Availability: Sep-2015

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1)
-prof-use(pass 2) -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -par-num-threads=1(pass 1)
-prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 54.5

PRIMERGY TX1320 M2, Intel Pentium G4400, 3.30 GHz

SPECint_base2006 = 52.8

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2015

Hardware Availability: Feb-2016

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-alloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-auto-p32

445.gobmk: basepeak = yes

456.hmmer: basepeak = yes

458.sjeng: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1)
-prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1)
-prof-use(pass 2) -opt-ra-region-strategy=block
-ansi-alias -Wl,-z,muldefs -L/sh -lsmarheap

473.astar: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmarheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/sh -lsmarheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 54.5

PRIMERGY TX1320 M2, Intel Pentium G4400, 3.30 GHz

SPECint_base2006 = 52.8

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2015

Hardware Availability: Feb-2016

Software Availability: Sep-2015

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 30 19:58:59 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 December 2015.