



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSL-nF motherboard
(X11SSL-nF , Intel Xeon E3-1220 v5)

SPECint®_rate2006 = 198

SPECint_rate_base2006 = 193

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Mar-2015

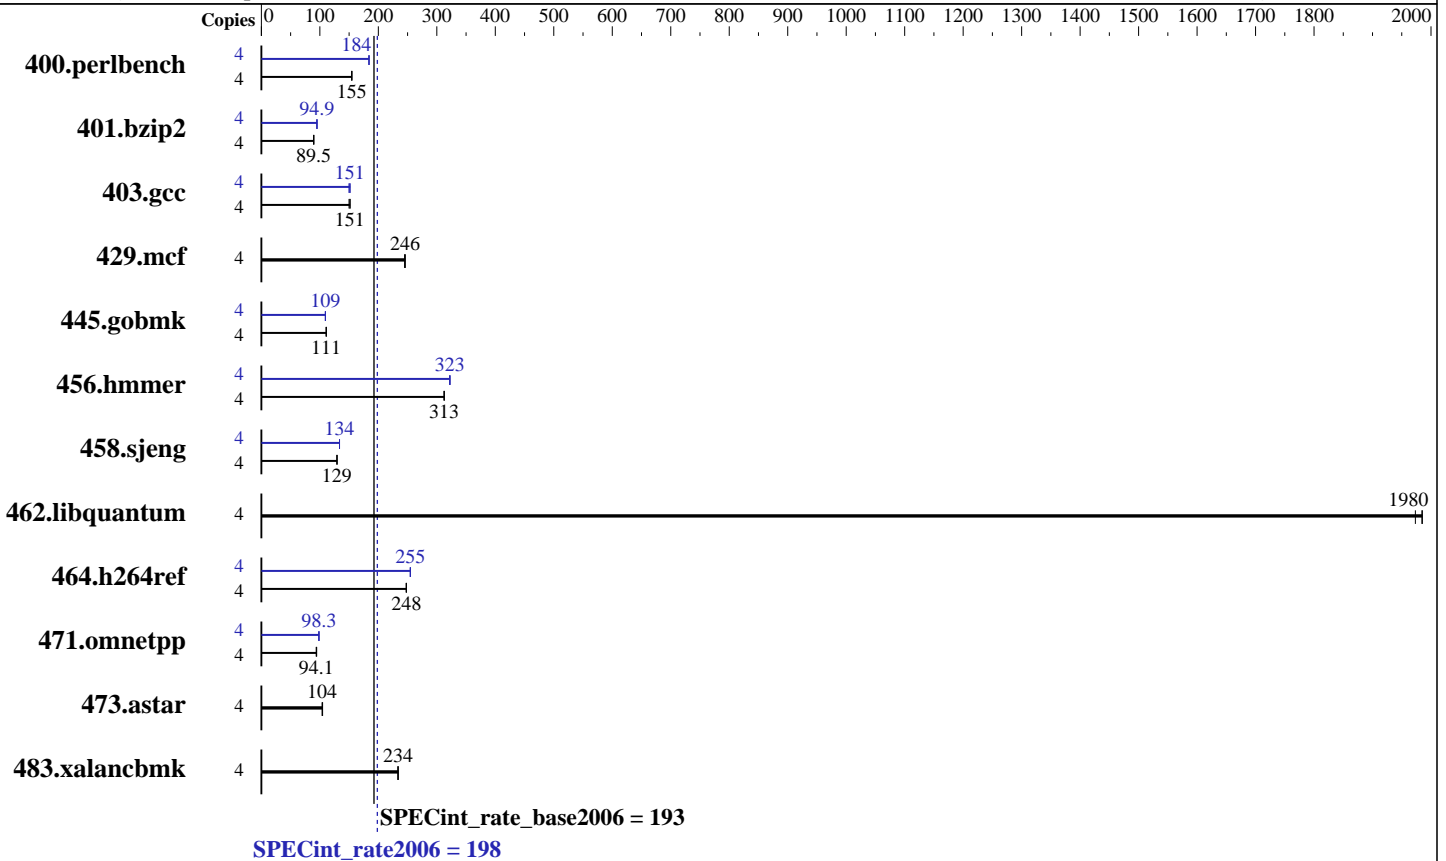

Hardware

CPU Name: Intel Xeon E3-1220 v5
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-E)
 Disk Subsystem: 1 x 1000 GB SATA III, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSL-nF motherboard
(X11SSL-nF , Intel Xeon E3-1220 v5)

SPECint_rate2006 = 198

SPECint_rate_base2006 = 193

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jan-2016
Hardware Availability: Oct-2015
Software Availability: Mar-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	252	155	253	154	<u>253</u>	<u>155</u>	4	212	184	<u>212</u>	<u>184</u>	212	184
401.bzip2	4	430	89.7	<u>431</u>	<u>89.5</u>	432	89.4	4	405	95.3	407	94.9	<u>407</u>	<u>94.9</u>
403.gcc	4	212	152	215	150	<u>213</u>	<u>151</u>	4	<u>213</u>	<u>151</u>	215	150	212	152
429.mcf	4	<u>148</u>	<u>246</u>	149	245	148	246	4	<u>148</u>	<u>246</u>	149	245	148	246
445.gobmk	4	<u>378</u>	<u>111</u>	379	111	378	111	4	383	110	<u>383</u>	<u>109</u>	383	109
456.hammer	4	119	313	<u>119</u>	<u>313</u>	119	312	4	116	323	116	322	<u>116</u>	<u>323</u>
458.sjeng	4	374	129	<u>374</u>	<u>129</u>	374	129	4	<u>362</u>	<u>134</u>	362	134	362	134
462.libquantum	4	42.0	1970	<u>41.8</u>	<u>1980</u>	41.7	1990	4	42.0	1970	<u>41.8</u>	<u>1980</u>	41.7	1990
464.h264ref	4	357	248	358	248	<u>357</u>	<u>248</u>	4	<u>347</u>	<u>255</u>	348	255	347	255
471.omnetpp	4	266	93.9	264	94.6	<u>266</u>	<u>94.1</u>	4	254	98.3	<u>254</u>	<u>98.3</u>	254	98.6
473.astar	4	<u>270</u>	<u>104</u>	270	104	268	105	4	<u>270</u>	<u>104</u>	270	104	268	105
483.xalancbmk	4	<u>118</u>	<u>234</u>	118	234	118	233	4	<u>118</u>	<u>234</u>	118	234	118	233

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

As tested, the system used a Supermicro CSE-113MFAC2-R606CB chassis. The chassis is configured with 2 PWS-606P-1R redundant power supply, 1 SNK-P0046P heatsink, as well as 4 FAN-0154L4 middle cooling fan.

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Wed Jan 13 08:48:22 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1220 v5 @ 3.00GHz
1 "physical id"s (chips)
4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
Continued on next page
```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 198

Supermicro X11SSL-nF motherboard
(X11SSL-nF , Intel Xeon E3-1220 v5)

SPECint_rate_base2006 = 193

CPU2006 license: 001176

Test date: Jan-2016

Test sponsor: Supermicro

Hardware Availability: Oct-2015

Tested by: Supermicro

Software Availability: Mar-2015

Platform Notes (Continued)

```
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      65631332 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.1 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.1"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 12 23:36

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  865G  170G  696G  20% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 1.0a 12/25/2015
Memory:
  4x Samsung M391A2K43BB1-CPB 16 GB 2 rank 2133 MHz
```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSL-nF motherboard
(X11SSL-nF , Intel Xeon E3-1220 v5)

SPECint_rate2006 = 198

SPECint_rate_base2006 = 193

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Mar-2015

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSL-nF motherboard
(X11SSL-nF , Intel Xeon E3-1220 v5)

SPECint_rate2006 = 198

SPECint_rate_base2006 = 193

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Mar-2015

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSL-nF motherboard
(X11SSL-nF , Intel Xeon E3-1220 v5)

SPECint_rate2006 = 198

SPECint_rate_base2006 = 193

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jan-2016
Hardware Availability: Oct-2015
Software Availability: Mar-2015

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 9 17:20:28 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 February 2016.