



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M2, Intel Xeon E7-4830 v3, 2.10 GHz

SPECint®2006 = 52.6

SPECint_base2006 = 50.3

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2016

Hardware Availability: May-2015

Software Availability: Sep-2015

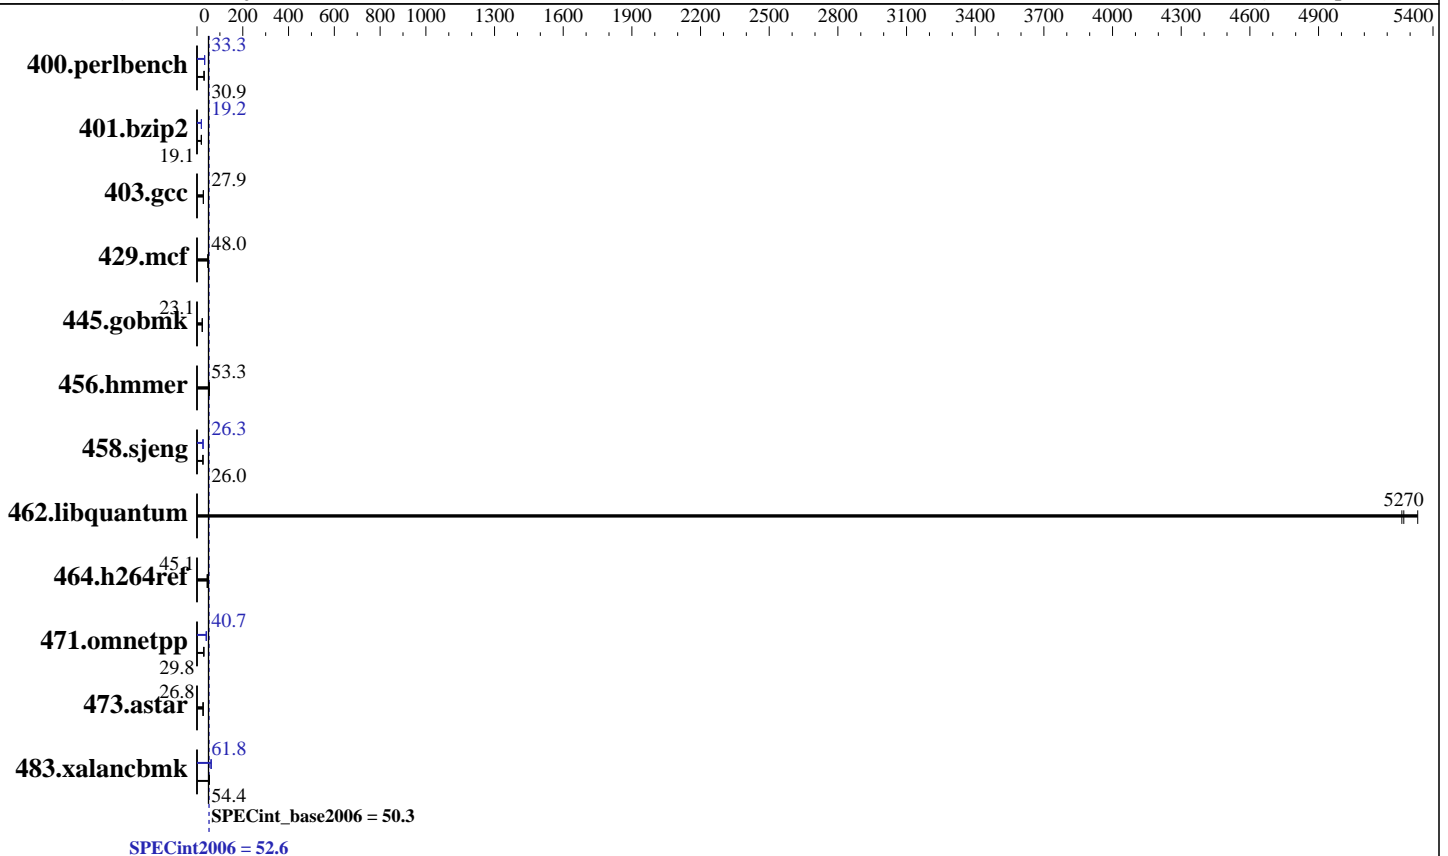

Hardware

CPU Name: Intel Xeon E7-4830 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
 Kernel 3.12.49-11-default
 Compiler: C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M2, Intel Xeon E7-4830 v3, 2.10 GHz

SPECint2006 = **52.6**

SPECint_base2006 = **50.3**

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2016
Hardware Availability: May-2015
Software Availability: Sep-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	317	30.8	316	30.9	315	31.0	293	33.3	293	33.3	293	33.4
401.bzip2	505	19.1	505	19.1	505	19.1	503	19.2	502	19.2	501	19.2
403.gcc	289	27.9	287	28.1	289	27.8	289	27.9	287	28.1	289	27.8
429.mcf	190	47.9	190	48.0	189	48.2	190	47.9	190	48.0	189	48.2
445.gobmk	454	23.1	454	23.1	454	23.1	454	23.1	454	23.1	454	23.1
456.hammer	175	53.3	175	53.3	175	53.3	175	53.3	175	53.3	175	53.3
458.sjeng	466	26.0	466	26.0	465	26.0	459	26.3	460	26.3	459	26.3
462.libquantum	3.94	5260	3.93	5270	3.89	5330	3.94	5260	3.93	5270	3.89	5330
464.h264ref	490	45.2	492	45.0	490	45.1	490	45.2	492	45.0	490	45.1
471.omnetpp	210	29.8	210	29.8	212	29.5	155	40.4	153	40.9	154	40.7
473.astar	262	26.8	262	26.8	264	26.6	262	26.8	262	26.8	264	26.6
483.xalancbmk	128	54.0	126	54.6	127	54.4	112	61.8	112	61.6	112	61.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Energy Performance = Performance
 Utilization Profile = Unbalanced
 CPU C1E Support = Disabled
 Sysinfo program /home/SPECcpu2006/config/sysinfo.rev6914
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
 running on linux-69av Fri Jan 15 15:48:53 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
 model name : Intel(R) Xeon(R) CPU E7-4830 v3 @ 2.10GHz
 4 "physical id"s (chips)
 96 "processors"
 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M2, Intel Xeon E7-4830 v3, 2.10 GHz

SPECint2006 = **52.6**

SPECint_base2006 = **50.3**

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2016
Hardware Availability: May-2015
Software Availability: Sep-2015

Platform Notes (Continued)

```
cpu cores : 12
siblings  : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      1058823588 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-69av 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 15 15:46 last=5
```

```
SPEC is set to: /home/SPECcpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext4  417G   16G  401G   4% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.9 R1.10.0 for D3349-A1x
12/04/2015
Memory:
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M2, Intel Xeon E7-4830 v3, 2.10 GHz

SPECint2006 = 52.6

SPECint_base2006 = 50.3

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2016
Hardware Availability: May-2015
Software Availability: Sep-2015

Platform Notes (Continued)

62x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1333 MHz
2x Hynix HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz, configured at 1333 MHz
32x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"
OMP_NUM_THREADS = "48"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled
For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M2, Intel Xeon E7-4830 v3, 2.10 GHz

SPECint2006 = 52.6

SPECint_base2006 = 50.3

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2016
Hardware Availability: May-2015
Software Availability: Sep-2015

Base Optimization Flags

C benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

C++ benchmarks (except as noted below):

`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

`473.astar: icpc -m64`

Peak Portability Flags

`400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M2, Intel Xeon E7-4830 v3, 2.10 GHz

SPECint2006 = 52.6

SPECint_base2006 = 50.3

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2016
Hardware Availability: May-2015
Software Availability: Sep-2015

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

456.hmmr: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M2, Intel Xeon E7-4830 v3, 2.10 GHz

SPECint2006 = 52.6

SPECint_base2006 = 50.3

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2016

Hardware Availability: May-2015

Software Availability: Sep-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 9 17:20:44 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 February 2016.