



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-i , Intel Xeon E5-2695 v4)

SPECfp®_rate2006 = 1000

SPECfp_rate_base2006 = 976

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

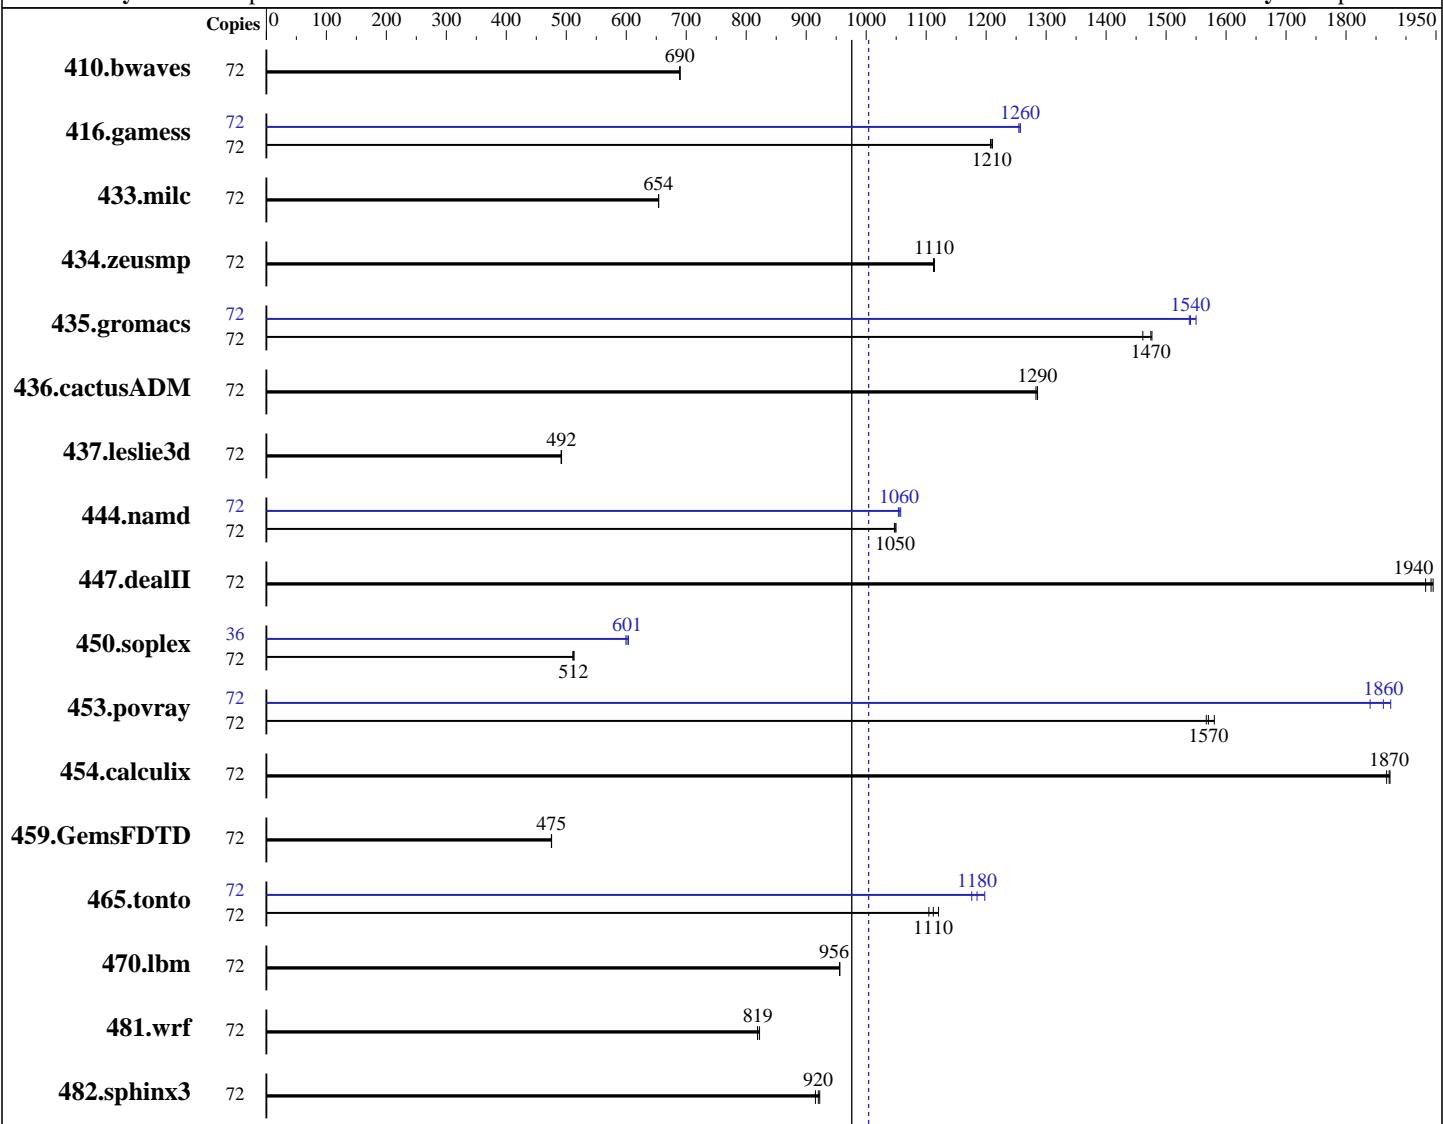

SPECfp_rate_base2006 = 976

SPECfp_rate2006 = 1000

Hardware

CPU Name: Intel Xeon E5-2695 v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz: 2100
FPU: Integrated
CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.2, Kernel 3.10.0-327.el7.x86_64
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-i , Intel Xeon E5-2695 v4)

SPECfp_rate2006 = 1000

SPECfp_rate_base2006 = 976

CPU2006 license: 001176

Test date: Feb-2016

Test sponsor: Supermicro

Hardware Availability: Mar-2016

Tested by: Supermicro

Software Availability: Sep-2015

L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 200 GB SATA III SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	72	1419	690	1419	690	1420	689	72	1419	690	1419	690	1420	689
416.gamess	72	1166	1210	1168	1210	1164	1210	72	1124	1250	1122	1260	1121	1260
433.milc	72	1011	654	1011	654	1011	654	72	1011	654	1011	654	1011	654
434.zeusmp	72	589	1110	589	1110	588	1110	72	589	1110	589	1110	588	1110
435.gromacs	72	348	1480	349	1470	352	1460	72	334	1540	332	1550	334	1540
436.cactusADM	72	669	1290	669	1290	671	1280	72	669	1290	669	1290	671	1280
437.leslie3d	72	1375	492	1375	492	1378	491	72	1375	492	1375	492	1378	491
444.namd	72	550	1050	551	1050	551	1050	72	547	1060	546	1060	548	1050
447.dealII	72	424	1940	426	1930	423	1950	72	424	1940	426	1930	423	1950
450.soplex	72	1171	513	1172	512	1175	511	36	497	604	501	599	499	601
453.povray	72	244	1570	244	1570	242	1580	72	208	1840	204	1870	206	1860
454.calculix	72	317	1870	317	1870	318	1870	72	317	1870	317	1870	318	1870
459.GemsFDTD	72	1607	475	1608	475	1607	475	72	1607	475	1608	475	1607	475
465.tonto	72	637	1110	641	1100	632	1120	72	598	1180	602	1180	592	1200
470.lbm	72	1035	956	1035	956	1035	956	72	1035	956	1035	956	1035	956
481.wrf	72	982	819	982	819	978	822	72	982	819	982	819	978	822
482.sphinx3	72	1521	923	1533	915	1525	920	72	1521	923	1533	915	1525	920

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Early Snoop = Disable
COD Enable = Enable

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-i , Intel Xeon E5-2695 v4)

SPECfp_rate2006 = 1000

SPECfp_rate_base2006 = 976

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

Platform Notes (Continued)

```
Enforce POR = Disabled
Memory Frequency = 2400
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on X10DRW-01 Thu Feb 25 17:12:22 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2695 v4 @ 2.10GHz
        2 "physical id"s (chips)
        72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 18
        siblings : 36
        physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
        physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 23040 KB
```

```
From /proc/meminfo
MemTotal:      264034372 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.2 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.2"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux X10DRW-01 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Feb 25 01:09

SPEC is set to: /usr/cpu2006
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 xfs 183G 5.2G 178G 3% /
Additional information from dmidecode:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-i , Intel Xeon E5-2695 v4)

SPECfp_rate2006 = 1000

SPECfp_rate_base2006 = 976

CPU2006 license: 001176

Test date: Feb-2016

Test sponsor: Supermicro

Hardware Availability: Mar-2016

Tested by: Supermicro

Software Availability: Sep-2015

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0 12/17/2015

Memory:

16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-i , Intel Xeon E5-2695 v4)

SPECfp_rate2006 = 1000

SPECfp_rate_base2006 = 976

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

Base Portability Flags (Continued)

```
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-i , Intel Xeon E5-2695 v4)

SPECfp_rate2006 = 1000

SPECfp_rate_base2006 = 976

CPU2006 license: 001176

Test date: Feb-2016

Test sponsor: Supermicro

Hardware Availability: Mar-2016

Tested by: Supermicro

Software Availability: Sep-2015

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
    450.soplex: -D_FILE_OFFSET_BITS=64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
            -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
            -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
            -prof-use(pass 2) -unroll14 -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-i , Intel Xeon E5-2695 v4)

SPECfp_rate2006 = 1000

SPECfp_rate_base2006 = 976

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-i , Intel Xeon E5-2695 v4)

SPECfp_rate2006 = 1000

SPECfp_rate_base2006 = 976

CPU2006 license: 001176

Test date: Feb-2016

Test sponsor: Supermicro

Hardware Availability: Mar-2016

Tested by: Supermicro

Software Availability: Sep-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jun 30 12:43:35 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 April 2016.