



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant BL460c Gen9  
(2.30 GHz, Intel Xeon E5-2697 v4)

**SPECint®2006 = 70.4**

**SPECint\_base2006 = 68.3**

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

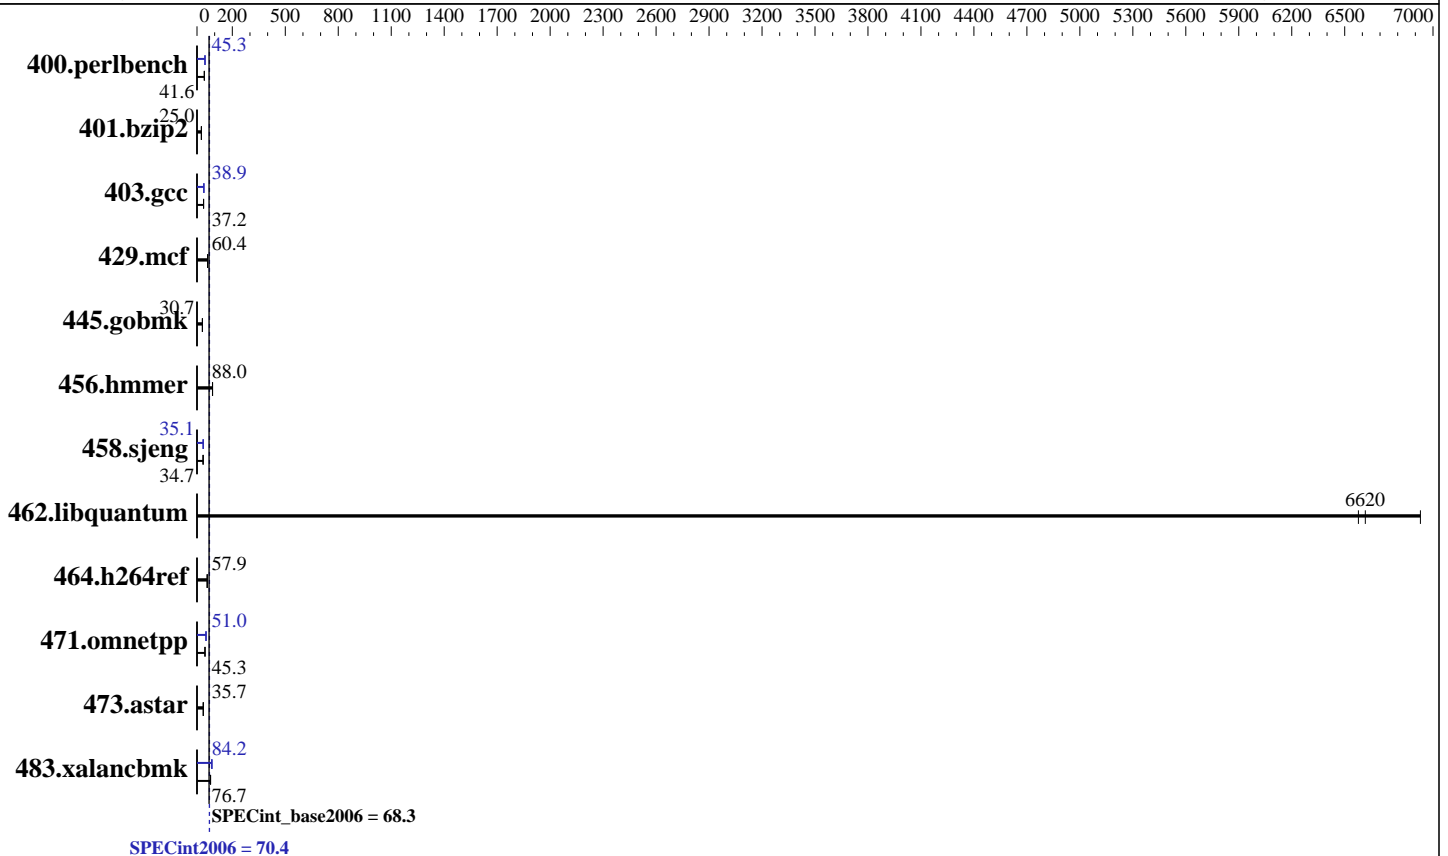

## Hardware

CPU Name: Intel Xeon E5-2697 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2400T-R)  
 Disk Subsystem: 2 x 500 GB SAS HDD 10 K, RAID 1  
 Other Hardware: None

## Software

Operating System: SuSE Linux Enterprise 12 (x86\_64) SP1  
 Kernel 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 5 (multi-user, w/GUI)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen9

(2.30 GHz, Intel Xeon E5-2697 v4)

SPECint2006 = 70.4

SPECint\_base2006 = 68.3

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	235	41.5	234	41.8	<u>235</u>	<u>41.6</u>	<u>216</u>	<u>45.3</u>	216	45.2	216	45.3
401.bzip2	388	24.8	386	25.0	<u>386</u>	<u>25.0</u>	388	24.8	386	25.0	<u>386</u>	<u>25.0</u>
403.gcc	216	37.3	<u>216</u>	<u>37.2</u>	216	37.2	206	39.0	207	38.9	<u>207</u>	<u>38.9</u>
429.mcf	151	60.4	<u>151</u>	<u>60.4</u>	151	60.4	151	60.4	<u>151</u>	<u>60.4</u>	151	60.4
445.gobmk	342	30.6	<u>342</u>	<u>30.7</u>	342	30.7	342	30.6	<u>342</u>	<u>30.7</u>	342	30.7
456.hammer	106	87.6	<u>106</u>	<u>88.0</u>	106	88.2	106	87.6	<u>106</u>	<u>88.0</u>	106	88.2
458.sjeng	349	34.7	349	34.7	<u>349</u>	<u>34.7</u>	345	35.0	345	35.1	<u>345</u>	<u>35.1</u>
462.libquantum	2.99	6930	<u>3.13</u>	<u>6620</u>	3.15	6580	2.99	6930	<u>3.13</u>	<u>6620</u>	3.15	6580
464.h264ref	382	57.9	<u>382</u>	<u>57.9</u>	382	58.0	382	57.9	<u>382</u>	<u>57.9</u>	382	58.0
471.omnetpp	<u>138</u>	<u>45.3</u>	138	45.4	138	45.1	122	51.0	123	51.0	<u>123</u>	<u>51.0</u>
473.astar	<u>197</u>	<u>35.7</u>	197	35.6	197	35.7	<u>197</u>	<u>35.7</u>	197	35.6	197	35.7
483.xalancbmk	89.8	76.9	<u>90.0</u>	<u>76.7</u>	90.0	76.7	<u>81.9</u>	<u>84.2</u>	81.9	84.3	82.1	84.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Platform Notes

BIOS Configuration:

Intel Hyperthreading Option set to Disabled

Power Profile set to Custom

Power Regulator set to Static High Performance Mode

Minimum Processor Idle Power Core C-State set to C1E State

Minimum Processor Idle Power Package C-State set to No Package State

Collaborative Power Control set to Disabled

QPI Snoop Configuration set to Home Snoop

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Memory Refresh Rate set to 1x Refresh

Sysinfo program /home/cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on bl460c2-gen9-b Fri Apr 1 15:05:15 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen9  
(2.30 GHz, Intel Xeon E5-2697 v4)

SPECint2006 = 70.4

SPECint\_base2006 = 68.3

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2697 v4 @ 2.30GHz
 2 "physical id"s (chips)
36 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 18
  siblings  : 18
  physical 0: cores 0 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB

```

```

From /proc/meminfo
MemTotal:      264327280 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"

```

```

uname -a:
Linux bl460c2-gen9-b 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 5 Apr 1 11:04

```

SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   424G  218G  206G  52% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen9  
(2.30 GHz, Intel Xeon E5-2697 v4)

SPECint2006 = 70.4

SPECint\_base2006 = 68.3

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP I36 02/22/2016

Memory:

8x UNKNOWN NOT AVAILABLE

8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:  
8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "36"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen9  
(2.30 GHz, Intel Xeon E5-2697 v4)

SPECint2006 = 70.4

SPECint\_base2006 = 68.3

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmarthheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen9

(2.30 GHz, Intel Xeon E5-2697 v4)

SPECint2006 =

70.4

SPECint\_base2006 =

68.3

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-ansi-alias

401.bzip2: basepeak = yes

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant BL460c Gen9**

(2.30 GHz, Intel Xeon E5-2697 v4)

**SPECint2006 =**

**70.4**

**SPECint\_base2006 =**

**68.3**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Mar-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue May 3 18:01:00 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 May 2016.