



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018TR-T
(X10DRT-L , Intel Xeon E5-2667 v4)

SPECfp®_rate2006 = 712

SPECfp_rate_base2006 = 696

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

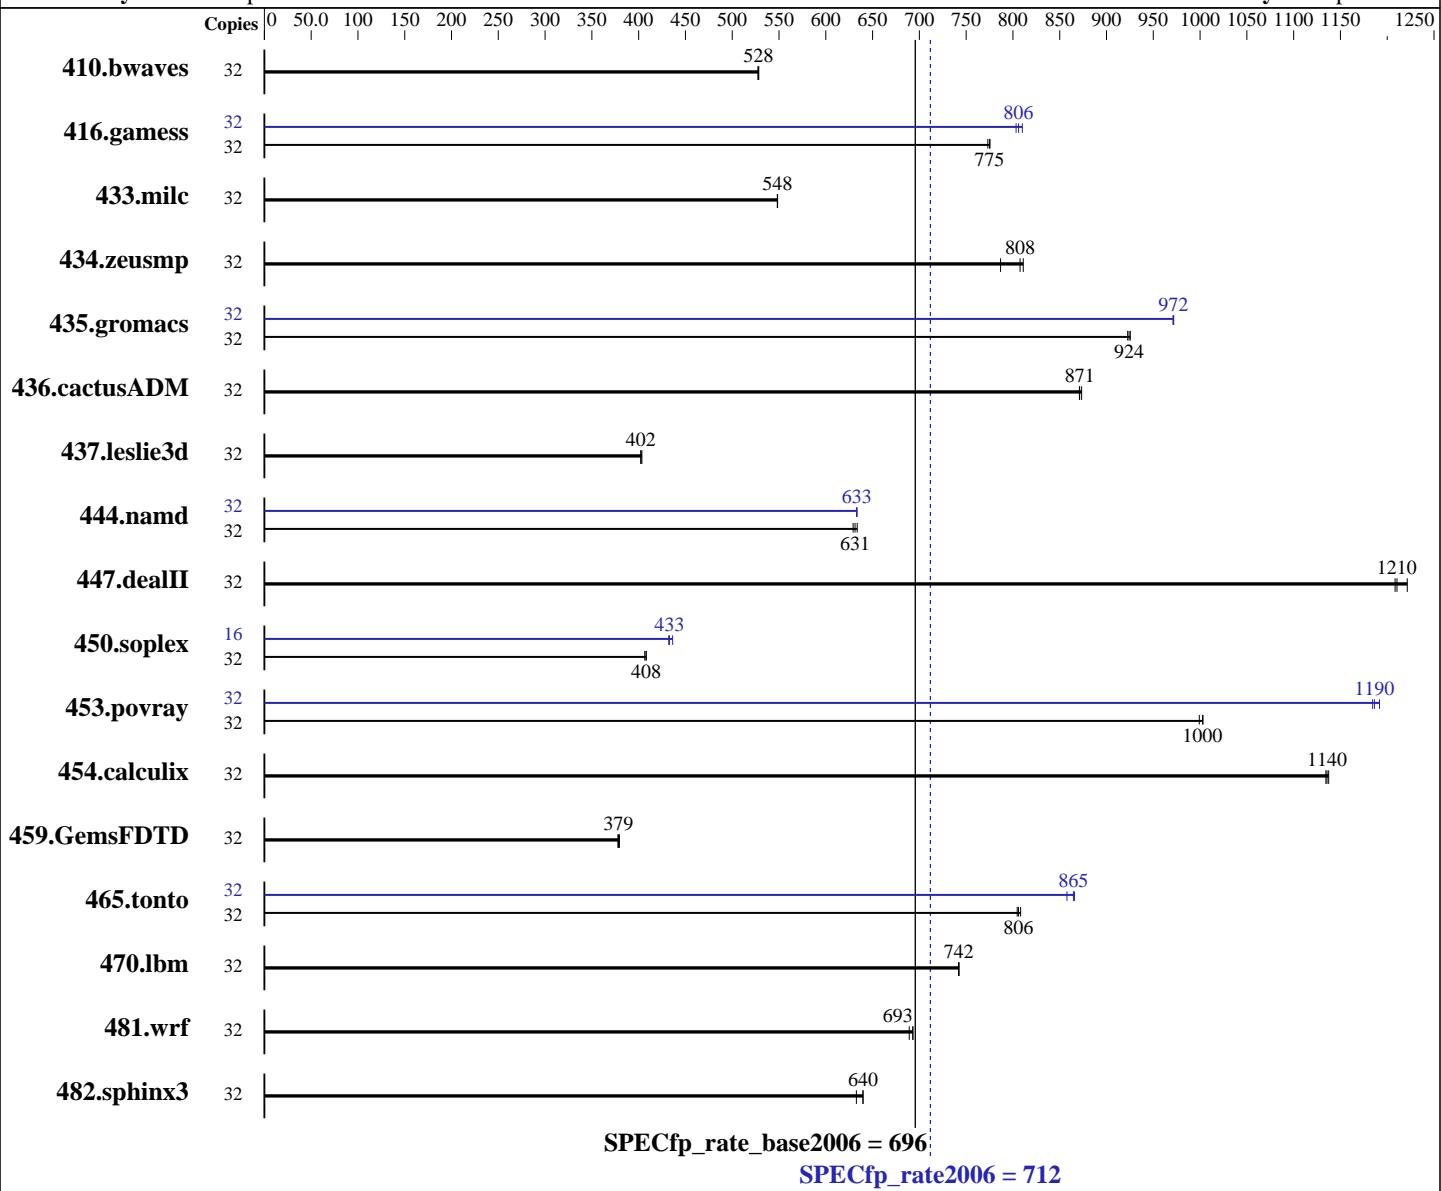

Hardware

CPU Name: Intel Xeon E5-2667 v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz: 3200
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP1, Kernel 3.12.49-11-default
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018TR-T
(X10DRT-L , Intel Xeon E5-2667 v4)

SPECfp_rate2006 = 712

SPECfp_rate_base2006 = 696

CPU2006 license: 001176

Test date: May-2016

Test sponsor: Supermicro

Hardware Availability: Mar-2016

Tested by: Supermicro

Software Availability: Sep-2015

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 400 GB SATA III SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	825	527	823	528	824	528	32	825	527	823	528	824	528
416.gamess	32	810	773	808	775	808	775	32	777	806	780	803	773	810
433.milc	32	536	548	536	548	536	548	32	536	548	536	548	536	548
434.zeusmp	32	370	787	359	811	361	808	32	370	787	359	811	361	808
435.gromacs	32	247	924	247	925	248	923	32	235	972	235	972	235	971
436.cactusADM	32	439	871	438	873	439	871	32	439	871	438	873	439	871
437.leslie3d	32	747	402	746	403	748	402	32	747	402	746	403	748	402
444.namd	32	405	634	407	631	408	629	32	405	633	405	633	406	633
447.dealII	32	302	1210	303	1210	300	1220	32	302	1210	303	1210	300	1220
450.soplex	32	654	408	657	406	654	408	16	306	436	309	432	308	433
453.povray	32	170	1000	170	1000	170	999	32	143	1190	143	1190	144	1180
454.calculix	32	233	1130	232	1140	232	1140	32	233	1130	232	1140	232	1140
459.GemsFDTD	32	895	379	899	378	897	379	32	895	379	899	378	897	379
465.tonto	32	391	806	391	805	390	808	32	364	866	367	858	364	865
470.lbm	32	593	742	592	742	592	742	32	593	742	592	742	592	742
481.wrf	32	519	689	516	693	516	693	32	519	689	516	693	516	693
482.sphinx3	32	986	633	975	640	975	640	32	986	633	975	640	975	640

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Early Snoop = Disable

Sysinfo program /home/cpu2006_ic16/config/sysinfo.rev6914

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018TR-T
(X10DRT-L , Intel Xeon E5-2667 v4)

SPECfp_rate2006 = 712

SPECfp_rate_base2006 = 696

CPU2006 license: 001176

Test date: May-2016

Test sponsor: Supermicro

Hardware Availability: Mar-2016

Tested by: Supermicro

Software Availability: Sep-2015

Platform Notes (Continued)

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-hp47 Wed May 4 02:27:21 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2667 v4 @ 3.20GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 8
    siblings : 16
    physical 0: cores 0 2 3 4 8 10 11 12
    physical 1: cores 0 2 3 4 8 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:       264379864 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-hp47 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 3 17:33
```

```
SPEC is set to: /home/cpu2006_ic16
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      btrfs  373G   37G  336G  10% /
Additional information from dmidecode:
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018TR-T
(X10DRT-L , Intel Xeon E5-2667 v4)

SPECfp_rate2006 = 712

SPECfp_rate_base2006 = 696

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0 12/17/2015

Memory:

8x Micron 36ASF4G72PZ-2G3A1 32 GB 2 rank 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006_ic16/libs/32:/home/cpu2006_ic16/libs/64:/home/cpu2006_ic16/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018TR-T
(X10DRT-L , Intel Xeon E5-2667 v4)

SPECfp_rate2006 = 712

SPECfp_rate_base2006 = 696

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

Base Portability Flags (Continued)

```
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018TR-T
(X10DRT-L , Intel Xeon E5-2667 v4)

SPECfp_rate2006 = 712

SPECfp_rate_base2006 = 696

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018TR-T
(X10DRT-L , Intel Xeon E5-2667 v4)

SPECfp_rate2006 = 712

SPECfp_rate_base2006 = 696

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018TR-T
(X10DRT-L , Intel Xeon E5-2667 v4)

SPECfp_rate2006 = 712

SPECfp_rate_base2006 = 696

CPU2006 license: 001176

Test date: May-2016

Test sponsor: Supermicro

Hardware Availability: Mar-2016

Tested by: Supermicro

Software Availability: Sep-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jun 1 19:10:37 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 June 2016.