



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp[®]_rate2006 = **824**

Express5800/R120g-1M (Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = **805**

CPU2006 license: 9006


Test date: May-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

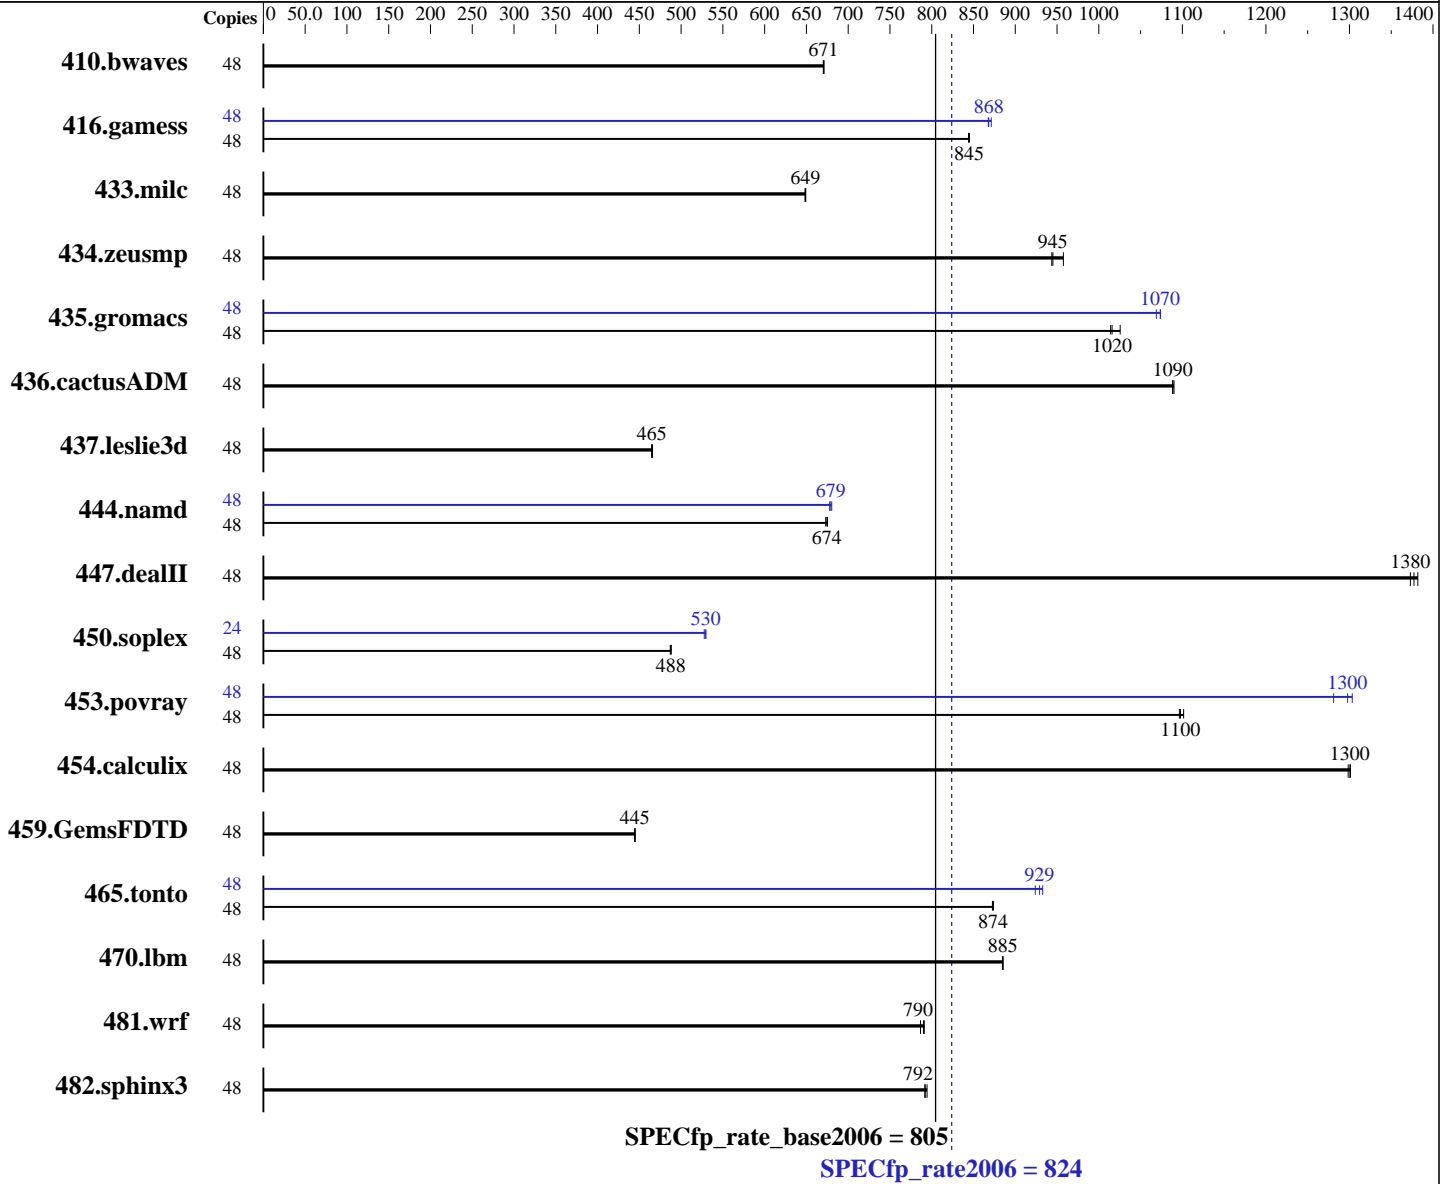

Hardware

CPU Name: Intel Xeon E5-2650 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Kernel 3.10.0-327.4.5.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = **824**

Express5800/R120g-1M (Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = **805**

CPU2006 license: 9006

Test date: May-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	972	671	973	671	973	670	48	972	671	973	671	973	670
416.gamess	48	1112	845	1113	845	1114	844	48	1082	868	1079	871	1083	868
433.milc	48	679	649	680	648	679	649	48	679	649	680	648	679	649
434.zeusmp	48	456	958	462	945	463	944	48	456	958	462	945	463	944
435.gromacs	48	334	1030	338	1010	337	1020	48	319	1070	321	1070	319	1070
436.cactusADM	48	527	1090	527	1090	526	1090	48	527	1090	527	1090	526	1090
437.leslie3d	48	969	466	970	465	971	465	48	969	466	970	465	971	465
444.namd	48	570	675	571	674	572	673	48	567	679	568	678	566	680
447.dealII	48	397	1380	399	1380	400	1370	48	397	1380	399	1380	400	1370
450.soplex	48	820	488	821	488	822	487	24	378	530	378	530	379	528
453.povray	48	233	1100	232	1100	233	1100	48	199	1280	196	1300	197	1300
454.calculix	48	304	1300	305	1300	304	1300	48	304	1300	305	1300	304	1300
459.GemsFDTD	48	1144	445	1146	445	1146	444	48	1144	445	1146	445	1146	444
465.tonto	48	541	874	541	873	541	874	48	508	929	506	933	511	924
470.lbm	48	745	885	745	885	745	885	48	745	885	745	885	745	885
481.wrf	48	679	790	678	791	682	787	48	679	790	678	791	682	787
482.sphinx3	48	1178	794	1181	792	1182	792	48	1178	794	1181	792	1182	792

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Power Management Policy: Custom
Energy Performance: Performance

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 824

Express5800/R120g-1M (Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 805

CPU2006 license: 9006

Test date: May-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

Platform Notes (Continued)

Patrol Scrub: Disabled
Cluster on Die: Enabled

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

The Express5800/R120g-1M (Intel Xeon E5-2650 v4) and the Express5800/R120g-2M (Intel Xeon E5-2650 v4) models are electronically equivalent. The results have been measured on the Express5800/R120g-2M (Intel Xeon E5-2650 v4) model.

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.lelie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 824

Express5800/R120g-1M (Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 805

CPU2006 license: 9006

Test date: May-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

Base Portability Flags (Continued)

```

447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 824

Express5800/R120g-1M (Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 805

CPU2006 license: 9006

Test date: May-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -unroll4 -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 824

Express5800/R120g-1M (Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 805

CPU2006 license: 9006

Test date: May-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 824

Express5800/R120g-1M (Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 805

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2016

Hardware Availability: Apr-2016

Software Availability: Jan-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jun 1 19:10:55 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 June 2016.