



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018R-TDTP
(X10DRD-LTP , Intel Xeon E5-2618L v4)

SPECfp[®]_rate2006 = 660

SPECfp_rate_base2006 = 646

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

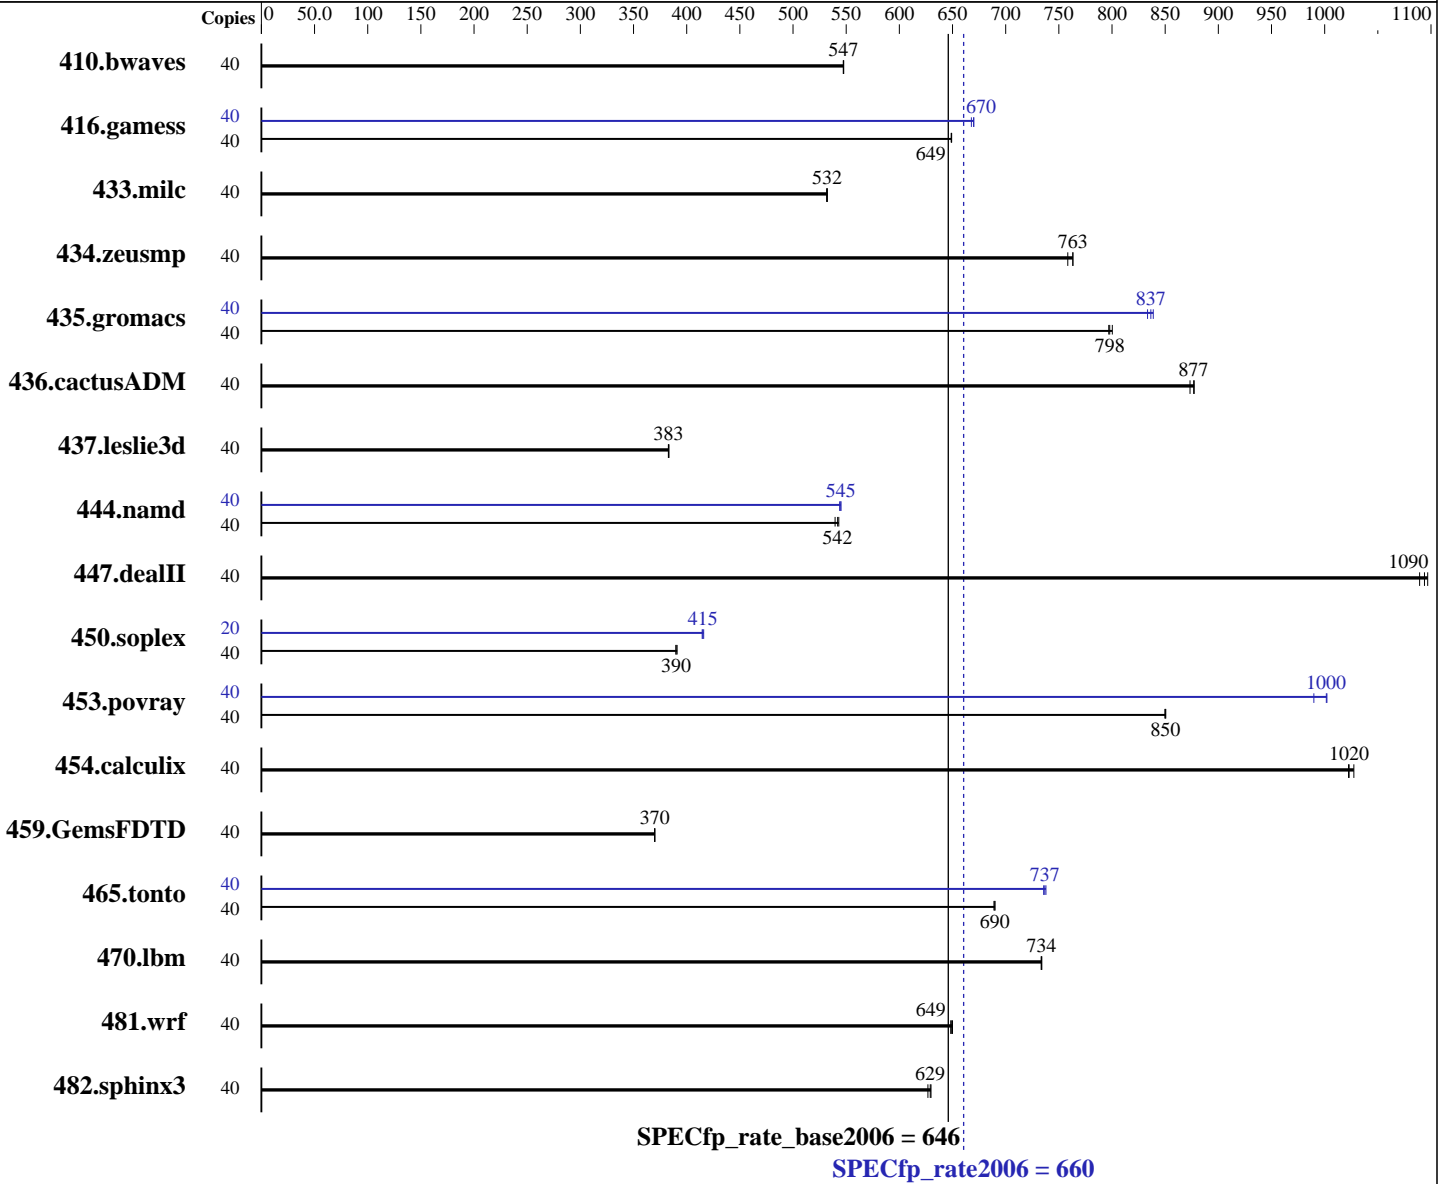

Hardware

CPU Name: Intel Xeon E5-2618L v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2, Kernel 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018R-TDTP
(X10DRD-LTP , Intel Xeon E5-2618L v4)

SPECfp_rate2006 = **660**

SPECfp_rate_base2006 = **646**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 1 x 400 GB SATA III SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	993	548	993	547	993	547	40	993	548	993	547	993	547
416.gamess	40	1207	649	1207	649	1207	649	40	1169	670	1169	670	1173	668
433.milc	40	691	532	690	532	690	532	40	691	532	690	532	690	532
434.zeusmp	40	477	763	480	758	477	763	40	477	763	480	758	477	763
435.gromacs	40	357	800	358	798	358	797	40	340	839	343	833	341	837
436.cactusADM	40	547	873	545	877	545	877	40	547	873	545	877	545	877
437.leslie3d	40	982	383	981	383	982	383	40	982	383	981	383	982	383
444.namd	40	591	543	592	542	595	540	40	589	545	590	544	589	545
447.dealII	40	418	1090	420	1090	417	1100	40	418	1090	420	1090	417	1100
450.soplex	40	856	390	853	391	855	390	20	401	416	402	415	402	415
453.povray	40	250	850	250	850	250	851	40	212	1000	215	990	212	1000
454.calculix	40	323	1020	323	1020	321	1030	40	323	1020	323	1020	321	1030
459.GemsFDTD	40	1147	370	1147	370	1147	370	40	1147	370	1147	370	1147	370
465.tonto	40	571	690	571	690	571	689	40	535	736	534	737	533	738
470.lbm	40	749	734	749	733	749	734	40	749	734	749	733	749	734
481.wrf	40	689	648	687	650	688	649	40	689	648	687	650	688	649
482.sphinx3	40	1239	629	1244	627	1238	630	40	1239	629	1244	627	1238	630

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Early Snoop = Disable
Sysinfo program /home/cpu2006_ic16/config/sysinfo.rev6914
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018R-TDTP
(X10DRD-LTP , Intel Xeon E5-2618L v4)

SPECfp_rate2006 = 660

SPECfp_rate_base2006 = 646

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

Platform Notes (Continued)

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri May 27 20:34:07 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2618L v4 @ 2.20GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      263860080 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 27 08:29

```
SPEC is set to: /home/cpu2006_ic16
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   216G  39G  178G  18% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018R-TDTP
(X10DRD-LTP , Intel Xeon E5-2618L v4)

SPECfp_rate2006 = 660

SPECfp_rate_base2006 = 646

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0 02/26/2016

Memory:

8x Micron 36ASF4G72PZ-2G3A1 32 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006_ic16/libs/32:/home/cpu2006_ic16/libs/64:/home/cpu2006_ic16/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018R-TDTP
(X10DRD-LTP , Intel Xeon E5-2618L v4)

SPECfp_rate2006 = 660

SPECfp_rate_base2006 = 646

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

Base Portability Flags (Continued)

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018R-TDTP
(X10DRD-LTP , Intel Xeon E5-2618L v4)

SPECfp_rate2006 = 660

SPECfp_rate_base2006 = 646

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32
447.dealII: basepeak = yes
450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -opt-malloc-options=3
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -unroll4 -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018R-TDTP
(X10DRD-LTP , Intel Xeon E5-2618L v4)

SPECfp_rate2006 = 660

SPECfp_rate_base2006 = 646

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018R-TDTP
(X10DRD-LTP , Intel Xeon E5-2618L v4)

SPECfp_rate2006 = 660

SPECfp_rate_base2006 = 646

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 14:07:16 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 June 2016.