



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 480

PowerEdge R430 (Intel Xeon E5-1680 v4, 3.40 GHz)

SPECint\_rate\_base2006 = 456

CPU2006 license: 55


Test date: Jun-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

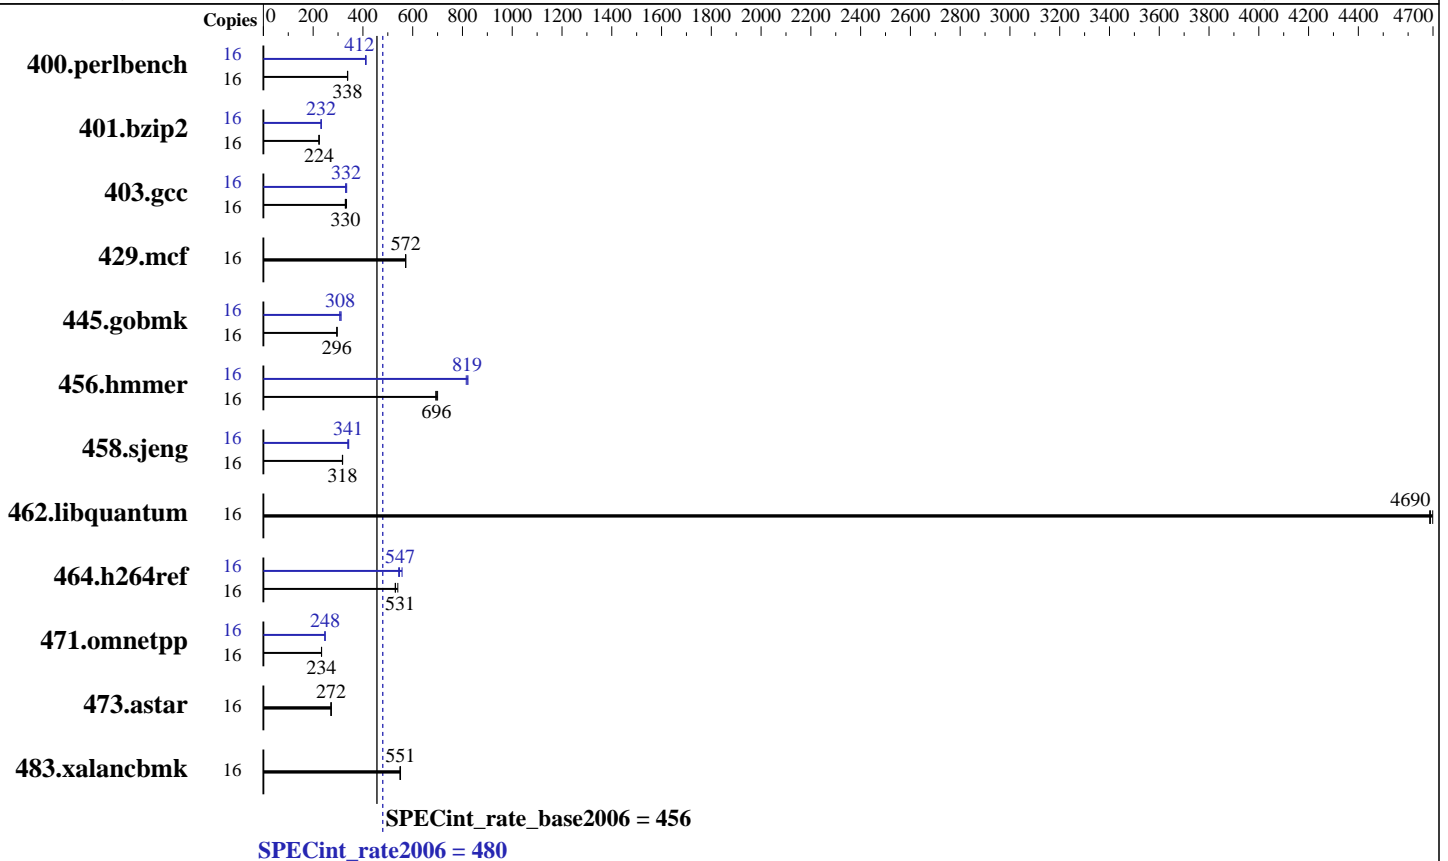

## Hardware

CPU Name: Intel Xeon E5-1680 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx8 PC4-2400T-R)  
 Disk Subsystem: 1 x 250 GB 7200 RPM SATA HDD  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 480

PowerEdge R430 (Intel Xeon E5-1680 v4, 3.40 GHz)

SPECint\_rate\_base2006 = 456

CPU2006 license: 55

Test date: Jun-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	463	338	<b><u>462</u></b>	<b><u>338</u></b>	461	339	16	379	412	381	411	<b><u>380</u></b>	<b><u>412</u></b>
401.bzip2	16	<b><u>690</u></b>	<b><u>224</u></b>	691	223	689	224	16	<b><u>665</u></b>	<b><u>232</u></b>	665	232	665	232
403.gcc	16	<b><u>391</u></b>	<b><u>330</u></b>	391	329	386	334	16	<b><u>388</u></b>	<b><u>332</u></b>	385	335	390	331
429.mcf	16	<b><u>255</u></b>	<b><u>572</u></b>	255	572	256	571	16	<b><u>255</u></b>	<b><u>572</u></b>	255	572	256	571
445.gobmk	16	567	296	568	296	<b><u>568</u></b>	<b><u>296</u></b>	16	<b><u>545</u></b>	<b><u>308</u></b>	537	312	546	308
456.hammer	16	216	693	<b><u>214</u></b>	<b><u>696</u></b>	213	700	16	183	815	182	822	<b><u>182</u></b>	<b><u>819</u></b>
458.sjeng	16	610	317	<b><u>608</u></b>	<b><u>318</u></b>	608	318	16	564	343	570	340	<b><u>568</u></b>	<b><u>341</u></b>
462.libquantum	16	70.7	4690	<b><u>70.7</u></b>	<b><u>4690</u></b>	70.6	4700	16	70.7	4690	<b><u>70.7</u></b>	<b><u>4690</u></b>	70.6	4700
464.h264ref	16	<b><u>667</u></b>	<b><u>531</u></b>	668	530	655	540	16	635	557	651	544	<b><u>648</u></b>	<b><u>547</u></b>
471.omnetpp	16	429	233	<b><u>428</u></b>	<b><u>234</u></b>	428	234	16	404	247	404	248	<b><u>404</u></b>	<b><u>248</u></b>
473.astar	16	414	271	<b><u>413</u></b>	<b><u>272</u></b>	411	273	16	414	271	<b><u>413</u></b>	<b><u>272</u></b>	411	273
483.xalancbmk	16	201	549	200	551	<b><u>201</u></b>	<b><u>551</u></b>	16	201	549	200	551	<b><u>201</u></b>	<b><u>551</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
 Snoop Mode set to Opportunistic Snoop Broadcast  
 Virtualization Technology disabled  
 System Profile set to custom  
 CPU Power Management set to Hardware P States  
 C States set to Autonomous  
 C1E disabled  
 Energy Efficient Turbo disabled  
 Uncore Frequency set to Dynamic  
 Energy Efficiency Policy set to Balanced Performance  
 Memory Patrol Scrub disabled  
 Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914  
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
 running on linux-nlxa Tue Jun 14 19:30:22 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 480

PowerEdge R430 (Intel Xeon E5-1680 v4, 3.40 GHz)

SPECint\_rate\_base2006 = 456

CPU2006 license: 55

Test date: Jun-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

## Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) CPU E5-1680 v4 @ 3.40GHz
 1 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
 cache size : 20480 KB

```

From /proc/meminfo

```

MemTotal:      132054576 kB
HugePages_Total:       0
Hugepagesize:       2048 kB

```

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP1

From /etc/\*release\* /etc/\*version\*

```

SuSE-release:
 SUSE Linux Enterprise Server 12 (x86_64)
 VERSION = 12
 PATCHLEVEL = 1
 # This file is deprecated and will be removed in a future service pack or
 release.
 # Please check /etc/os-release for details about this release.
os-release:
 NAME="SLES"
 VERSION="12-SP1"
 VERSION_ID="12.1"
 PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
 ID="sles"
 ANSI_COLOR="0;32"
 CPE_NAME="cpe:/o:suse:sles:12:sp1"

```

uname -a:

```

Linux linux-nlxa 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jun 14 19:27

SPEC is set to: /root/cpu2006-1.2

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  221G  8.8G  212G   4% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 480

PowerEdge R430 (Intel Xeon E5-1680 v4, 3.40 GHz)

SPECint\_rate\_base2006 = 456

CPU2006 license: 55

Test date: Jun-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

## Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.0.1 04/11/2016

Memory:

4x 00AD063200AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz

4x 00CE00B300CE M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz

4x Not Specified Not Specified

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB

memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -D\_FILE\_OFFSET\_BITS=64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmmer: -D\_FILE\_OFFSET\_BITS=64

458.sjeng: -D\_FILE\_OFFSET\_BITS=64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 480

PowerEdge R430 (Intel Xeon E5-1680 v4, 3.40 GHz)

SPECint\_rate\_base2006 = 456

CPU2006 license: 55

Test date: Jun-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

## Base Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 480

PowerEdge R430 (Intel Xeon E5-1680 v4, 3.40 GHz)

SPECint\_rate\_base2006 = 456

CPU2006 license: 55

Test date: Jun-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

## Peak Portability Flags (Continued)

456.hmmcr: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
 458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
 462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
 471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
 473.astar: -D\_FILE\_OFFSET\_BITS=64  
 483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
 -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
 -opt-mem-layout-trans=3

456.hmmcr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
 -opt-ra-region-strategy=block -Wl,-z,muldefs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 480

PowerEdge R430 (Intel Xeon E5-1680 v4, 3.40 GHz)

SPECint\_rate\_base2006 = 456

CPU2006 license: 55

Test date: Jun-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

## Peak Optimization Flags (Continued)

471.omnetpp (continued):  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 9 17:04:01 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 August 2016.