



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Huawei

### SPECfp<sup>®</sup>\_rate2006 = Not Run

### Huawei RH5885 V3 (Intel Xeon E7-4830 v4)

### SPECfp\_rate\_base2006 = 1130

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2016

Hardware Availability: Jun-2016

Software Availability: Oct-2015

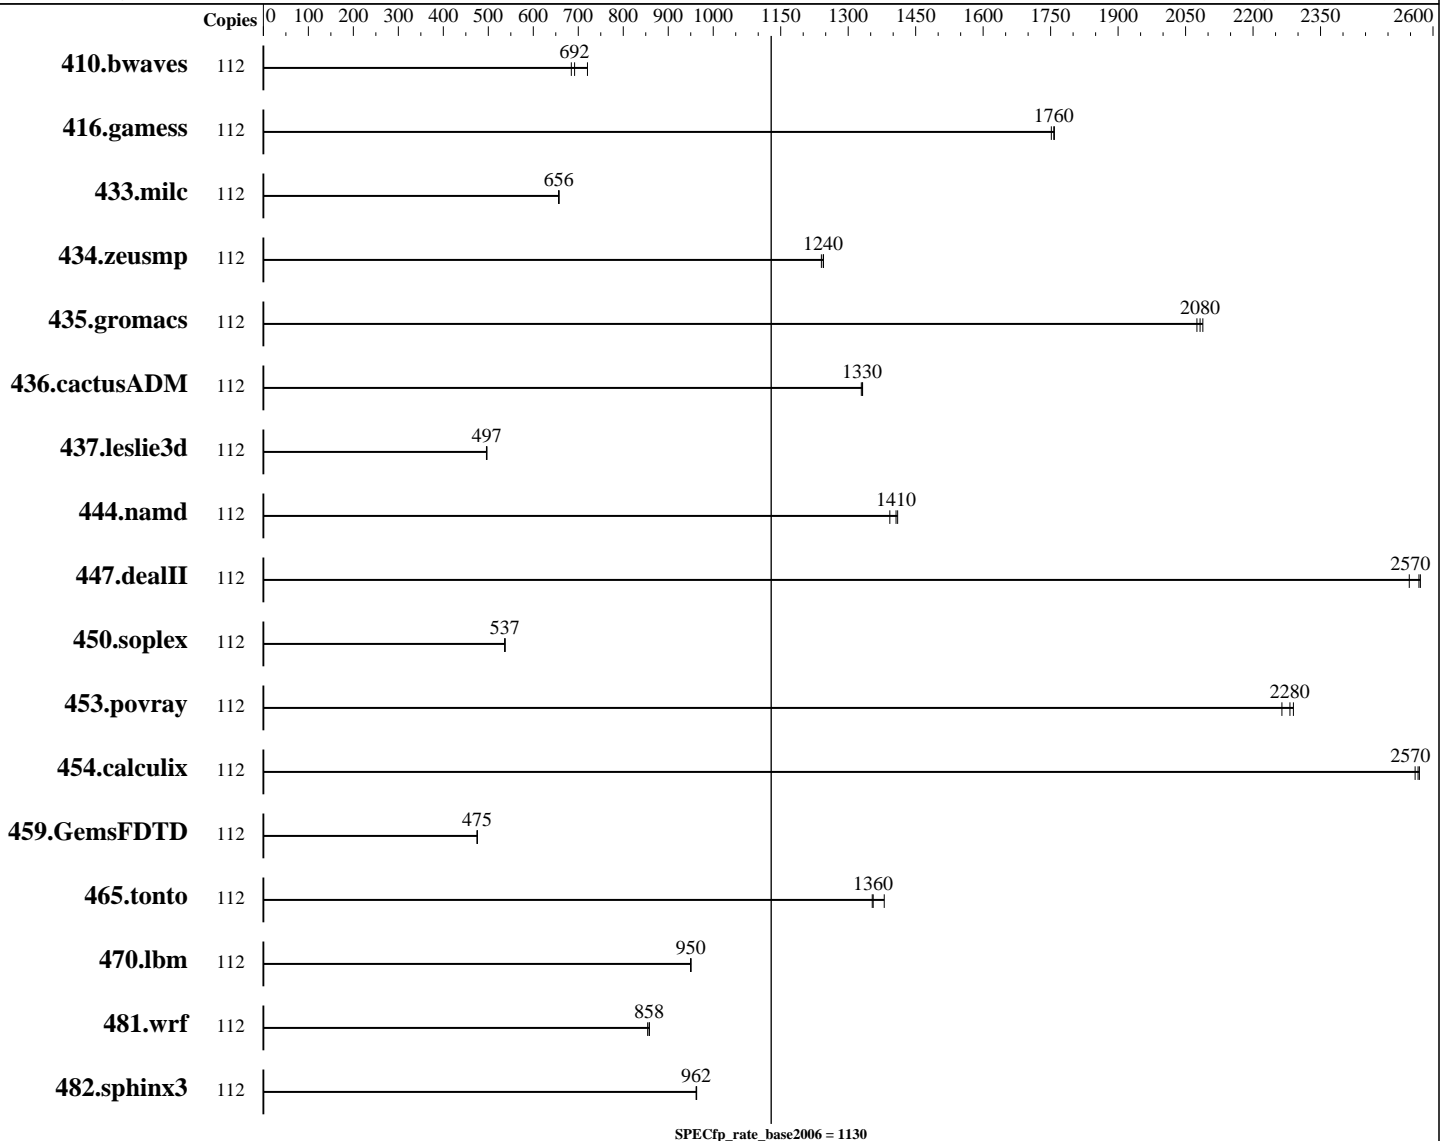

### Hardware

CPU Name: Intel Xeon E7-4830 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 56 cores, 4 chips, 14 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = Not Run

Huawei RH5885 V3 (Intel Xeon E7-4830 v4)

SPECfp\_rate\_base2006 = 1130

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2016

Hardware Availability: Jun-2016

Software Availability: Oct-2015

L3 Cache: 35 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)  
 Disk Subsystem: 2 x 600 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	112	2113	720	2224	685	<b>2200</b>	<b>692</b>							
416.gamess	112	1247	1760	1252	1750	<b>1248</b>	<b>1760</b>							
433.milc	112	<b>1566</b>	<b>656</b>	1564	657	1566	656							
434.zeusmp	112	819	1250	822	1240	<b>819</b>	<b>1240</b>							
435.gromacs	112	385	2080	<b>384</b>	<b>2080</b>	383	2090							
436.cactusADM	112	<b>1005</b>	<b>1330</b>	1007	1330	1005	1330							
437.leslie3d	112	2123	496	<b>2120</b>	<b>497</b>	2119	497							
444.namd	112	637	1410	<b>639</b>	<b>1410</b>	645	1390							
447.dealII	112	<b>499</b>	<b>2570</b>	503	2550	498	2570							
450.soplex	112	1741	537	<b>1740</b>	<b>537</b>	1738	537							
453.povray	112	260	2290	<b>261</b>	<b>2280</b>	263	2260							
454.calculix	112	361	2560	360	2570	<b>360</b>	<b>2570</b>							
459.GemsFDTD	112	<b>2500</b>	<b>475</b>	2500	475	2499	475							
465.tonto	112	799	1380	<b>813</b>	<b>1360</b>	814	1350							
470.lbm	112	1620	950	<b>1620</b>	<b>950</b>	1619	951							
481.wrf	112	<b>1459</b>	<b>858</b>	1458	858	1465	854							
482.sphinx3	112	<b>2268</b>	<b>962</b>	2266	963	2268	962							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
 Turbo mode set with:  
 cpupower -c all frequency-set -g performance



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = Not Run

Huawei RH5885 V3 (Intel Xeon E7-4830 v4)

SPECfp\_rate\_base2006 = 1130

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2016

Hardware Availability: Jun-2016

Software Availability: Oct-2015

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Lock\_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Set C-State to C0/C1

Sysinfo program /home/spec2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on RH5885v3 Sat Aug 6 10:03:20 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-4830 v4 @ 2.00GHz

4 "physical id"s (chips)

112 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 14

siblings : 28

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

cache size : 35840 KB

From /proc/meminfo

MemTotal: 263847592 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.2 (Maipo)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="7.2"

PRETTY\_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"

ANSI\_COLOR="0;31"

CPE\_NAME="cpe:/o:redhat:enterprise\_linux:7.2:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.2:ga:server

uname -a:

Linux RH5885v3 3.10.0-327.el7.x86\_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015

x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Aug 5 03:10

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = Not Run

Huawei RH5885 V3 (Intel Xeon E7-4830 v4)

SPECfp\_rate\_base2006 = 1130

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Aug-2016  
Hardware Availability: Jun-2016  
Software Availability: Oct-2015

## Platform Notes (Continued)

SPEC is set to: /home/spec2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	838G	56G	783G	7%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISV767 07/27/2016

Memory:

16x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1333 MHz  
32x NO DIMM NO DIMM

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have two lines reading as:

16x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1333 MHz  
32x NO DIMM NO DIMM

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/spec2006/libs/32:/home/spec2006/libs/64:/home/spec2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = Not Run

Huawei RH5885 V3 (Intel Xeon E7-4830 v4)

SPECfp\_rate\_base2006 = 1130

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Aug-2016  
Hardware Availability: Jun-2016  
Software Availability: Oct-2015

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

### C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

### Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

### Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = Not Run

Huawei RH5885 V3 (Intel Xeon E7-4830 v4)

SPECfp\_rate\_base2006 = 1130

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2016

Hardware Availability: Jun-2016

Software Availability: Oct-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Sep 6 16:57:20 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 September 2016.