



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2690 v4, 2.60 GHz)

**SPECint®2006 = 71.4**

**SPECint\_base2006 = 68.7**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jul-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Dec-2015

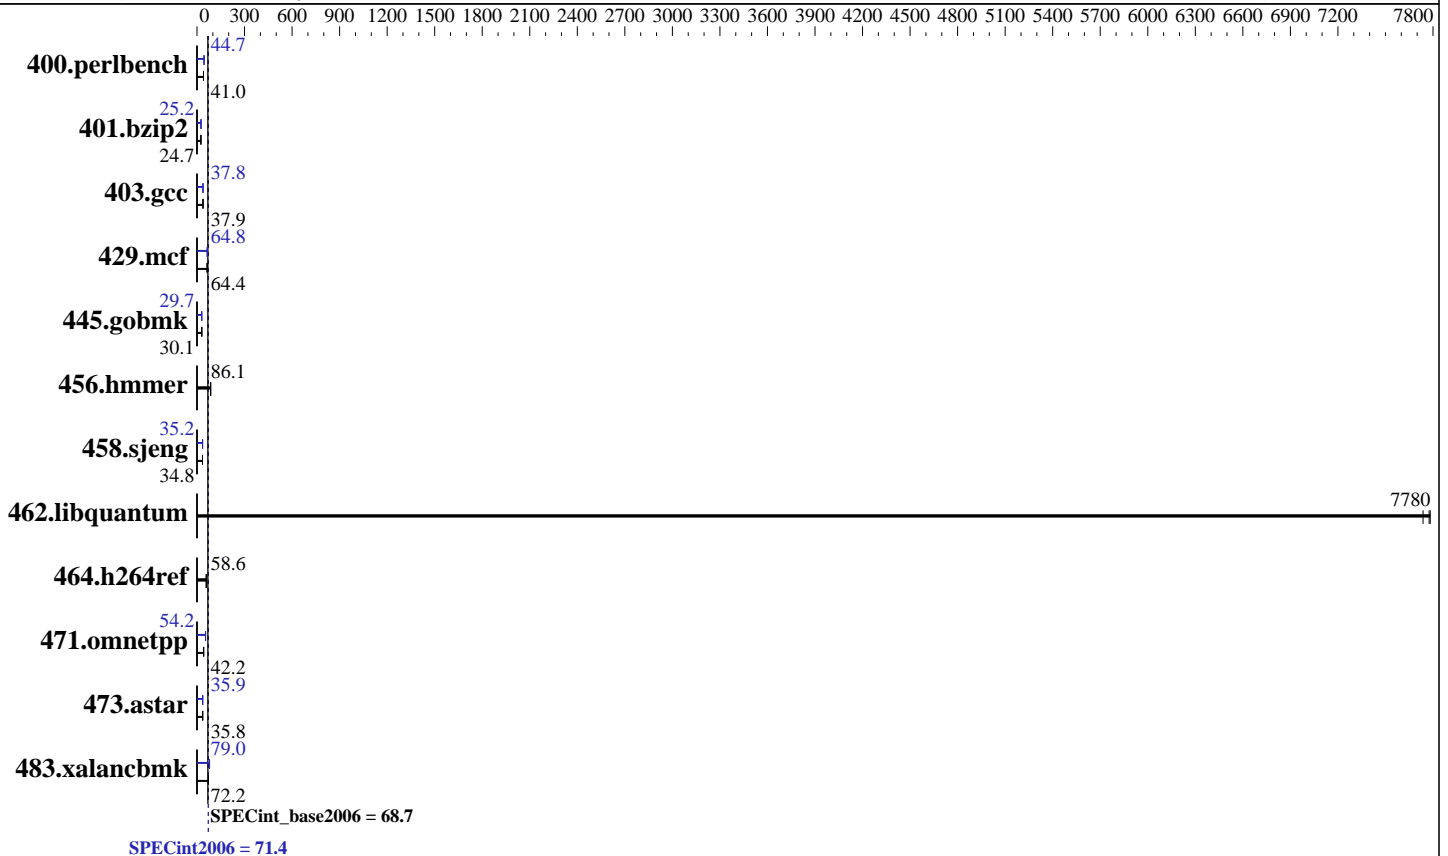

### Hardware

**CPU Name:** Intel Xeon E5-2690 v4  
**CPU Characteristics:** Intel Turbo Boost Technology up to 3.50 GHz  
**CPU MHz:** 2600  
**FPU:** Integrated  
**CPU(s) enabled:** 28 cores, 2 chips, 14 cores/chip  
**CPU(s) orderable:** 1,2 chips  
**Primary Cache:** 32 KB I + 32 KB D on chip per core  
**Secondary Cache:** 256 KB I+D on chip per core  
**L3 Cache:** 35 MB I+D on chip per chip  
**Other Cache:** None  
**Memory:** 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)  
**Disk Subsystem:** 1 x 300 GB SAS HDD, 15K RPM  
**Other Hardware:** None

### Software

**Operating System:** SUSE Linux Enterprise Server 12 SP1 (x86\_64) 3.12.49-11-default  
**Compiler:** C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux  
**Auto Parallel:** Yes  
**File System:** xfs  
**System State:** Run level 3 (multi-user)  
**Base Pointers:** 32/64-bit  
**Peak Pointers:** 32/64-bit  
**Other Software:** Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2690 v4, 2.60 GHz)

SPECint2006 = **71.4**

SPECint\_base2006 = **68.7**

CPU2006 license: 9019  
Test sponsor: Cisco Systems  
Tested by: Cisco Systems

Test date: Jul-2016  
Hardware Availability: Apr-2016  
Software Availability: Dec-2015

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	238	41.1	<b><u>238</u></b>	<b><u>41.0</u></b>	239	40.9	219	44.7	218	44.8	<b><u>219</u></b>	<b><u>44.7</u></b>
401.bzip2	<b><u>390</u></b>	<b><u>24.7</u></b>	392	24.6	388	24.9	383	25.2	<b><u>383</u></b>	<b><u>25.2</u></b>	383	25.2
403.gcc	212	37.9	<b><u>212</u></b>	<b><u>37.9</u></b>	212	38.0	212	37.9	<b><u>213</u></b>	<b><u>37.8</u></b>	214	37.7
429.mcf	<b><u>142</u></b>	<b><u>64.4</u></b>	144	63.4	141	64.5	<b><u>141</u></b>	<b><u>64.8</u></b>	141	64.7	141	64.9
445.gobmk	348	30.1	348	30.2	<b><u>348</u></b>	<b><u>30.1</u></b>	<b><u>353</u></b>	<b><u>29.7</u></b>	353	29.7	353	29.7
456.hammer	109	86.0	108	86.2	<b><u>108</u></b>	<b><u>86.1</u></b>	109	86.0	108	86.2	<b><u>108</u></b>	<b><u>86.1</u></b>
458.sjeng	348	34.7	<b><u>348</u></b>	<b><u>34.8</u></b>	348	34.8	344	35.2	344	35.2	<b><u>344</u></b>	<b><u>35.2</u></b>
462.libquantum	<b><u>2.66</u></b>	<b><u>7780</u></b>	2.66	7780	2.68	7740	<b><u>2.66</u></b>	<b><u>7780</u></b>	2.66	7780	2.68	7740
464.h264ref	378	58.5	<b><u>378</u></b>	<b><u>58.6</u></b>	377	58.7	378	58.5	<b><u>378</u></b>	<b><u>58.6</u></b>	377	58.7
471.omnetpp	147	42.5	<b><u>148</u></b>	<b><u>42.2</u></b>	151	41.4	<b><u>115</u></b>	<b><u>54.2</u></b>	115	54.2	116	53.9
473.astar	196	35.9	<b><u>196</u></b>	<b><u>35.8</u></b>	196	35.8	<b><u>195</u></b>	<b><u>35.9</u></b>	195	35.9	195	35.9
483.xalancbmk	95.9	71.9	<b><u>95.5</u></b>	<b><u>72.2</u></b>	95.4	72.3	87.1	79.2	<b><u>87.4</u></b>	<b><u>79.0</u></b>	87.4	79.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### BIOS Settings:

```

Intel Hyper-Threading Technology option set to Disabled
CPU performance set to Enterprise
Power Technology set to Energy Efficient
Energy Performance BIAS setting set to Balanced Performance
Memory RAS configuration set to Maximum Performance
Memory Power Saving Mode set to Disabled
QPI Snoop Mode set to Home Directory Snoop with OSB
Sysinfo program /home/CISCO_Benchmarks/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-f3gd Wed Jul 13 11:49:39 2016

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2690 v4@ 2.60GHz
2 "physical id"s (chips)

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2690 v4, 2.60 GHz)

**SPECint2006 = 71.4**

**SPECint\_base2006 = 68.7**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jul-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Dec-2015

### Platform Notes (Continued)

28 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 14
siblings  : 14
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 35840 KB
```

From /proc/meminfo

```
MemTotal:      264368484 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 12 SP1
```

From /etc/\*release\* /etc/\*version\*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
```

```
VERSION = 12
```

```
PATCHLEVEL = 1
```

```
# This file is deprecated and will be removed in a future service pack or release.
```

```
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
```

```
VERSION="12-SP1"
```

```
VERSION_ID="12.1"
```

```
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
```

```
ID="sles"
```

```
ANSI_COLOR="0;32"
```

```
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

uname -a:

```
Linux linux-f3gd 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jul 13 11:48

SPEC is set to: /home/CISCO\_Benchmarks/cpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb1       xfs   238G  41G  198G  17% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C220M4.2.0.9.42.021920161702 02/19/2016

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2690 v4, 2.60 GHz)

SPECint2006 = 71.4

SPECint\_base2006 = 68.7

CPU2006 license: 9019  
Test sponsor: Cisco Systems  
Tested by: Cisco Systems

Test date: Jul-2016  
Hardware Availability: Apr-2016  
Software Availability: Dec-2015

## Platform Notes (Continued)

Memory:  
16x 0xCE00 M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz  
8x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/CISCO\_Benchmarks/cpu2006/libs/32:/home/CISCO\_Benchmarks/cpu2006/libs/64:/home/CISCO\_Benchmarks/cpu2006/sh"  
OMP\_NUM\_THREADS = "28"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:  
icc -m64  
C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

SPECint2006 = 71.4

Cisco UCS C220 M4 (Intel Xeon E5-2690 v4, 2.60 GHz)

SPECint\_base2006 = 68.7

CPU2006 license: 9019

Test date: Jul-2016

Test sponsor: Cisco Systems

Hardware Availability: Apr-2016

Tested by: Cisco Systems

Software Availability: Dec-2015

## Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

445.gobmk: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2690 v4, 2.60 GHz)

**SPECint2006 = 71.4**

**SPECint\_base2006 = 68.7**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jul-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Dec-2015

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel  
-opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2690 v4, 2.60 GHz)

**SPECint2006 = 71.4**

**SPECint\_base2006 = 68.7**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jul-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Dec-2015

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 6 16:57:38 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 September 2016.