



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7800 with  
Radeon R7 Graphics)

**SPECfp®\_rate2006 = 69.2**

**SPECfp\_rate\_base2006 = 68.6**

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2016

Hardware Availability: Jul-2014

Software Availability: Aug-2015

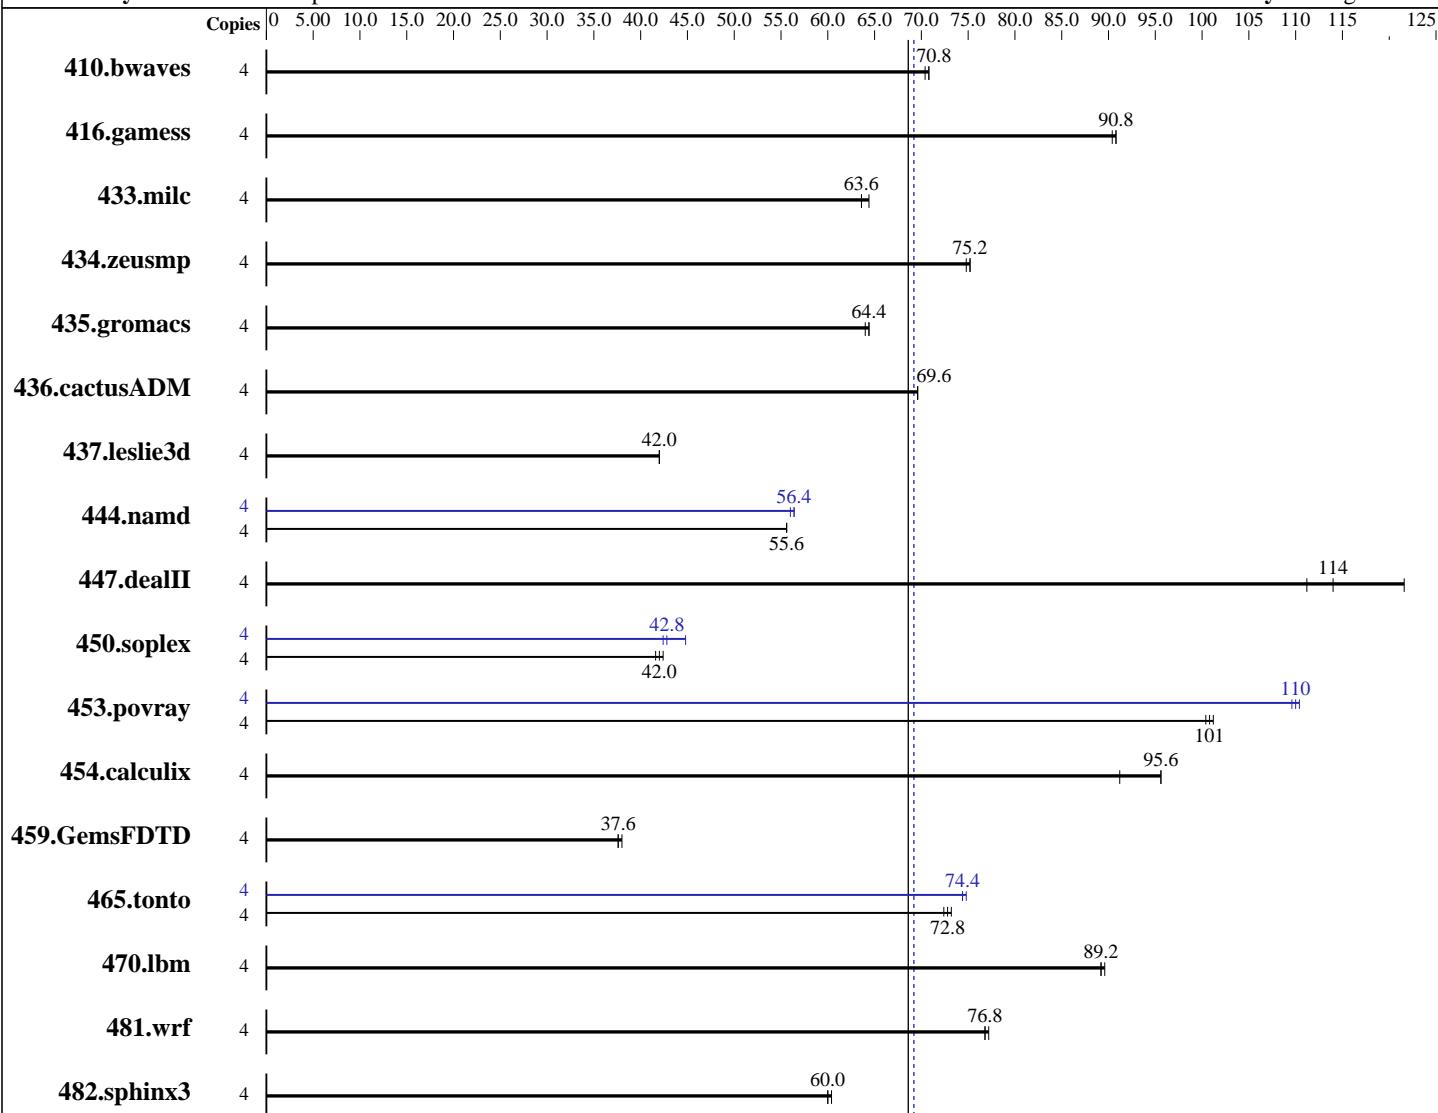

**SPECfp\_rate\_base2006 = 68.6**

**SPECfp\_rate2006 = 69.2**

## Hardware

CPU Name: AMD A10-7800  
 CPU Characteristics: AMD Turbo CORE technology up to 3.90 GHz  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 192 KB I on chip per chip, 96 KB I shared / 2 cores; 16 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores

## Software

Operating System: Microsoft Windows 7 Ultimate 6.1.7601 Service Pack 1 Build 7601  
 Compiler: C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows;  
 Fortran: Version 16.0.0.110 of Intel Fortran Studio XE for Windows;  
 Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013  
 Auto Parallel: No

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7800 with  
Radeon R7 Graphics)

**SPECfp\_rate2006 = 69.2**

**SPECfp\_rate\_base2006 = 68.6**

CPU2006 license: 13

Test date: Jul-2016

Test sponsor: Intel Corporation

Hardware Availability: Jul-2014

Tested by: Intel Corporation

Software Availability: Aug-2015

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600U-11)  
Disk Subsystem: Seagate Barracuda 250 GB SATA, 7200 RPM  
Other Hardware: None

File System: NTFS  
System State: Default  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: SmartHeap Library Version 11.0 from  
<http://www.microquill.com/>

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	<b>769</b>	<b>70.8</b>	768	70.8	770	70.4	4	<b>769</b>	<b>70.8</b>	768	70.8	770	70.4
416.gamess	4	<b>863</b>	<b>90.8</b>	861	90.8	866	90.4	4	<b>863</b>	<b>90.8</b>	861	90.8	866	90.4
433.milc	4	572	64.4	<b>577</b>	<b>63.6</b>	578	63.6	4	572	64.4	<b>577</b>	<b>63.6</b>	578	63.6
434.zeusmp	4	484	75.2	485	74.8	<b>485</b>	<b>75.2</b>	4	484	75.2	485	74.8	<b>485</b>	<b>75.2</b>
435.gromacs	4	446	64.0	<b>443</b>	<b>64.4</b>	443	64.4	4	446	64.0	<b>443</b>	<b>64.4</b>	443	64.4
436.cactusADM	4	685	69.6	686	69.6	<b>685</b>	<b>69.6</b>	4	685	69.6	686	69.6	<b>685</b>	<b>69.6</b>
437.leslie3d	4	891	42.0	<b>893</b>	<b>42.0</b>	898	42.0	4	891	42.0	<b>893</b>	<b>42.0</b>	898	42.0
444.namd	4	<b>575</b>	<b>55.6</b>	577	55.6	575	55.6	4	571	56.0	<b>571</b>	<b>56.4</b>	571	56.4
447.dealII	4	376	122	411	111	<b>401</b>	<b>114</b>	4	376	122	411	111	<b>401</b>	<b>114</b>
450.soplex	4	798	41.6	784	42.4	<b>797</b>	<b>42.0</b>	4	785	42.4	<b>778</b>	<b>42.8</b>	747	44.8
453.povray	4	212	100	211	101	<b>211</b>	<b>101</b>	4	<b>194</b>	<b>110</b>	194	110	193	110
454.calculix	4	<b>345</b>	<b>95.6</b>	345	95.6	362	91.2	4	<b>345</b>	<b>95.6</b>	345	95.6	362	91.2
459.GemsFDTD	4	<b>1124</b>	<b>37.6</b>	1121	38.0	1124	37.6	4	<b>1124</b>	<b>37.6</b>	1121	38.0	1124	37.6
465.tonto	4	544	72.4	538	73.2	<b>540</b>	<b>72.8</b>	4	530	74.4	<b>529</b>	<b>74.4</b>	527	74.8
470.lbm	4	616	89.2	<b>615</b>	<b>89.2</b>	614	89.6	4	616	89.2	<b>615</b>	<b>89.2</b>	614	89.6
481.wrf	4	580	77.2	<b>581</b>	<b>76.8</b>	581	76.8	4	580	77.2	<b>581</b>	<b>76.8</b>	581	76.8
482.sphinx3	4	1294	60.4	<b>1297</b>	<b>60.0</b>	1298	60.0	4	1294	60.4	<b>1297</b>	<b>60.0</b>	1298	60.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler 16.0 was set up to generate 64-bit binaries with the command:

"psxevars.bat intel64" (shortcut provided in the Intel(r) Parallel Studio XE 2016 program folder)

## Platform Notes

Sysinfo program C:\SPEC16.0\Docs\sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\\$ \8787f7622badcf24e01c368b1db4377c  
running on Clt1C872C5DF572 Sun Jul 3 06:46:25 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7800 with  
Radeon R7 Graphics)

**SPECfp\_rate2006 = 69.2**

**SPECfp\_rate\_base2006 = 68.6**

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2016

Hardware Availability: Jul-2014

Software Availability: Aug-2015

## Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name      : Microsoft Windows 7 Ultimate
OS Version   : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model  : System Product Name
Processor(s)  : 1 Processor(s) Installed.
                 [01]: AMD64 Family 21 Model 48 Stepping 1 AuthenticAMD ~3500 Mhz
BIOS Version  : American Megatrends Inc. 2502, 12/11/2015
Total Physical Memory: 7,108 MB
```

```
Trying 'wmic cpu get /value'
DeviceID     : CPU0
L2CacheSize  : 25359
L3CacheSize  : 0
MaxClockSpeed: 3500
Name         : AMD A10-7800 Radeon R7, 12 Compute Cores 4C+8G
NumberOfCores: 2
NumberOfLogicalProcessors: 4
```

(End of data from sysinfo program)

## Component Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply

## General Notes

450.soplex (peak): "getline\_test" src.alt was used.

447.dealII (base): "max\_prototype" src.alt was used.

447.dealII (base): "cxxl1\_make\_pair" src.alt was used.

450.soplex (base): "getline\_test" src.alt was used.

447.dealII (base): "max\_prototype" src.alt was used.

447.dealII (base): "cxxl1\_make\_pair" src.alt was used.

Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU  
+ 64GB memory using Windows 8.1 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:

icl -Qvc12 -Qstd=c99

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7800 with  
Radeon R7 Graphics)

**SPECfp\_rate2006 = 69.2**

**SPECfp\_rate\_base2006 = 68.6**

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Jul-2016

**Hardware Availability:** Jul-2014

**Software Availability:** Aug-2015

## Base Compiler Invocation (Continued)

C++ benchmarks:

  icl -Qvc12

Fortran benchmarks:

  ifort

Benchmarks using both Fortran and C:

  icl -Qvc12 -Qstd=c99 ifort

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64
416.games: -DSPEC_CPU_P64
    433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
    444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
    -DSPEC_CPU_BOOST_CONFIG_MSC_VER -DSPEC_NEED_ALGORITHM
450.soplex: -DSPEC_CPU_P64 -DSPEC_GETLINE_TEST
453.povray: -DSPEC_CPU_P64
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
    470.lbm: -DSPEC_CPU_P64
        481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

## Base Optimization Flags

C benchmarks:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F100000000000           -link /FORCE:MULTIPLE

```

C++ benchmarks:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F100000000000 shlw64M.lib
    -link /FORCE:MULTIPLE

```

Fortran benchmarks:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F100000000000           -link /FORCE:MULTIPLE

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7800 with  
Radeon R7 Graphics)

**SPECfp\_rate2006 = 69.2**

**SPECfp\_rate\_base2006 = 68.6**

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2016

Hardware Availability: Jul-2014

Software Availability: Aug-2015

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE
```

## Peak Compiler Invocation

C benchmarks:

```
icl -Qvc12 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc12
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc12 -Qstd=c99 ifort
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000  
shlw64M.lib -link /FORCE:MULTIPLE
```

```
447.dealII: basepeak = yes
```

```
450.soplex: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlw64M.lib  
-link /FORCE:MULTIPLE
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7800 with  
Radeon R7 Graphics)

**SPECfp\_rate2006 = 69.2**

**SPECfp\_rate\_base2006 = 68.6**

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2016

Hardware Availability: Jul-2014

Software Availability: Aug-2015

## Peak Optimization Flags (Continued)

```
453.povray: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
             -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
             /F100000000000 shlw64M.lib           -link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
416.gamess: basepeak = yes
434.zeusmp: basepeak = yes
437.leslie3d: basepeak = yes
459.GemsFDTD: basepeak = yes
465.tonto: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
             -Qipo -O3 -Qprec-div- -Qunroll14 -Qauto /F100000000000
             -link /FORCE:MULTIPLE
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes
436.cactusADM: basepeak = yes
454.calculix: basepeak = yes
481.wrf: basepeak = yes
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 20 15:06:57 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 September 2016.