



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>\_rate2006 = 1140

Huawei RH2288H V3 (Intel Xeon E5-2699 v4)

SPECfp\_rate\_base2006 = 1110

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Apr-2016

Software Availability: Mar-2016

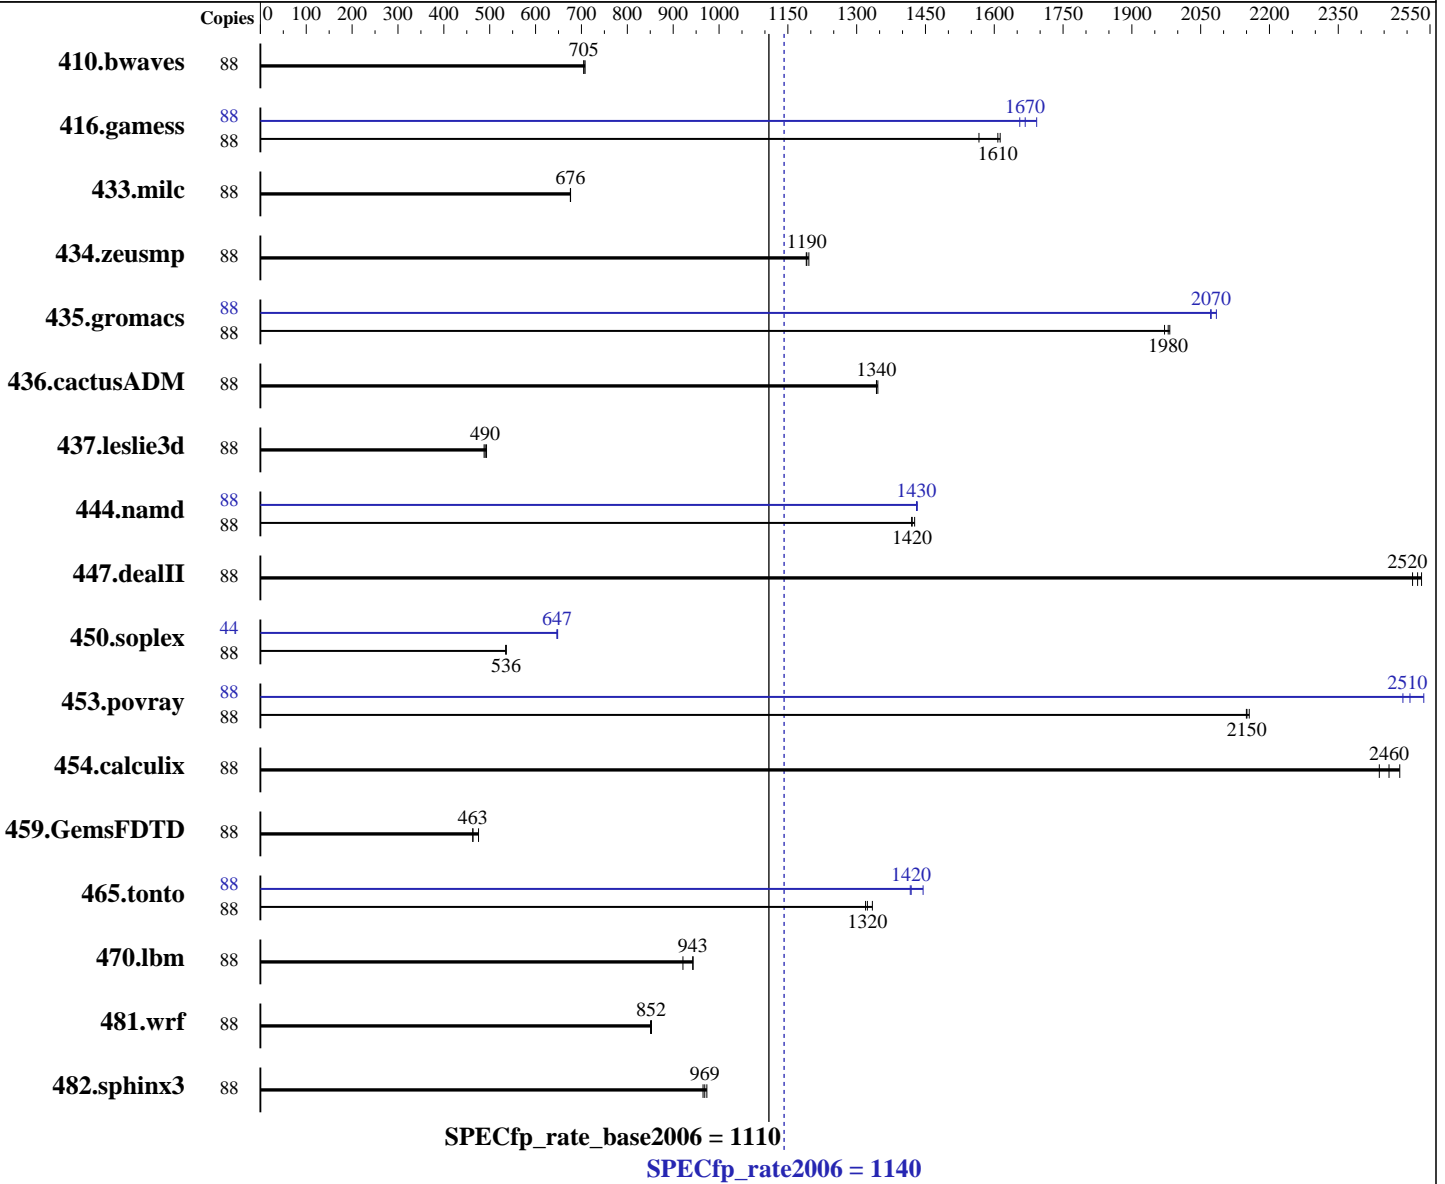

### Hardware

CPU Name: Intel Xeon E5-2699 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 44 cores, 2 chips, 22 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = 1140

Huawei RH2288H V3 (Intel Xeon E5-2699 v4)

SPECfp\_rate\_base2006 = 1110

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Apr-2016

Software Availability: Mar-2016

L3 Cache: 55 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R)  
 Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	88	1696	705	<b>1696</b>	<b>705</b>	1689	708	88	1696	705	<b>1696</b>	<b>705</b>	1689	708
416.gamess	88	<b>1072</b>	<b>1610</b>	1100	1570	1068	1610	88	<b>1033</b>	<b>1670</b>	1018	1690	1041	1660
433.milc	88	<b>1195</b>	<b>676</b>	1195	676	1195	676	88	<b>1195</b>	<b>676</b>	1195	676	1195	676
434.zeusmp	88	673	1190	670	1200	<b>672</b>	<b>1190</b>	88	673	1190	670	1200	<b>672</b>	<b>1190</b>
435.gromacs	88	317	1980	319	1970	<b>317</b>	<b>1980</b>	88	301	2080	303	2070	<b>303</b>	<b>2070</b>
436.cactusADM	88	783	1340	<b>783</b>	<b>1340</b>	781	1350	88	783	1340	<b>783</b>	<b>1340</b>	781	1350
437.leslie3d	88	1696	488	<b>1687</b>	<b>490</b>	1678	493	88	1696	488	<b>1687</b>	<b>490</b>	1678	493
444.namd	88	495	1430	<b>497</b>	<b>1420</b>	497	1420	88	493	1430	493	1430	<b>493</b>	<b>1430</b>
447.dealII	88	398	2530	401	2510	<b>399</b>	<b>2520</b>	88	398	2530	401	2510	<b>399</b>	<b>2520</b>
450.soplex	88	1370	536	<b>1370</b>	<b>536</b>	1372	535	44	566	648	<b>567</b>	<b>647</b>	567	647
453.povray	88	218	2150	217	2160	<b>218</b>	<b>2150</b>	88	185	2540	188	2490	<b>187</b>	<b>2510</b>
454.calculix	88	<b>295</b>	<b>2460</b>	292	2480	298	2440	88	<b>295</b>	<b>2460</b>	292	2480	298	2440
459.GemsFDTD	88	<b>2015</b>	<b>463</b>	2016	463	1963	476	88	<b>2015</b>	<b>463</b>	2016	463	1963	476
465.tonto	88	<b>654</b>	<b>1320</b>	656	1320	649	1330	88	611	1420	599	1440	<b>610</b>	<b>1420</b>
470.lbm	88	1312	921	1282	943	<b>1283</b>	<b>943</b>	88	1312	921	1282	943	<b>1283</b>	<b>943</b>
481.wrf	88	<b>1153</b>	<b>852</b>	1153	853	1156	851	88	<b>1153</b>	<b>852</b>	1153	853	1156	851
482.sphinx3	88	<b>1770</b>	<b>969</b>	1762	973	1777	965	88	<b>1770</b>	<b>969</b>	1762	973	1777	965

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Set Snoop Mode to COD mode

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = 1140

Huawei RH2288H V3 (Intel Xeon E5-2699 v4)

SPECfp\_rate\_base2006 = 1110

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Apr-2016

Software Availability: Mar-2016

### Platform Notes (Continued)

```
Set Patrol Scrub to Disable
Sysinfo program /spec16/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Mon Oct 17 22:07:06 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz
 2 "physical id"s (chips)
 88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 22
siblings  : 44
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
cache size : 28160 KB
```

```
From /proc/meminfo
MemTotal:      263560548 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 13 18:28

```
SPEC is set to: /spec16
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   254G  9.5G  245G   4% /
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1140

Huawei RH2288H V3 (Intel Xeon E5-2699 v4)

SPECfp\_rate\_base2006 = 1110

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Apr-2016

Software Availability: Mar-2016

## Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 3.12 03/03/2016

Memory:

8x Micron 18ASF2G72PDZ-2G3B1 16 GB 1 rank 2400 MHz  
8x Micron 18ASF2G72PDZ-2G3B1 16 GB 2 rank 2400 MHz  
8x NO DIMM NO DIMM 3 rank

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/spec16/libs/32:/spec16/libs/64:/spec16/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1140

Huawei RH2288H V3 (Intel Xeon E5-2699 v4)

SPECfp\_rate\_base2006 = 1110

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Oct-2016  
Hardware Availability: Apr-2016  
Software Availability: Mar-2016

## Base Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks (except as noted below):  
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Fortran benchmarks:  
ifort -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1140

Huawei RH2288H V3 (Intel Xeon E5-2699 v4)

SPECfp\_rate\_base2006 = 1110

CPU2006 license: 3175

Test date: Oct-2016

Test sponsor: Huawei

Hardware Availability: Apr-2016

Tested by: Huawei

Software Availability: Mar-2016

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1140

Huawei RH2288H V3 (Intel Xeon E5-2699 v4)

SPECfp\_rate\_base2006 = 1110

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Apr-2016

Software Availability: Mar-2016

## Peak Optimization Flags (Continued)

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1140

Huawei RH2288H V3 (Intel Xeon E5-2699 v4)

SPECfp\_rate\_base2006 = 1110

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Apr-2016

Software Availability: Mar-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Nov 15 16:05:40 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 November 2016.