



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECfp[®]_rate2006 = 950

SPECfp_rate_base2006 = 924

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

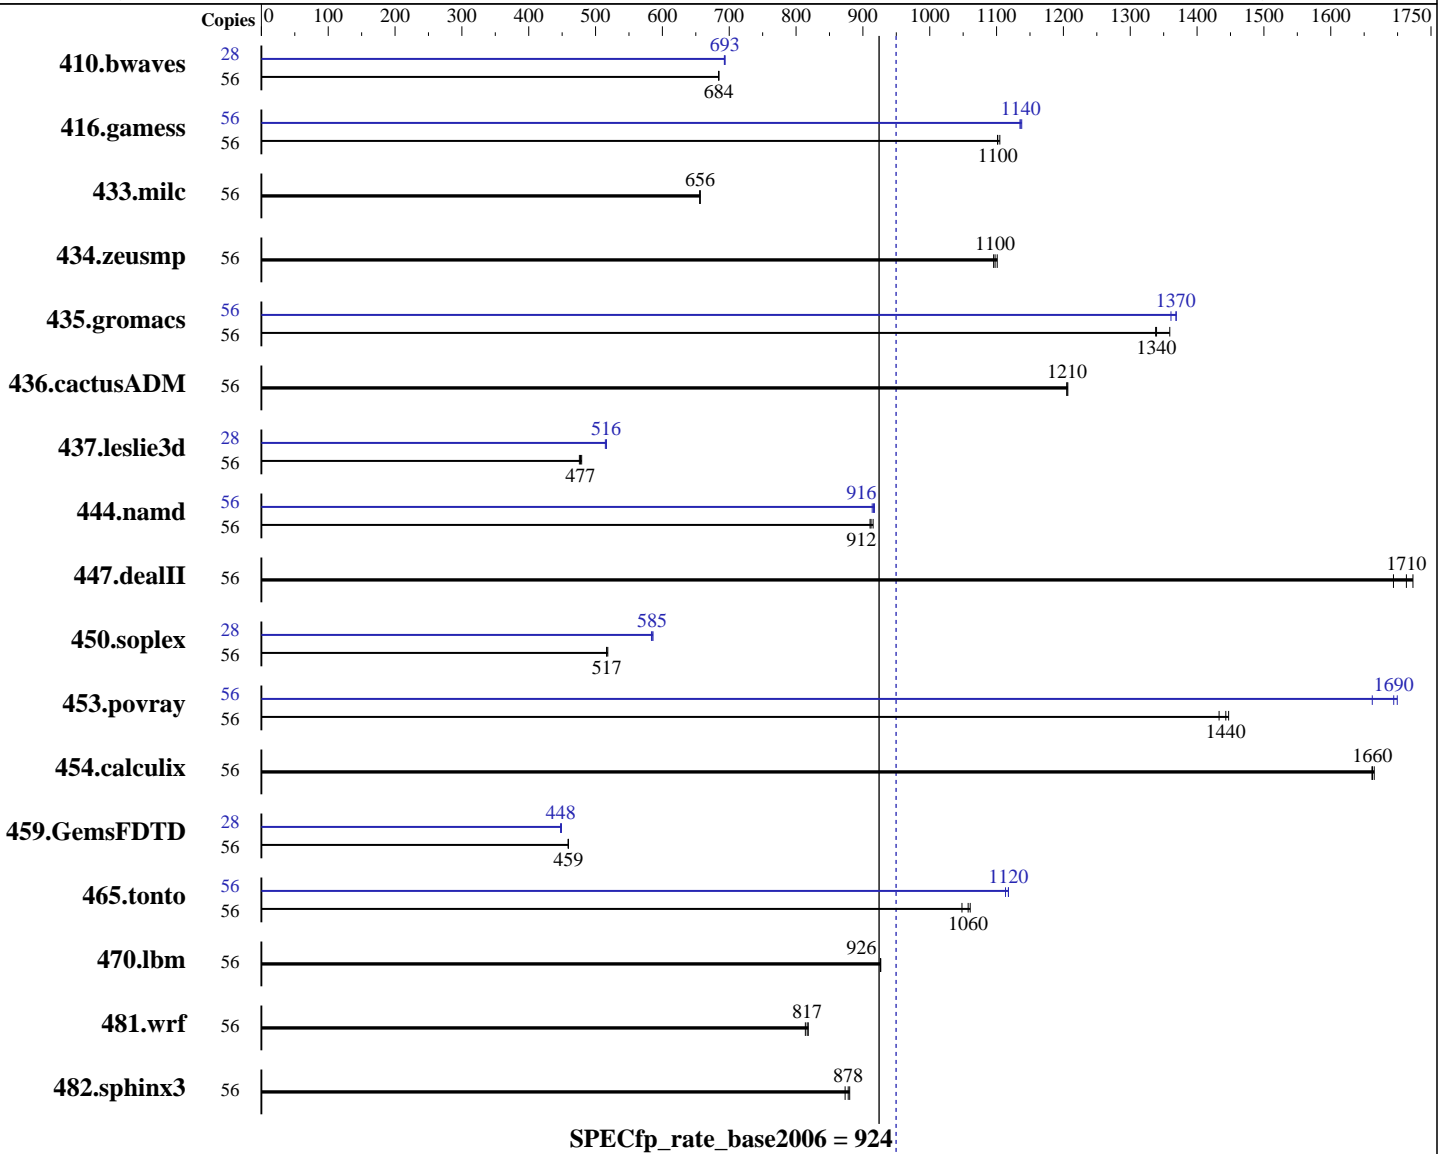

Hardware

CPU Name: Intel Xeon E5-2680 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 3.10.0-327.18.2.el7.x86_64
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECfp_rate2006 = 950

SPECfp_rate_base2006 = 924

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 240 GB SATA II SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1112	684	<u>1112</u>	<u>684</u>	1112	684	28	549	694	549	693	<u>549</u>	<u>693</u>
416.gamess	56	<u>995</u>	<u>1100</u>	992	1100	996	1100	56	<u>965</u>	<u>1140</u>	964	1140	966	1140
433.milc	56	784	656	783	657	<u>783</u>	<u>656</u>	56	784	656	783	657	<u>783</u>	<u>656</u>
434.zeusmp	56	463	1100	465	1100	<u>464</u>	<u>1100</u>	56	463	1100	465	1100	<u>464</u>	<u>1100</u>
435.gromacs	56	<u>299</u>	<u>1340</u>	294	1360	299	1340	56	292	1370	<u>292</u>	<u>1370</u>	294	1360
436.cactusADM	56	555	1210	555	1210	<u>555</u>	<u>1210</u>	56	555	1210	555	1210	<u>555</u>	<u>1210</u>
437.leslie3d	56	1106	476	1098	479	<u>1102</u>	<u>477</u>	28	510	516	511	515	<u>510</u>	<u>516</u>
444.namd	56	491	915	<u>492</u>	<u>912</u>	493	911	56	491	914	<u>490</u>	<u>916</u>	490	917
447.dealII	56	378	1690	372	1720	<u>374</u>	<u>1710</u>	56	378	1690	372	1720	<u>374</u>	<u>1710</u>
450.soplex	56	<u>904</u>	<u>517</u>	901	518	904	517	28	398	586	<u>399</u>	<u>585</u>	400	584
453.povray	56	<u>206</u>	<u>1440</u>	208	1430	206	1450	56	175	1700	179	1660	<u>176</u>	<u>1690</u>
454.calculix	56	<u>278</u>	<u>1660</u>	277	1670	278	1660	56	<u>278</u>	<u>1660</u>	277	1670	278	1660
459.GemsFDTD	56	1293	459	1295	459	<u>1293</u>	<u>459</u>	28	662	449	<u>663</u>	<u>448</u>	664	448
465.tonto	56	520	1060	<u>521</u>	<u>1060</u>	526	1050	56	493	1120	<u>493</u>	<u>1120</u>	495	1110
470.lbm	56	830	927	<u>831</u>	<u>926</u>	831	926	56	830	927	<u>831</u>	<u>926</u>	831	926
481.wrf	56	769	814	<u>766</u>	<u>817</u>	764	818	56	769	814	<u>766</u>	<u>817</u>	764	818
482.sphinx3	56	<u>1243</u>	<u>878</u>	1250	873	1240	880	56	<u>1243</u>	<u>878</u>	1250	873	1240	880

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings:
Intel(R) Hyper-Threading Tech = Enabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECfp_rate2006 = 950

SPECfp_rate_base2006 = 924

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

Platform Notes (Continued)

Power & Performance = Performance
Enforce POR = Disabled
Memory Operating Speed Selection = 2400
Cluster-on-Die = Enabled
Set FAN Profile = Performance
Fan PWM Offset = 0

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on SUT Thu Jan 7 08:01:09 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2680 v4 @ 2.40GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 14
  siblings      : 28
  physical 0:   cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 1:   cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size     : 17920 KB
```

```
From /proc/meminfo
MemTotal:      263860272 kB
HugePages_Total: 1
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
os-release.rpmsave:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECfp_rate2006 = 950

SPECfp_rate_base2006 = 924

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

Platform Notes (Continued)

```
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux SUT 3.10.0-327.18.2.el7.x86_64 #2 SMP Wed Jun 1 17:37:13 CEST 2016
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 5 15:24
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1       ext4  212G   45G  157G  23% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C610.86B.01.01.0019.101220160604 10/12/2016

Memory:

```
16x Hynix HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)

dmidecode does not properly detect memory modules

16 modules of 16 GB were used to run the test (256 GB total)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECfp_rate2006 = 950

SPECfp_rate_base2006 = 924

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECfp_rate2006 = 950

SPECfp_rate_base2006 = 924

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 950

ACTINA SOLAR 220 X6 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECfp_rate_base2006 = 924

CPU2006 license: 9008

Test date: Jan-2016

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

Peak Optimization Flags (Continued)

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-malloc-options=3
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECfp_rate2006 = 950

SPECfp_rate_base2006 = 924

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jan 25 10:54:14 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 January 2017.