



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp[®]_rate2006 = 1120

Lenovo ThinkServer RD550
(2.20 GHz, Intel Xeon E5-2699R v4)

SPECfp_rate_base2006 = 1090

CPU2006 license: 9017


Test date: Dec-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2017

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

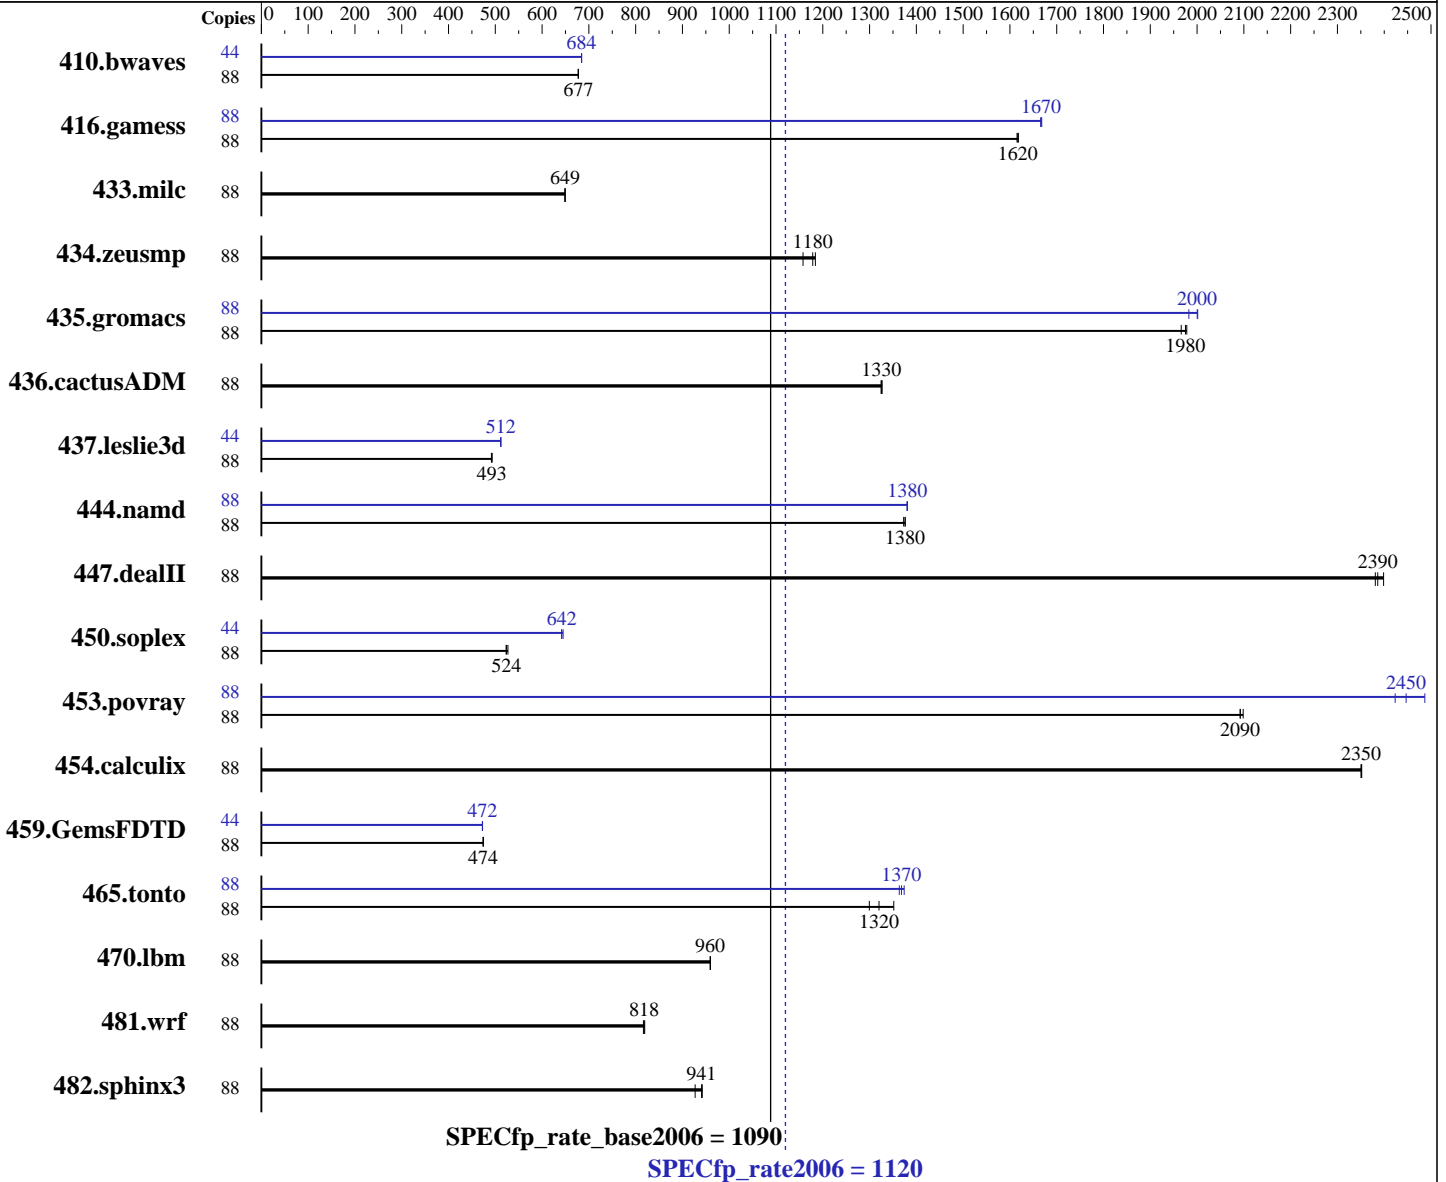

Hardware

CPU Name: Intel Xeon E5-2699R v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 44 cores, 2 chips, 22 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
 Kernel 3.12.49-11-default
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 1120

Lenovo ThinkServer RD550
(2.20 GHz, Intel Xeon E5-2699R v4)

SPECfp_rate_base2006 = 1090

CPU2006 license: 9017

Test date: Dec-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2017

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

L3 Cache: 55 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	88	1765	678	<u>1765</u>	<u>677</u>	1766	677	44	<u>874</u>	<u>684</u>	874	684	874	684
416.gamess	88	1067	1620	<u>1066</u>	<u>1620</u>	1065	1620	88	<u>1034</u>	<u>1670</u>	1034	1670	1033	1670
433.milc	88	<u>1245</u>	<u>649</u>	1244	649	1245	649	88	<u>1245</u>	<u>649</u>	1244	649	1245	649
434.zeusmp	88	<u>680</u>	<u>1180</u>	676	1180	692	1160	88	<u>680</u>	<u>1180</u>	676	1180	692	1160
435.gromacs	88	318	1980	320	1970	<u>318</u>	<u>1980</u>	88	<u>314</u>	<u>2000</u>	317	1980	314	2000
436.cactusADM	88	793	1330	<u>794</u>	<u>1330</u>	794	1320	88	793	1330	<u>794</u>	<u>1330</u>	794	1320
437.leslie3d	88	1677	493	1682	492	<u>1679</u>	<u>493</u>	44	808	512	808	512	<u>808</u>	<u>512</u>
444.namd	88	513	1380	<u>513</u>	<u>1380</u>	514	1370	88	511	1380	<u>511</u>	<u>1380</u>	511	1380
447.dealII	88	<u>422</u>	<u>2390</u>	423	2380	420	2400	88	<u>422</u>	<u>2390</u>	423	2380	420	2400
450.soplex	88	<u>1400</u>	<u>524</u>	1403	523	1393	527	44	569	645	572	642	<u>572</u>	<u>642</u>
453.povray	88	<u>224</u>	<u>2090</u>	223	2100	224	2090	88	<u>191</u>	<u>2450</u>	193	2420	188	2490
454.calculix	88	309	2350	309	2350	<u>309</u>	<u>2350</u>	88	309	2350	309	2350	<u>309</u>	<u>2350</u>
459.GemsFDTD	88	<u>1969</u>	<u>474</u>	1970	474	1967	475	44	988	473	<u>988</u>	<u>472</u>	988	472
465.tonto	88	641	1350	<u>656</u>	<u>1320</u>	666	1300	88	630	1370	635	1360	<u>633</u>	<u>1370</u>
470.lbm	88	<u>1260</u>	<u>960</u>	1260	960	1260	959	88	<u>1260</u>	<u>960</u>	1260	960	1260	959
481.wrf	88	<u>1202</u>	<u>818</u>	1200	819	1204	817	88	<u>1202</u>	<u>818</u>	1200	819	1204	817
482.sphinx3	88	1850	927	<u>1823</u>	<u>941</u>	1820	942	88	1850	927	<u>1823</u>	<u>941</u>	1820	942

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 1120

Lenovo ThinkServer RD550
(2.20 GHz, Intel Xeon E5-2699R v4)

SPECfp_rate_base2006 = 1090

CPU2006 license: 9017

Test date: Dec-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2017

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Platform Notes

BIOS Configuration:

```

Cluster On Die set to Enabled
Early Snoop set to Disabled
Performance Profile set to Custom
ClE Support set to Disabled
Core C3 set to Disabled
Core C6 set to Disabled
CPU Performance and Energy Bias set to Disabled
Thermal Profile set to High Fan Speed
Memory Power Savings set to Disabled
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on RD550-02 Sat Dec 3 03:50:28 2016

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) CPU E5-2699R v4 @ 2.20GHz
 2 "physical id"s (chips)
 88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 22
  siblings  : 44
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
 28
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
 28
cache size : 28160 KB

```

From /proc/meminfo

```

MemTotal:      264551928 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 1120

Lenovo ThinkServer RD550
(2.20 GHz, Intel Xeon E5-2699R v4)

SPECfp_rate_base2006 = 1090

CPU2006 license: 9017

Test date: Dec-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2017

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Platform Notes (Continued)

```
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux RD550-02 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 2 15:52
```

```
SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   689G  17G  672G   3% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO PB1TS362 03/24/2016

Memory:

16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz
8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 1120

Lenovo ThinkServer RD550
(2.20 GHz, Intel Xeon E5-2699R v4)

SPECfp_rate_base2006 = 1090

CPU2006 license: 9017

Test date: Dec-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2017

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 1120

Lenovo ThinkServer RD550
(2.20 GHz, Intel Xeon E5-2699R v4)

SPECfp_rate_base2006 = 1090

CPU2006 license: 9017

Test date: Dec-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2017

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -fno-alias -auto-ilp32
 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 1120

Lenovo ThinkServer RD550
(2.20 GHz, Intel Xeon E5-2699R v4)

SPECfp_rate_base2006 = 1090

CPU2006 license: 9017

Test date: Dec-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2017

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-malloc-options=3
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 1120

Lenovo ThinkServer RD550
(2.20 GHz, Intel Xeon E5-2699R v4)

SPECfp_rate_base2006 = 1090

CPU2006 license: 9017

Test date: Dec-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2017

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 7 17:00:49 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 February 2017.