



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp[®]_rate2006 = 192

Express5800/R110i-1 (Intel Xeon E3-1260L v5)

SPECfp_rate_base2006 = 186

CPU2006 license: 9006


Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

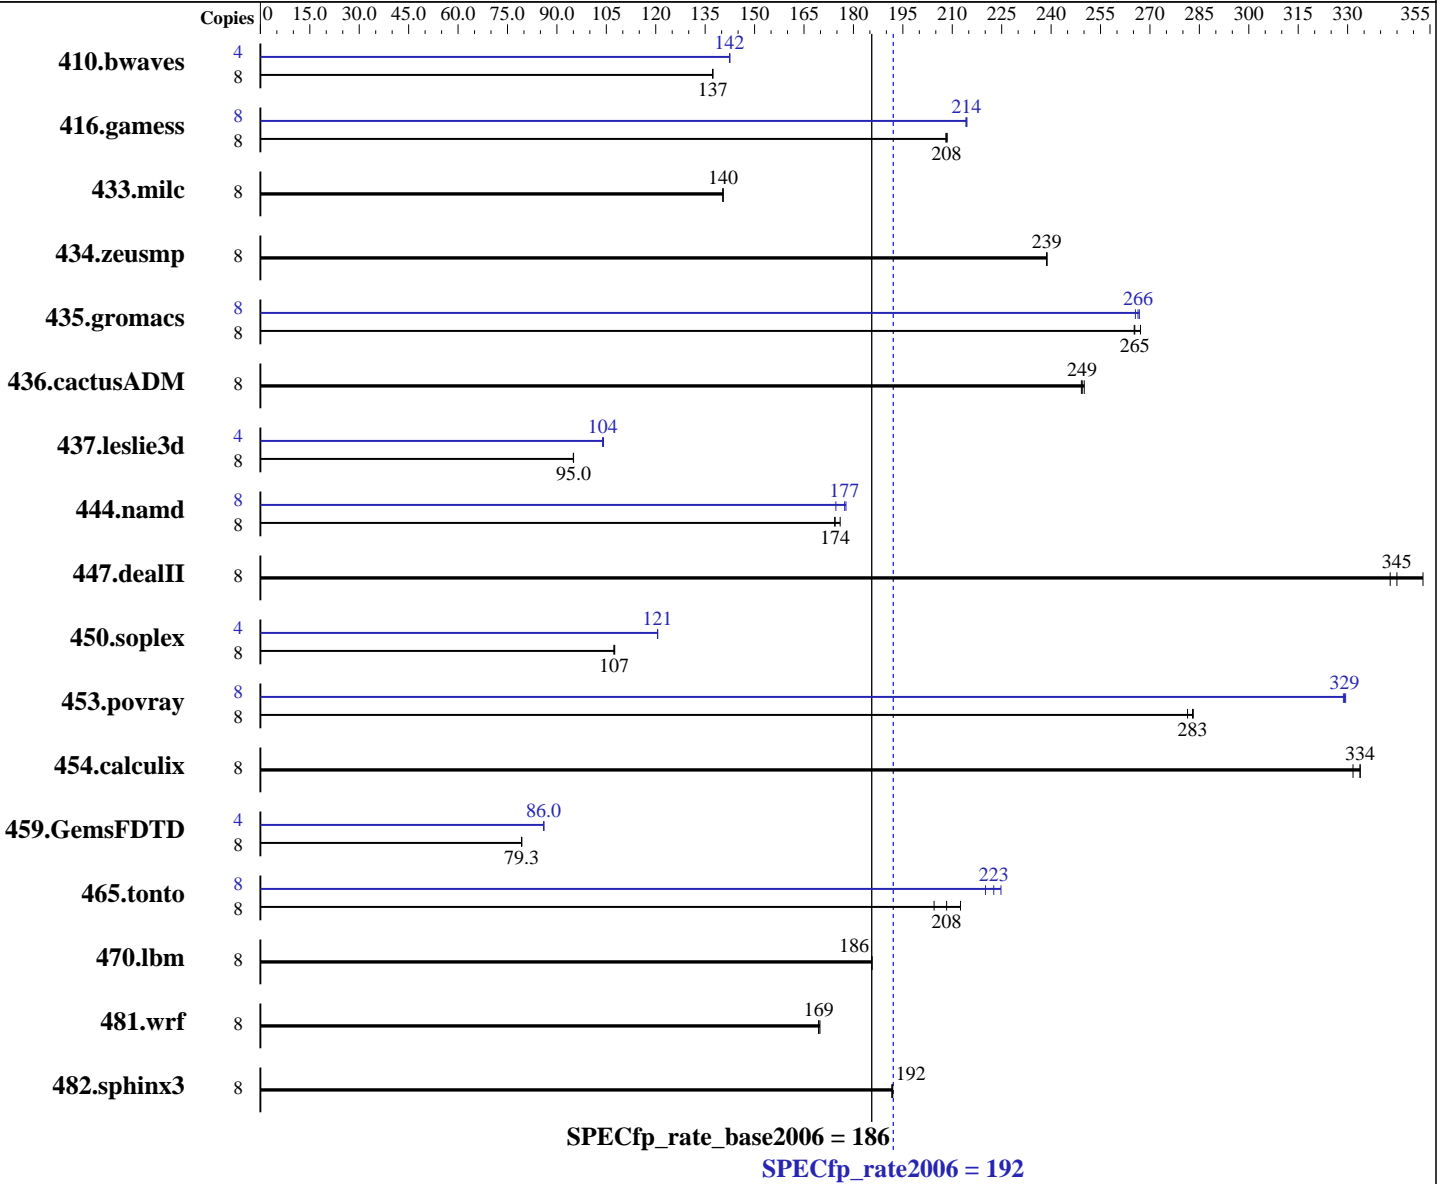

Hardware

CPU Name: Intel Xeon E3-1260L v5
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 Kernel 3.10.0-514.6.1.el7.x86_64
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 192

Express5800/R110i-1 (Intel Xeon E3-1260L v5)

SPECfp_rate_base2006 = 186

CPU2006 license: 9006

Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (2 x 16 GB 2Rx8 PC4-2400T-E, running at 2133 MHz)
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	792	137	792	137	792	137	4	382	142	381	143	382	142		
416.gamess	8	752	208	753	208	751	208	8	731	214	730	214	731	214		
433.milc	8	523	140	523	140	523	140	8	523	140	523	140	523	140		
434.zeusmp	8	305	239	305	239	305	239	8	305	239	305	239	305	239		
435.gromacs	8	214	267	215	265	215	265	8	214	266	214	267	215	266		
436.cactusADM	8	382	250	384	249	383	249	8	382	250	384	249	383	249		
437.leslie3d	8	791	95.0	792	95.0	791	95.1	4	362	104	362	104	361	104		
444.namd	8	365	176	368	174	368	174	8	362	177	361	178	367	175		
447.dealII	8	267	343	265	345	259	353	8	267	343	265	345	259	353		
450.soplex	8	620	108	621	107	621	107	4	277	121	277	121	277	121		
453.povray	8	150	283	151	281	150	283	8	129	329	129	329	129	329		
454.calculix	8	198	334	198	334	199	332	8	198	334	198	334	199	332		
459.GemsFDTD	8	1071	79.3	1071	79.3	1070	79.3	4	493	86.1	493	86.0	494	86.0		
465.tonto	8	378	208	385	204	370	212	8	354	223	350	225	358	220		
470.lbm	8	592	186	592	186	592	186	8	592	186	592	186	592	186		
481.wrf	8	527	169	527	169	526	170	8	527	169	527	169	526	170		
482.sphinx3	8	812	192	813	192	814	192	8	812	192	813	192	814	192		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 192

Express5800/R110i-1 (Intel Xeon E3-1260L v5)

SPECfp_rate_base2006 = 186

CPU2006 license: 9006

Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

Platform Notes

BIOS Settings:

Power Management Policy: Custom
Energy Performance: Performance
DCU Streamer Prefetcher: Disabled

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 192

Express5800/R110i-1 (Intel Xeon E3-1260L v5)

SPECfp_rate_base2006 = 186

CPU2006 license: 9006

Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 192

Express5800/R110i-1 (Intel Xeon E3-1260L v5)

SPECfp_rate_base2006 = 186

CPU2006 license: 9006

Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

Peak Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
         -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -fno-alias -auto-ilp32
         -qopt-mem-layout-trans=3

```

447.deallI: basepeak = yes

```

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -qopt-malloc-options=3
           -qopt-mem-layout-trans=3

```

```

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

```

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 192

Express5800/R110i-1 (Intel Xeon E3-1260L v5)

SPECfp_rate_base2006 = 186

CPU2006 license: 9006

Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 30 15:31:34 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 May 2017.