



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 284

Express5800/T110i-S (Intel Xeon E3-1270 v6)

SPECint_rate_base2006 = 273

CPU2006 license: 9006


Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

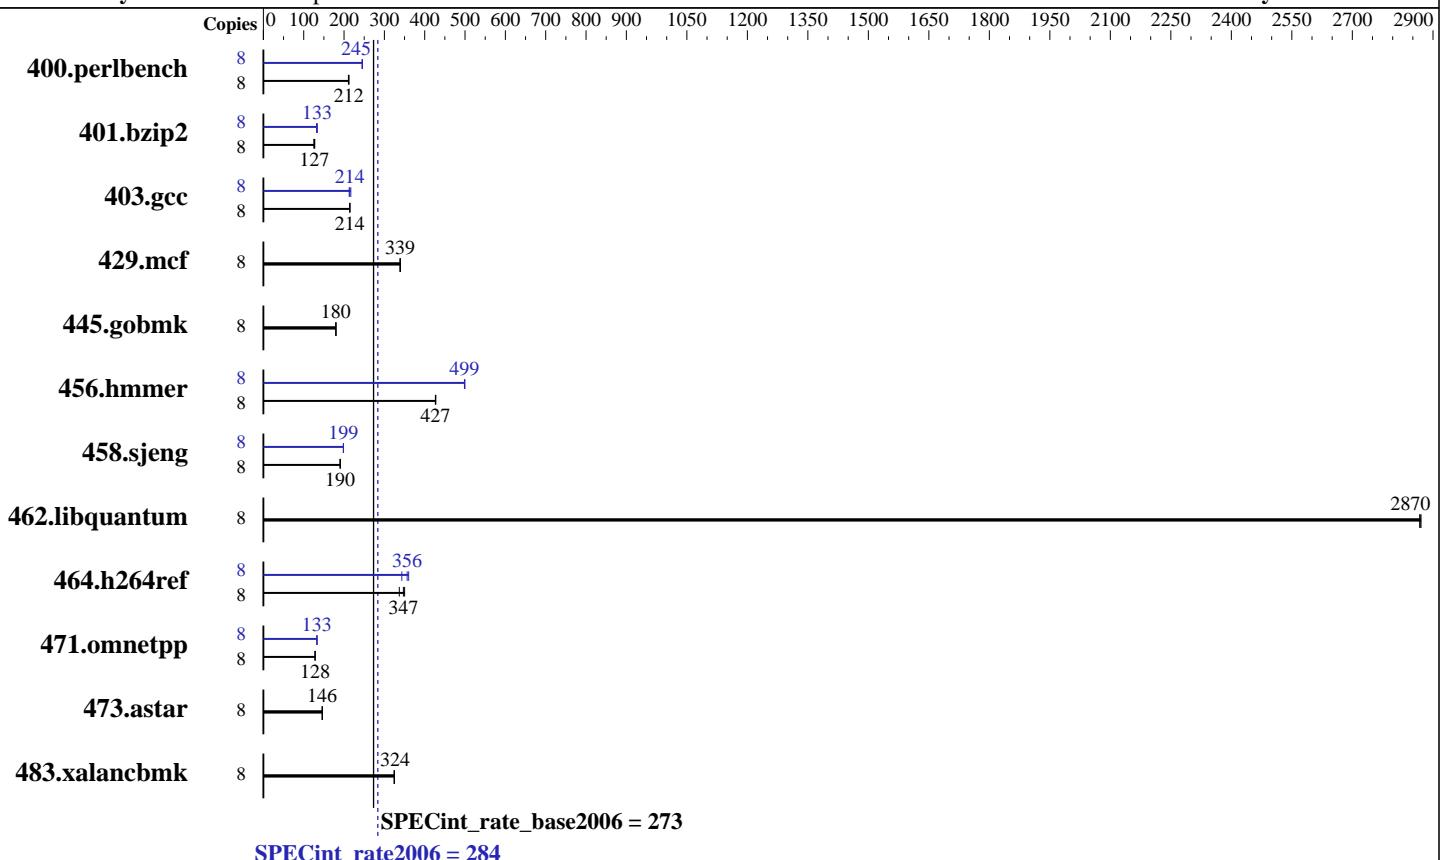

Hardware

CPU Name:	Intel Xeon E3-1270 v6
CPU Characteristics:	Intel Turbo Boost Technology up to 4.20 GHz
CPU MHz:	3800
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (2 x 16 GB 2Rx8 PC4-2400T-E)
Disk Subsystem:	1 x 1 TB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.3 (Maipo)
Compiler:	Kernel 3.10.0-514.6.1.el7.x86_64
Auto Parallel:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
File System:	No
System State:	ext4
Base Pointers:	Run level 3 (multi-user)
Peak Pointers:	32-bit
Other Software:	32/64-bit
	Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110i-S (Intel Xeon E3-1270 v6)

SPECint_rate2006 = 284

SPECint_rate_base2006 = 273

CPU2006 license: 9006

Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	369	212	371	211	<u>369</u>	<u>212</u>	8	318	246	319	245	<u>319</u>	<u>245</u>
401.bzip2	8	606	127	618	125	<u>609</u>	<u>127</u>	8	579	133	<u>580</u>	<u>133</u>	586	132
403.gcc	8	301	214	<u>301</u>	<u>214</u>	300	214	8	303	213	<u>301</u>	<u>214</u>	297	217
429.mcf	8	215	340	<u>215</u>	<u>339</u>	215	339	8	215	340	<u>215</u>	<u>339</u>	215	339
445.gobmk	8	467	180	467	180	<u>467</u>	<u>180</u>	8	467	180	467	180	<u>467</u>	<u>180</u>
456.hammer	8	175	427	175	426	<u>175</u>	<u>427</u>	8	150	499	149	500	<u>150</u>	<u>499</u>
458.sjeng	8	<u>508</u>	<u>190</u>	509	190	507	191	8	488	198	487	199	<u>488</u>	<u>199</u>
462.libquantum	8	<u>57.8</u>	<u>2870</u>	57.8	2870	57.7	2870	8	<u>57.8</u>	<u>2870</u>	57.8	2870	<u>57.7</u>	2870
464.h264ref	8	<u>510</u>	<u>347</u>	525	337	505	350	8	<u>497</u>	<u>356</u>	491	360	<u>516</u>	343
471.omnetpp	8	<u>390</u>	<u>128</u>	390	128	390	128	8	<u>377</u>	<u>133</u>	376	133	<u>377</u>	133
473.astar	8	384	146	385	146	<u>384</u>	<u>146</u>	8	384	146	385	146	<u>384</u>	<u>146</u>
483.xalancbmk	8	<u>170</u>	<u>324</u>	170	324	170	325	8	<u>170</u>	<u>324</u>	170	324	170	325

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Power Management Policy: Custom
Energy Performance: Performance
DCU Streamer Prefetcher: Disabled

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110i-S (Intel Xeon E3-1270 v6)

SPECint_rate2006 = 284

SPECint_rate_base2006 = 273

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2017

Hardware Availability: Apr-2017

Software Availability: Jan-2017

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -D_FILE_OFFSET_BITS=64
```

```
403.gcc: -D_FILE_OFFSET_BITS=64
```

```
429.mcf: -D_FILE_OFFSET_BITS=64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmr: -D_FILE_OFFSET_BITS=64
```

```
458.sjeng: -D_FILE_OFFSET_BITS=64
```

```
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -D_FILE_OFFSET_BITS=64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -D_FILE_OFFSET_BITS=64
```

```
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110i-S (Intel Xeon E3-1270 v6)

SPECint_rate2006 = 284

SPECint_rate_base2006 = 273

CPU2006 license: 9006

Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-D_FILE_OFFSET_BITS=64`

429.mcf: `-D_FILE_OFFSET_BITS=64`

445.gobmk: `-D_FILE_OFFSET_BITS=64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

464.h264ref: `-D_FILE_OFFSET_BITS=64`

471.omnetpp: `-D_FILE_OFFSET_BITS=64`

473.astar: `-D_FILE_OFFSET_BITS=64`

483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3`

401.bzip2: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3`

429.mcf: `basepeak = yes`

445.gobmk: `basepeak = yes`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110i-S (Intel Xeon E3-1270 v6)

SPECint_rate2006 = 284

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2017

Hardware Availability: Apr-2017

Software Availability: Jan-2017

Peak Optimization Flags (Continued)

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll14 -auto-ilp32
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll12 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)
-qopt-ra-region-strategy=block
-qopt-mem-layout-trans=3 -Wl,-z,muldefs
-L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.xml>



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110i-S (Intel Xeon E3-1270 v6)

SPECint_rate2006 = 284

SPECint_rate_base2006 = 273

CPU2006 license: 9006

Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 30 15:31:55 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 May 2017.