



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1140

Huawei XH321 V3 (Intel Xeon E5-2699A v4)

SPECfp_rate_base2006 = 1120

CPU2006 license: 3175


Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Apr-2016

Tested by: Huawei

Software Availability: Sep-2016

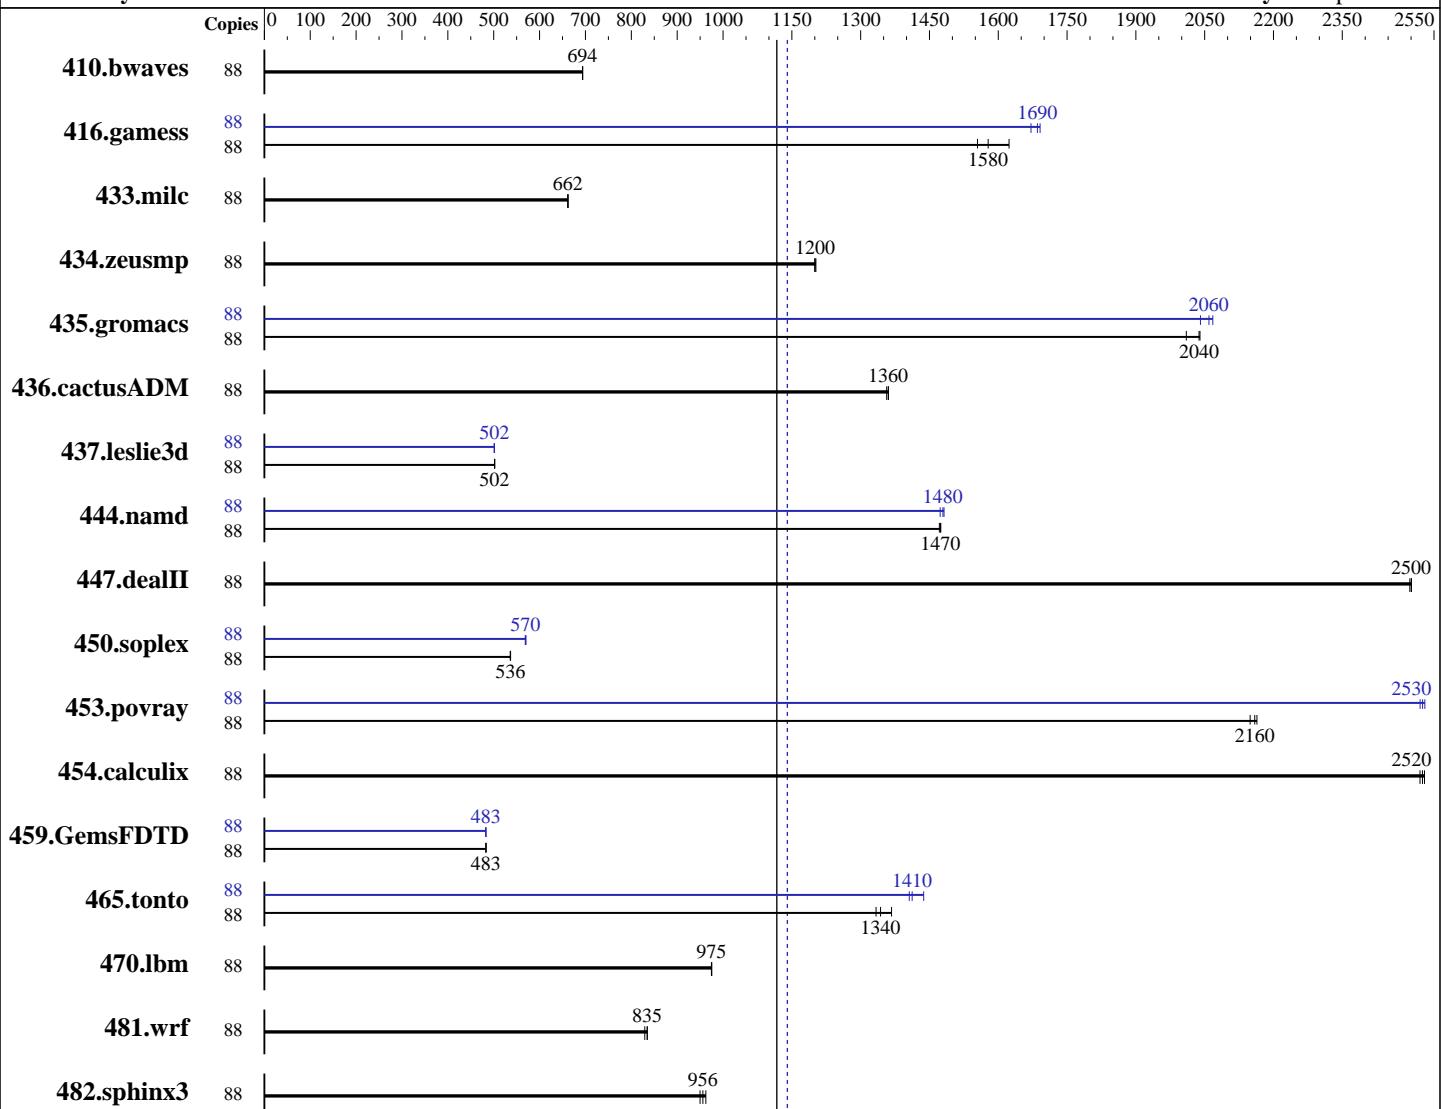

SPECfp_rate_base2006 = 1120

SPECfp_rate2006 = 1140

Hardware

CPU Name: Intel Xeon E5-2699A v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 44 cores, 2 chips, 22 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Compiler: 3.10.0-327.el7.x86_64
 C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Auto Parallel: No
 File System: xfs

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1140

Huawei XH321 V3 (Intel Xeon E5-2699A v4)

SPECfp_rate_base2006 = 1120

CPU2006 license: 3175

Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Apr-2016

Tested by: Huawei

Software Availability: Sep-2016

L3 Cache: 55 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R)
 Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	88	1723	694	<u>1724</u>	<u>694</u>	1724	694	88	1723	694	<u>1724</u>	<u>694</u>	1724	694
416.gamess	88	1061	1620	1108	1550	<u>1092</u>	<u>1580</u>	88	1031	1670	<u>1022</u>	<u>1690</u>	1019	1690
433.milc	88	1220	662	<u>1221</u>	<u>662</u>	1221	662	88	1220	662	<u>1221</u>	<u>662</u>	1221	662
434.zeusmp	88	<u>667</u>	<u>1200</u>	666	1200	667	1200	88	<u>667</u>	<u>1200</u>	666	1200	667	1200
435.gromacs	88	<u>308</u>	<u>2040</u>	313	2010	308	2040	88	308	2040	304	2070	<u>305</u>	<u>2060</u>
436.cactusADM	88	775	1360	773	1360	<u>773</u>	<u>1360</u>	88	775	1360	773	1360	<u>773</u>	<u>1360</u>
437.leslie3d	88	1648	502	<u>1648</u>	<u>502</u>	1648	502	88	<u>1649</u>	<u>502</u>	1649	502	1651	501
444.namd	88	<u>479</u>	<u>1470</u>	479	1470	480	1470	88	<u>477</u>	<u>1480</u>	476	1480	479	1470
447.dealII	88	<u>403</u>	<u>2500</u>	403	2500	403	2500	88	<u>403</u>	<u>2500</u>	403	2500	403	2500
450.soplex	88	<u>1369</u>	<u>536</u>	1369	536	1367	537	88	<u>1287</u>	<u>570</u>	1290	569	<u>1288</u>	<u>570</u>
453.povray	88	<u>217</u>	<u>2160</u>	216	2160	218	2150	88	185	2530	<u>185</u>	<u>2530</u>	186	2520
454.calculix	88	<u>288</u>	<u>2520</u>	288	2520	287	2530	88	<u>288</u>	<u>2520</u>	288	2520	287	2530
459.GemsFDTD	88	1933	483	1933	483	<u>1933</u>	<u>483</u>	88	1934	483	<u>1934</u>	<u>483</u>	1934	483
465.tonto	88	633	1370	649	1330	<u>645</u>	<u>1340</u>	88	<u>613</u>	<u>1410</u>	602	1440	616	1410
470.lbm	88	1241	975	1240	975	<u>1240</u>	<u>975</u>	88	1241	975	1240	975	<u>1240</u>	<u>975</u>
481.wrf	88	1185	829	<u>1178</u>	<u>835</u>	1177	835	88	1185	829	<u>1178</u>	<u>835</u>	1177	835
482.sphinx3	88	<u>1794</u>	<u>956</u>	1806	950	1782	962	88	<u>1794</u>	<u>956</u>	1806	950	1782	962

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Set Power Efficiency Mode to Performance
 Set Snoop Mode to COD mode

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1140

Huawei XH321 V3 (Intel Xeon E5-2699A v4)

SPECfp_rate_base2006 = 1120

CPU2006 license: 3175

Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Apr-2016

Tested by: Huawei

Software Availability: Sep-2016

Platform Notes (Continued)

Set Patrol Scrub to Disable
Sysinfo program /spec17/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on localhost.localdomain Wed May 10 00:19:12 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699A v4 @ 2.40GHz
        2 "physical id"s (chips)
        88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 22
    siblings   : 44
    physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
    28
    physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
    28
cache size : 28160 KB
```

```
From /proc/meminfo
MemTotal:      263560548 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.2 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.2"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 8 23:10
```

```
SPEC is set to: /spec17
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   254G   65G  189G  26% /
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

Huawei XH321 V3 (Intel Xeon E5-2699A v4)

SPECfp_rate2006 = 1140

CPU2006 license: 3175

Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Apr-2016

Tested by: Huawei

Software Availability: Sep-2016

Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 3.31 08/22/2016
Memory:
16x Samsung M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec17/libs/32:/spec17/libs/64:/spec17/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

Huawei XH321 V3 (Intel Xeon E5-2699A v4)

SPECfp_rate2006 = 1140

CPU2006 license: 3175

Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Apr-2016

Tested by: Huawei

Software Availability: Sep-2016

Base Portability Flags (Continued)

```
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1140

Huawei XH321 V3 (Intel Xeon E5-2699A v4)

SPECfp_rate_base2006 = 1120

CPU2006 license: 3175

Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Apr-2016

Tested by: Huawei

Software Availability: Sep-2016

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
  450.soplex: -D_FILE_OFFSET_BITS=64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64
```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
  -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -fno-alias -auto-ilp32
  -qopt-mem-layout-trans=3
```

447.dealII: basepeak = yes

```
450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
  -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -qopt-malloc-options=3
  -qopt-mem-layout-trans=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1140

Huawei XH321 V3 (Intel Xeon E5-2699A v4)

SPECfp_rate_base2006 = 1120

CPU2006 license: 3175

Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Apr-2016

Tested by: Huawei

Software Availability: Sep-2016

Peak Optimization Flags (Continued)

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

459.GemsFDTD: Same as 437.leslie3d

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1140

Huawei XH321 V3 (Intel Xeon E5-2699A v4)

SPECfp_rate_base2006 = 1120

CPU2006 license: 3175

Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Apr-2016

Tested by: Huawei

Software Availability: Sep-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Jun 12 18:39:00 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 June 2017.