



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8180, 2.50GHz

SPECint®\_rate2006 = Not Run

SPECint\_rate\_base2006 = 10500

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

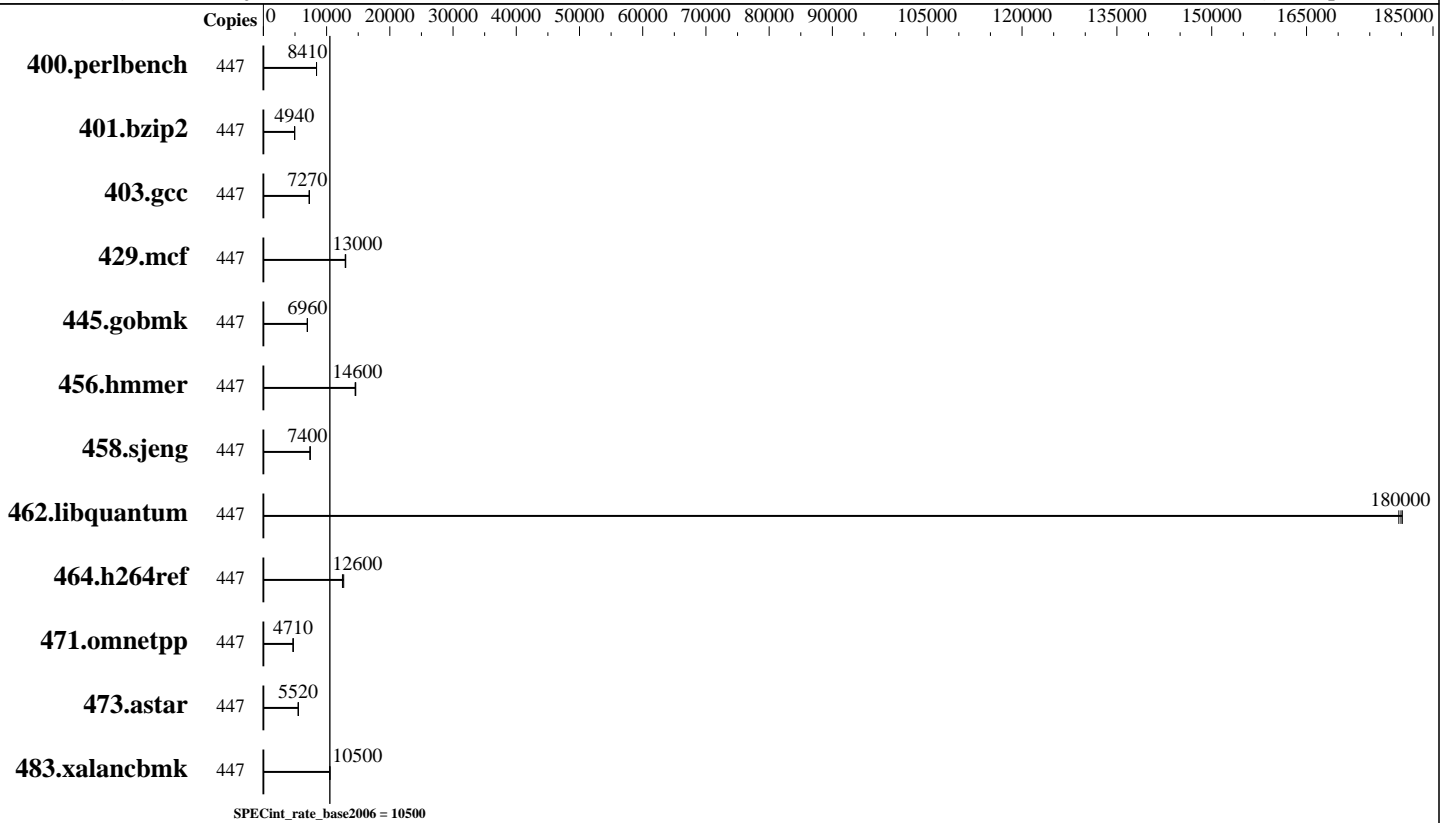

### Hardware

CPU Name: Intel Xeon Platinum 8180  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 224 cores, 8 chips, 28 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4,6,8 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 38.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 3 TB (96 x 32 GB 2Rx4 PC4-2666V-R)  
 Disk Subsystem: 6044 GB tmpfs  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2  
 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++  
 Compiler for Linux  
 Auto Parallel: No  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8180, 2.50GHz

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 10500

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jun-2017  
Hardware Availability: Jul-2017  
Software Availability: Apr-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	447	<u>519</u>	<u>8410</u>	520	8410	519	8410							
401.bzip2	447	<u>873</u>	<u>4940</u>	871	4950	873	4940							
403.gcc	447	496	7260	<u>495</u>	<u>7270</u>	495	7270							
429.mcf	447	313	13000	315	12900	<u>314</u>	<u>13000</u>							
445.gobmk	447	674	6960	<u>674</u>	<u>6960</u>	674	6960							
456.hammer	447	285	14600	<u>286</u>	<u>14600</u>	287	14500							
458.sjeng	447	731	7400	<u>731</u>	<u>7400</u>	732	7390							
462.libquantum	447	<u>51.5</u>	<u>180000</u>	51.6	180000	51.4	180000							
464.h264ref	447	791	12500	778	12700	<u>786</u>	<u>12600</u>							
471.omnetpp	447	<u>593</u>	<u>4710</u>	593	4710	593	4710							
473.astar	447	569	5520	568	5530	<u>568</u>	<u>5520</u>							
483.xalancbmk	447	295	10500	293	10500	<u>293</u>	<u>10500</u>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```

Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-447 isolcpus=1-447
Turbo mode set with:
cpupower -c all frequency-set -g performance
Tmpfs filesystem can be set with:
mkdir /home/memory
mount -t tmpfs -o size=6044g,rw tmpfs /home/memory
Process tuning setting:
echo 1000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 1500000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
echo always > /sys/kernel/mm/transparent_hugepage/enabled
cpu idle state set with:
cpupower idle-set -d 2
cpupower idle-set -d 3

```

## Platform Notes

BIOS configuration:  
Intel Virtualization Technology = Disabled  
Enable CPU HWPM = Disabled

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8180, 2.50GHz

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 10500

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jun-2017  
Hardware Availability: Jul-2017  
Software Availability: Apr-2017

### Platform Notes (Continued)

Override OS Energy Performance = Enabled  
Utilization Profile = Unbalanced  
Stale AtoS = Enabled  
LLC dead line alloc = Disabled  
Sysinfo program /home/memory/SPECcpu/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-k55j Sun Jun 25 04:26:57 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
 8 "physical id"s (chips)
 448 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 28
  siblings  : 56
 physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
 25 26 27 28 29 30
 physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
 25 26 27 28 29 30
 physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
 25 26 27 28 29 30
 physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
 25 26 27 28 29 30
 physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
 25 26 27 28 29 30
 physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
 25 26 27 28 29 30
 physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
 25 26 27 28 29 30
 physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
 25 26 27 28 29 30
cache size : 39424 KB
```

```
From /proc/meminfo
MemTotal: 3169249540 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8180, 2.50GHz

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 10500

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jun-2017  
Hardware Availability: Jul-2017  
Software Availability: Apr-2017

### Platform Notes (Continued)

```
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-k55j 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 25 04:19
```

```
SPEC is set to: /home/memory/SPECcpu
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs           tmpfs    6.0T   7.0G  5.9T   1% /home/memory
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU V1.0.0.0 R0.43.5 for D9989-B2x          06/23/2017
Memory:
96x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/memory/SPECcpu/lib/ia32:/home/memory/SPECcpu/lib/intel64:/home/memory/SPECcpu/sh10.2"
```

```
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

### Base Compiler Invocation

C benchmarks:  
icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMEQUEST 3800B, Intel Xeon Platinum 8180,  
2.50GHz

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 10500

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jun-2017  
Hardware Availability: Jul-2017  
Software Availability: Apr-2017

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.xml>



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8180,  
2.50GHz

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 10500

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jun-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Mon Oct 2 17:05:11 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 July 2017.