



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]_rate2006 = 1500

Huawei CH121 V5 (Intel Xeon Gold 6148)

SPECfp_rate_base2006 = 1460

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: May-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

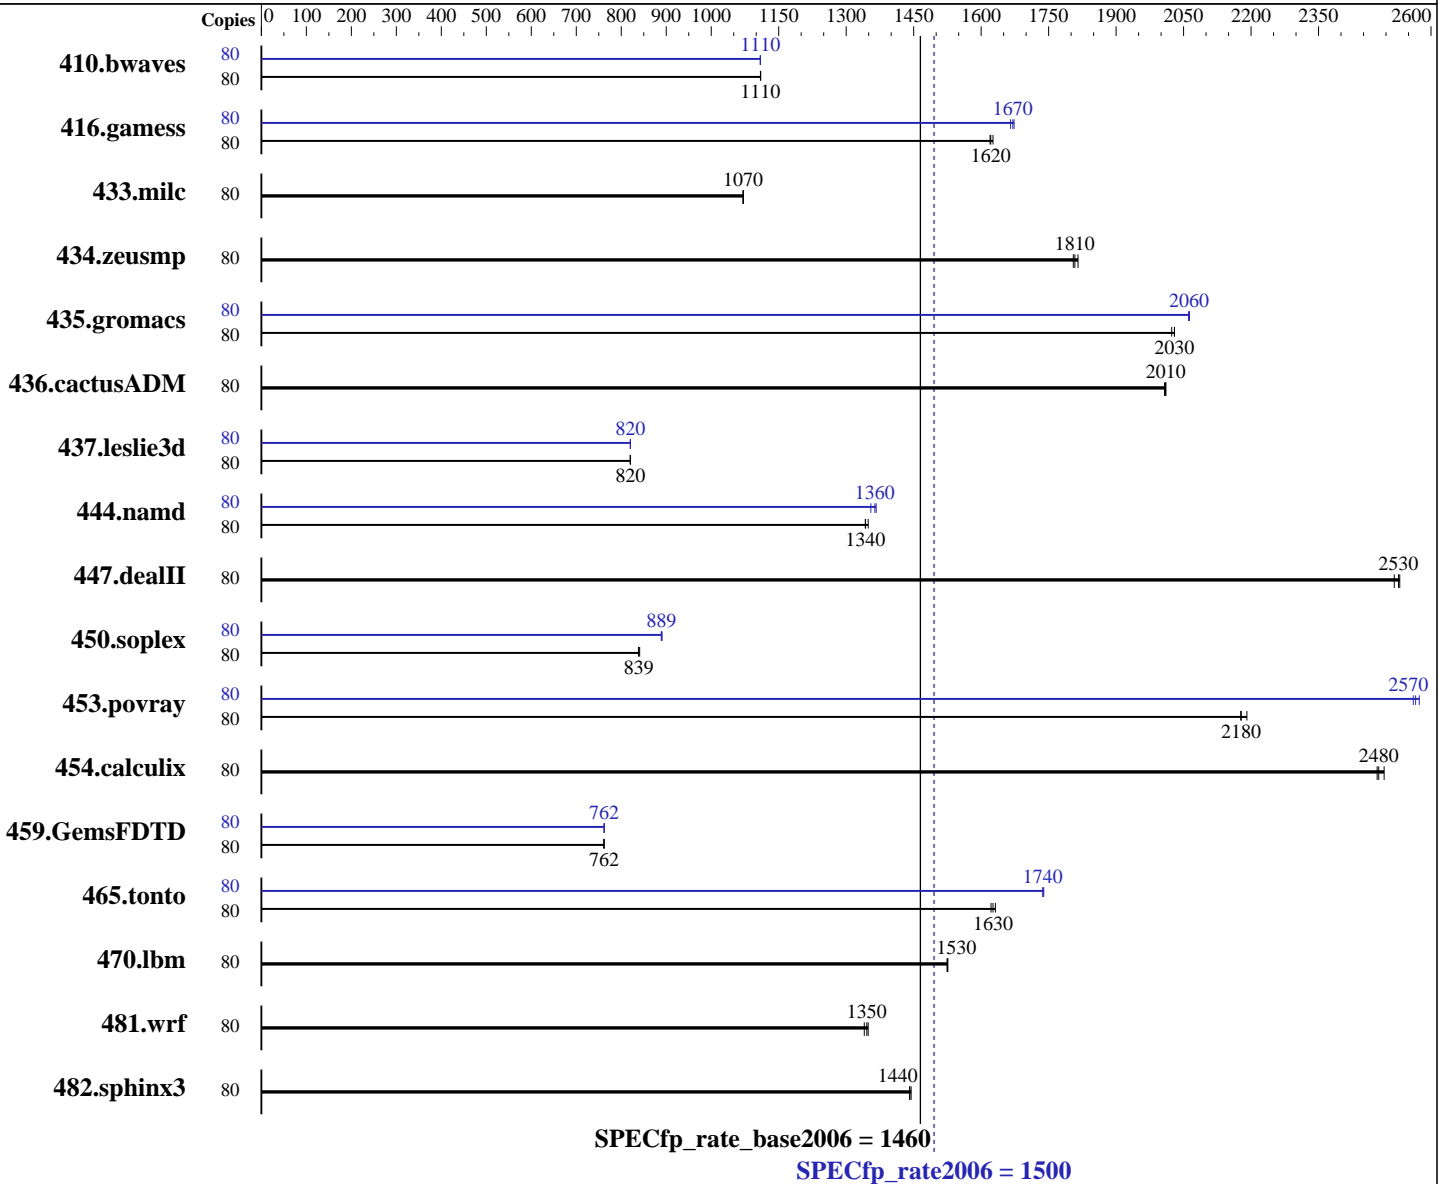

Hardware

CPU Name: Intel Xeon Gold 6148
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 40 cores, 2 chips, 20 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 3.10.0-514.el7.x86_64
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Auto Parallel: No
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1500

Huawei CH121 V5 (Intel Xeon Gold 6148)

SPECfp_rate_base2006 = 1460

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

L3 Cache: 27.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Disk Subsystem: 1 x 1200 GB SAS, 10000 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	980	1110	980	1110	980	1110	80	980	1110	980	1110	980	1110
416.gamess	80	967	1620	963	1630	966	1620	80	938	1670	941	1670	936	1670
433.milc	80	686	1070	686	1070	686	1070	80	686	1070	686	1070	686	1070
434.zeusmp	80	401	1820	403	1800	403	1810	80	401	1820	403	1800	403	1810
435.gromacs	80	281	2030	281	2030	282	2020	80	277	2060	277	2060	277	2060
436.cactusADM	80	476	2010	475	2010	476	2010	80	476	2010	475	2010	476	2010
437.leslie3d	80	916	821	917	820	917	820	80	917	820	917	820	917	820
444.namd	80	478	1340	478	1340	476	1350	80	470	1360	469	1370	474	1350
447.dealII	80	363	2520	362	2530	362	2530	80	363	2520	362	2530	362	2530
450.soplex	80	796	838	795	839	793	841	80	749	891	750	889	750	889
453.povray	80	194	2190	195	2180	195	2180	80	165	2570	166	2570	166	2560
454.calculix	80	264	2500	266	2480	266	2480	80	264	2500	266	2480	266	2480
459.GemsFDTD	80	1114	762	1114	762	1115	761	80	1114	762	1114	762	1114	762
465.tonto	80	485	1620	482	1630	484	1630	80	453	1740	453	1740	453	1740
470.lbm	80	721	1520	720	1530	720	1530	80	721	1520	720	1530	720	1530
481.wrf	80	663	1350	667	1340	664	1350	80	663	1350	667	1340	664	1350
482.sphinx3	80	1082	1440	1082	1440	1080	1440	80	1082	1440	1082	1440	1080	1440

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Performance
Set SNC to Enable

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1500

Huawei CH121 V5 (Intel Xeon Gold 6148)

SPECfp_rate_base2006 = 1460

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2017
Hardware Availability: Aug-2017
Software Availability: Nov-2016

Platform Notes (Continued)

Set IMC Interleaving to 1 way
Set Patrol Scrub to Disable
Sysinfo program /spec17/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on localhost.localdomain Sat May 20 19:31:01 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz
 2 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 20
  siblings     : 40
  physical 0   : cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
  physical 1   : cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
cache size     : 28160 KB
```

```
From /proc/meminfo
MemTotal:      394144692 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 18 17:01

```
SPEC is set to: /spec17
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   262G  85G  177G  33% /
```

Additional information from dmidecode:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1500

Huawei CH121 V5 (Intel Xeon Gold 6148)

SPECfp_rate_base2006 = 1460

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.10 02/14/2017

Memory:

24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec17/libs/32:/spec17/libs/64:/spec17/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1500

Huawei CH121 V5 (Intel Xeon Gold 6148)

SPECfp_rate_base2006 = 1460

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2017
Hardware Availability: Aug-2017
Software Availability: Nov-2016

Base Portability Flags (Continued)

```
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1500

Huawei CH121 V5 (Intel Xeon Gold 6148)

SPECfp_rate_base2006 = 1460

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2017
Hardware Availability: Aug-2017
Software Availability: Nov-2016

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

```

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
         -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -fno-alias -auto-ilp32
         -qopt-mem-layout-trans=3
447.dealII: basepeak = yes
450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
         -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -qopt-malloc-options=3
         -qopt-mem-layout-trans=3
453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
         -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1500

Huawei CH121 V5 (Intel Xeon Gold 6148)

SPECfp_rate_base2006 = 1460

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-SKL-V1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-SKL-V1.6.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 25 15:51:37 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 July 2017.