



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 1140

PowerEdge R640 (Intel Xeon Gold 6126, 2.60 GHz)

SPECfp_rate_base2006 = 1120

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2017

Hardware Availability: Jul-2017

Software Availability: Nov-2016

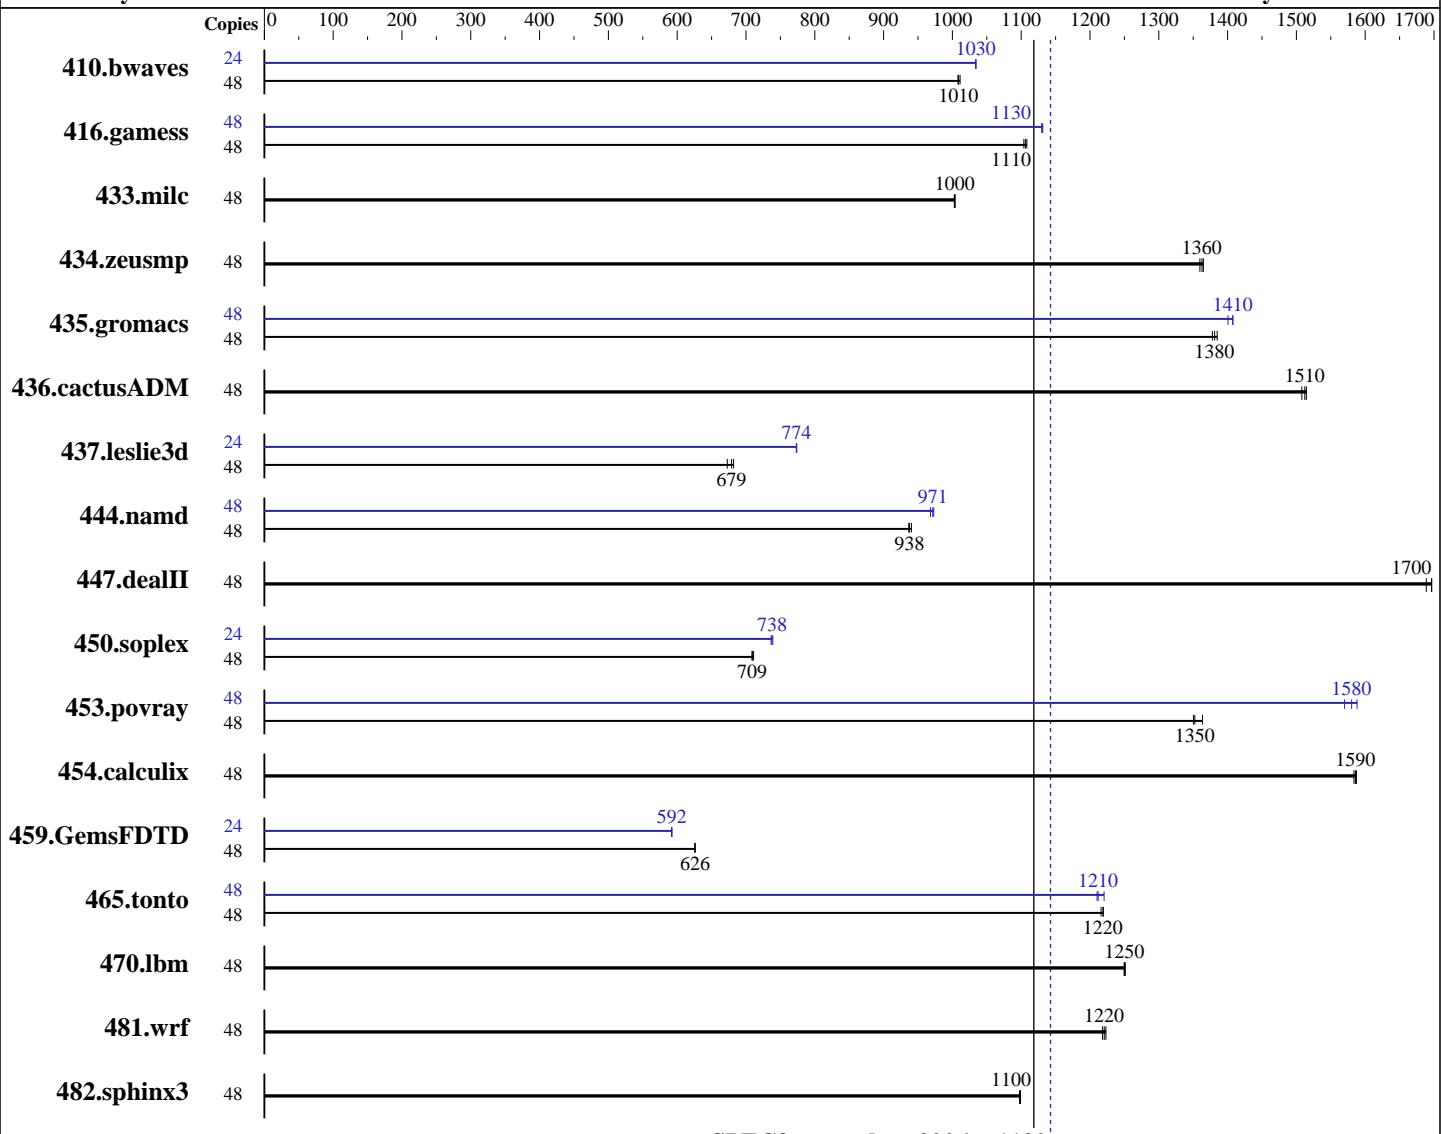

SPECfp_rate_base2006 = 1120

SPECfp_rate2006 = 1140

Hardware

CPU Name: Intel Xeon Gold 6126
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1140

PowerEdge R640 (Intel Xeon Gold 6126, 2.60 GHz)

SPECfp_rate_base2006 = 1120

CPU2006 license: 55

Test date: May-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

L3 Cache: 19.25 MB I+D on chip per chip
 Other Cache: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Disk Subsystem: 1 x 400 GB SATA SSD
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	645	1010	647	1010	647	1010	24	315	1030	315	1030	315	1030
416.gamess	48	848	1110	850	1110	851	1100	48	832	1130	832	1130	831	1130
433.milc	48	439	1000	439	1000	439	1000	48	439	1000	439	1000	439	1000
434.zeusmp	48	321	1360	320	1360	321	1360	48	321	1360	320	1360	321	1360
435.gromacs	48	249	1380	248	1380	247	1380	48	245	1400	244	1410	243	1410
436.cactusADM	48	379	1510	379	1510	380	1510	48	379	1510	379	1510	380	1510
437.leslie3d	48	664	679	671	673	662	682	24	292	774	292	774	292	773
444.namd	48	409	940	411	938	411	937	48	398	968	396	971	396	973
447.dealII	48	324	1700	325	1690	324	1700	48	324	1700	325	1690	324	1700
450.soplex	48	565	709	564	709	563	711	24	271	738	271	739	272	736
453.povray	48	189	1350	189	1350	187	1360	48	162	1580	161	1590	163	1570
454.calculix	48	250	1590	249	1590	250	1580	48	250	1590	249	1590	250	1580
459.GemsFDTD	48	814	626	813	626	814	626	24	430	592	430	592	430	592
465.tonto	48	388	1220	387	1220	388	1220	48	387	1220	390	1210	390	1210
470.lbm	48	527	1250	528	1250	528	1250	48	527	1250	528	1250	528	1250
481.wrf	48	440	1220	439	1220	438	1220	48	440	1220	439	1220	438	1220
482.sphinx3	48	852	1100	852	1100	851	1100	48	852	1100	852	1100	851	1100

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
 Sub NUMA Cluster enabled
 Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1140

PowerEdge R640 (Intel Xeon Gold 6126, 2.60 GHz)

SPECfp_rate_base2006 = 1120

CPU2006 license: 55

Test date: May-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Platform Notes (Continued)

```
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to autonomous
C1E disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Logical Processor enabled
CPU Interconnect Bus Link Power Management disabled
PCI ASPM L1 Link Power Management disabled
Sysinfo program /root/cpu2006-1.2_icl7u3/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-zadj Thu May 25 19:27:28 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6126 CPU @ 2.60GHz
        2 "physical id"s (chips)
        48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 12
        siblings : 24
        physical 0: cores 0 1 3 4 5 6 8 9 10 11 12 13
        physical 1: cores 0 1 3 5 6 8 9 10 11 12 13 14
cache size : 19712 KB
```

```
From /proc/meminfo
MemTotal:      394863120 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R640 (Intel Xeon Gold 6126, 2.60 GHz)

SPECfp_rate2006 = 1140

CPU2006 license: 55

Test date: May-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Platform Notes (Continued)

```
ID="sles"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:  
Linux linux-zadj 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016  
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 25 10:14
```

```
SPEC is set to: /root/cpu2006-1.2_icl7u3  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
/dev/sda3        xfs   368G   22G  347G   6% /  
Additional information from dmidecode:
```

```
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.
```

```
BIOS Dell Inc. 0.5.7 05/05/2017
```

```
Memory:
```

```
10x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666 MHz  
14x 00AD063200AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666 MHz
```

```
(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2_icl7u3/lib/ia32:/root/cpu2006-1.2_icl7u3/lib/intel64:/root/cpu2006-1.2_icl7u3/sh10.2"
```

```
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2
```

```
Transparent Huge Pages enabled by default
```

```
Filesystem page cache cleared with:
```

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run  
runcspec command invoked through numactl i.e.:  
numactl --interleave=all runcspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R640 (Intel Xeon Gold 6126, 2.60 GHz)

SPECfp_rate2006 = 1140

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2017

Hardware Availability: Jul-2017

Software Availability: Nov-2016

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R640 (Intel Xeon Gold 6126, 2.60 GHz)

SPECfp_rate2006 = 1140

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2017

Hardware Availability: Jul-2017

Software Availability: Nov-2016

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks (except as noted below):

`icpc -m64`

450.soplex: `icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-D_FILE_OFFSET_BITS=64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`
482.sphinx3: `-DSPEC_CPU_LP64`

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R640 (Intel Xeon Gold 6126, 2.60 GHz)

SPECfp_rate2006 = 1140

CPU2006 license: 55

Test date: May-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-malloc-options=3
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1140

PowerEdge R640 (Intel Xeon Gold 6126, 2.60 GHz)

SPECfp_rate_base2006 = 1120

CPU2006 license: 55

Test date: May-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Aug 23 13:12:41 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 August 2017.