



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECfp®\_rate2006 = 864**

**SPECfp\_rate\_base2006 = 847**

CPU2006 license: 9017


Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

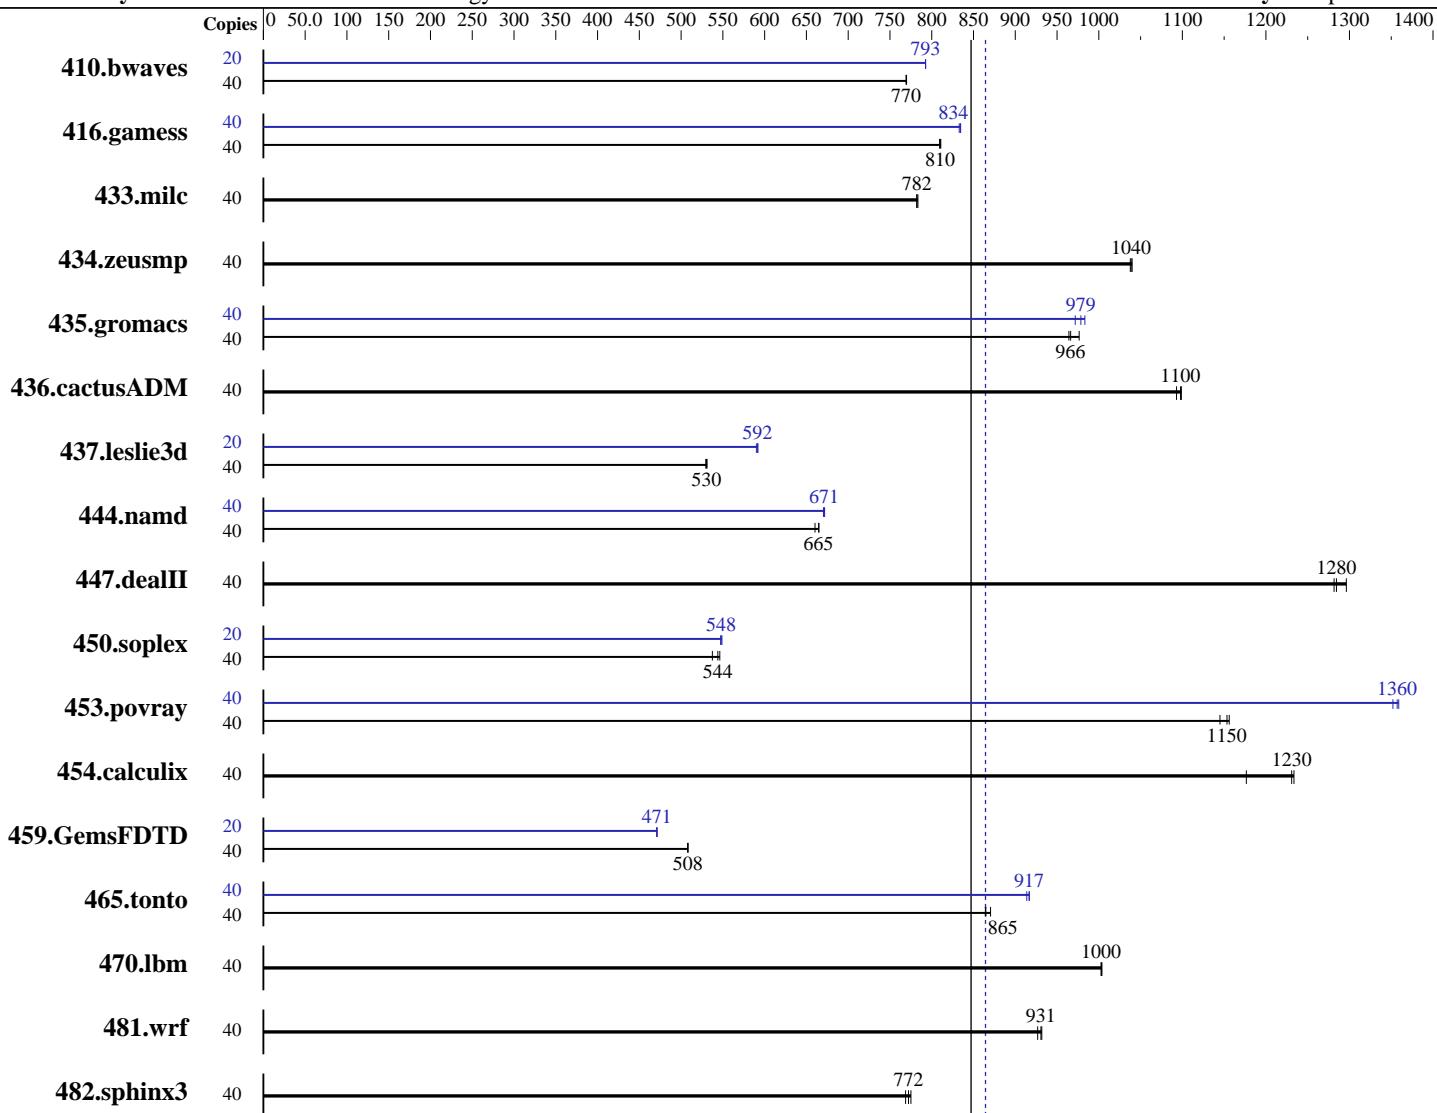

**SPECfp\_rate\_base2006 = 847**

**SPECfp\_rate2006 = 864**

### Hardware

CPU Name: Intel Xeon Gold 5115  
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
CPU MHz: 2400  
FPU: Integrated  
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
Compiler: Kernel 4.4.21-69-default  
C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
File System: Yes  
btrfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECfp\_rate2006 = 864**

**SPECfp\_rate\_base2006 = 847**

**CPU2006 license:** 9017

**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

L3 Cache: 13.75 MB I+D on chip per chip  
Other Cache: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400 MHz)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	<b>706</b>	<b>770</b>	706	770	707	769	20	343	793	343	793	<b>343</b>	<b>793</b>
416.gamess	40	966	811	<b>967</b>	<b>810</b>	968	809	40	940	833	938	835	<b>939</b>	<b>834</b>
433.milc	40	<b>469</b>	<b>782</b>	470	782	469	783	40	<b>469</b>	<b>782</b>	470	782	469	783
434.zeusmp	40	351	1040	350	1040	<b>350</b>	<b>1040</b>	40	351	1040	350	1040	<b>350</b>	<b>1040</b>
435.gromacs	40	292	976	<b>296</b>	<b>966</b>	296	964	40	<b>292</b>	<b>979</b>	290	983	294	972
436.cactusADM	40	437	1090	435	1100	<b>435</b>	<b>1100</b>	40	437	1090	435	1100	<b>435</b>	<b>1100</b>
437.leslie3d	40	708	531	710	530	<b>709</b>	<b>530</b>	20	<b>318</b>	<b>592</b>	319	590	318	592
444.namd	40	482	665	486	660	<b>483</b>	<b>665</b>	40	<b>478</b>	<b>671</b>	478	670	478	672
447.dealII	40	353	1300	<b>356</b>	<b>1280</b>	357	1280	40	353	1300	<b>356</b>	<b>1280</b>	357	1280
450.soplex	40	621	537	<b>613</b>	<b>544</b>	611	546	20	<b>304</b>	<b>548</b>	305	547	304	549
453.povray	40	184	1160	186	1150	<b>184</b>	<b>1150</b>	40	157	1350	157	1360	<b>157</b>	<b>1360</b>
454.calculix	40	280	1180	<b>268</b>	<b>1230</b>	268	1230	40	280	1180	<b>268</b>	<b>1230</b>	268	1230
459.GemsFDTD	40	836	508	835	508	<b>835</b>	<b>508</b>	20	<b>450</b>	<b>471</b>	451	471	450	471
465.tonto	40	<b>455</b>	<b>865</b>	455	864	452	870	40	<b>429</b>	<b>917</b>	431	914	429	917
470.lbm	40	<b>548</b>	<b>1000</b>	548	1000	548	1000	40	<b>548</b>	<b>1000</b>	548	1000	548	1000
481.wrf	40	482	927	<b>480</b>	<b>931</b>	480	932	40	482	927	<b>480</b>	<b>931</b>	480	932
482.sphinx3	40	1014	769	<b>1010</b>	<b>772</b>	1006	775	40	1014	769	<b>1010</b>	<b>772</b>	1006	775

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Execute Disable Bit set to Disable

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECfp\_rate2006 = 864**

**SPECfp\_rate\_base2006 = 847**

**CPU2006 license:** 9017

**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

## Platform Notes (Continued)

```
DCU Streamer Prefetcher set to Disable
XPT Prefetcher set to Disable
Stale AtoS set to Enable
LLC dead line alloc set to Disable
Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on ST550 Mon Aug 28 18:10:56 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 5115 CPU @ 2.40GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 14080 KB
```

```
From /proc/meminfo
MemTotal:      395883500 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux ST550 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 28 18:09

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECfp\_rate2006 = 864**

**SPECfp\_rate\_base2006 = 847**

**CPU2006 license:** 9017

**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

## Platform Notes (Continued)

```
SPEC is set to: /home/cpu2006-1.2-ic17.0u3
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdb2        btrfs  744G  119G  623G  16% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[00E105R-1.00]- 04/27/2017

Memory:

12x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666 MHz, configured at 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECfp\_rate2006 = 864**

**SPECfp\_rate\_base2006 = 847**

**CPU2006 license:** 9017

**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECfp\_rate2006 = 864**

**SPECfp\_rate\_base2006 = 847**

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -D\_FILE\_OFFSET\_BITS=64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32  
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECfp\_rate2006 = 864**

**SPECfp\_rate\_base2006 = 847**

**CPU2006 license:** 9017

**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECfp\_rate2006 = 864**

**SPECfp\_rate\_base2006 = 847**

**CPU2006 license:** 9017

**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 20 11:03:51 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 September 2017.