



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Platinum 8158, 3.00GHz)

**SPECint®\_rate2006 = 1580**

**SPECint\_rate\_base2006 = 1490**

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

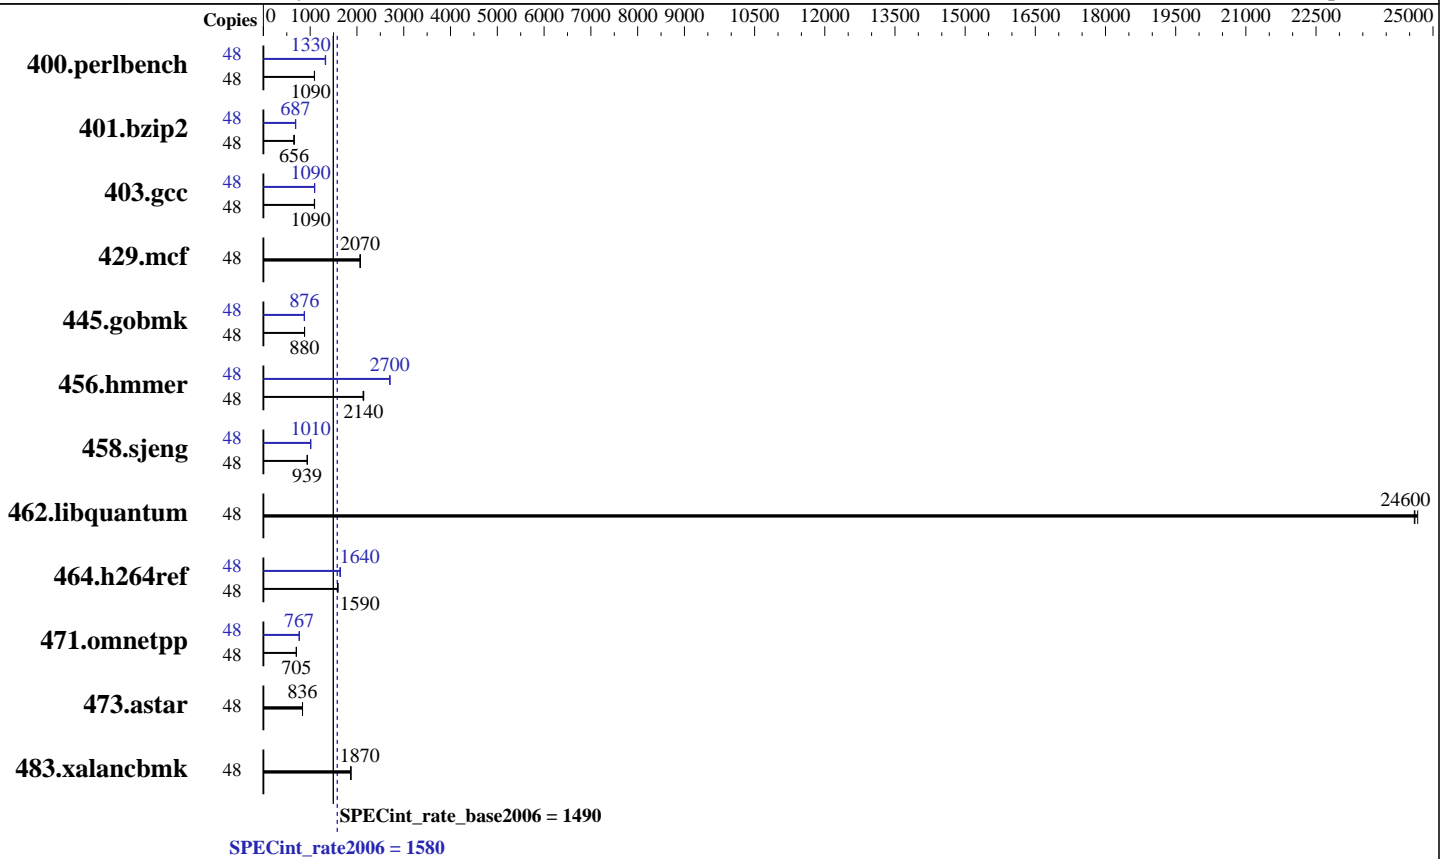

### Hardware

CPU Name: Intel Xeon Platinum 8158  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 24.75 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)  
 Disk Subsystem: 1 x 600 GB SAS 10K RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64) 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Platinum 8158, 3.00GHz)

SPECint\_rate2006 = 1580

SPECint\_rate\_base2006 = 1490

CPU2006 license: 9019  
Test sponsor: Cisco Systems  
Tested by: Cisco Systems

Test date: Aug-2017  
Hardware Availability: Aug-2017  
Software Availability: Apr-2017

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	430	1090	<u>429</u>	<u>1090</u>	429	1090	48	354	1320	<u>354</u>	<u>1330</u>	352	1330
401.bzip2	48	708	654	<u>707</u>	<u>656</u>	703	659	48	670	692	676	685	<u>674</u>	<u>687</u>
403.gcc	48	354	1090	<u>353</u>	<u>1090</u>	353	1090	48	<u>353</u>	<u>1090</u>	352	1100	354	1090
429.mcf	48	212	2060	<u>211</u>	<u>2070</u>	211	2070	48	212	2060	<u>211</u>	<u>2070</u>	211	2070
445.gobmk	48	<u>572</u>	<u>880</u>	573	879	572	881	48	575	876	574	877	<u>575</u>	<u>876</u>
456.hammer	48	209	2150	<u>209</u>	<u>2140</u>	210	2130	48	166	2710	<u>166</u>	<u>2700</u>	166	2700
458.sjeng	48	619	939	619	938	<u>619</u>	<u>939</u>	48	<u>574</u>	<u>1010</u>	575	1010	574	1010
462.libquantum	48	40.4	24600	40.3	24700	<u>40.4</u>	<u>24600</u>	48	40.4	24600	40.3	24700	<u>40.4</u>	<u>24600</u>
464.h264ref	48	<u>668</u>	<u>1590</u>	666	1590	669	1590	48	645	1650	649	1640	<u>646</u>	<u>1640</u>
471.omnetpp	48	<u>426</u>	<u>705</u>	426	704	425	706	48	391	767	<u>391</u>	<u>767</u>	391	768
473.astar	48	403	837	403	835	<u>403</u>	<u>836</u>	48	403	837	403	835	<u>403</u>	<u>836</u>
483.xalancbmk	48	<u>177</u>	<u>1870</u>	178	1870	177	1870	48	<u>177</u>	<u>1870</u>	178	1870	177	1870

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Intel HyperThreading Technology set to Enabled  
CPU performance set to Enterprise  
Power Performance Tuning set to OS  
SNC set to Enabled  
IMC Interleaving set to 1-way Interleave  
Patrol Scrub set to Disabled  
Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-0fck Wed Aug 23 09:23:49 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Platinum 8158, 3.00GHz)

SPECint\_rate2006 = 1580

SPECint\_rate\_base2006 = 1490

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Aug-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Apr-2017

### Platform Notes (Continued)

```

2 "physical id"s (chips)
48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 12
siblings  : 24
physical 0: cores 0 1 3 9 10 16 18 19 24 25 26 27
physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26
cache size : 25344 KB

From /proc/meminfo
MemTotal:      394864324 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-0fck 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 23 09:19

SPEC is set to: /home/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   500G   39G  462G   8% /
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C220M5.3.1.1d.0.0615170645 06/15/2017
Memory:
24x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz
Continued on next page

```



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Platinum 8158, 3.00GHz)

**SPECint\_rate2006 = 1580**

**SPECint\_rate\_base2006 = 1490**

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test date:** Aug-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Apr-2017

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2/lib/ia32:/home/cpu2006-1.2/lib/intel64:/home/cpu2006-1.2/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Platinum 8158, 3.00GHz)

SPECint\_rate2006 = 1580

SPECint\_rate\_base2006 = 1490

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

## Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Platinum 8158, 3.00GHz)

**SPECint\_rate2006 = 1580**

**SPECint\_rate\_base2006 = 1490**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Aug-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Apr-2017

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmer: -xCORE-AVX512 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto-ilp32  
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2)  
-qopt-ra-region-strategy=block  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs  
-L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Platinum 8158, 3.00GHz)

**SPECint\_rate2006 = 1580**

**SPECint\_rate\_base2006 = 1490**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Aug-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Apr-2017

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Sep 20 11:07:20 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 September 2017.