



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Acer Incorporated


SPECint®\_rate2006 = 1930

Altos W2000h-W370h F4 (Intel Xeon Gold 6148)

SPECint\_rate\_base2006 = 1840

CPU2006 license: 97  
Test sponsor: Acer Incorporated  
Tested by: Acer Incorporated

Test date: Sep-2017  
Hardware Availability: Oct-2017  
Software Availability: Apr-2017

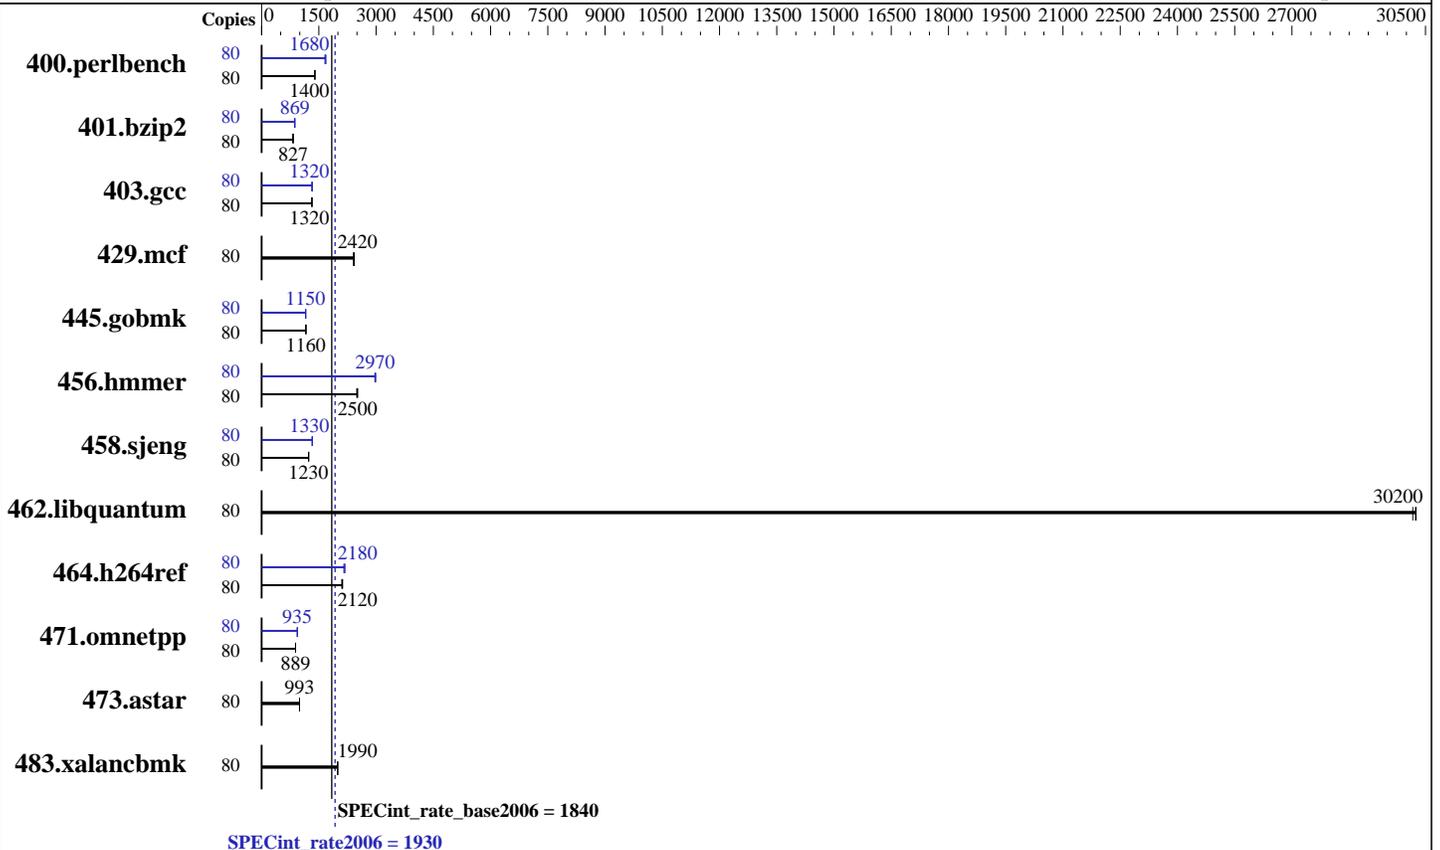

### Hardware

CPU Name: Intel Xeon Gold 6148  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 2 chips, 20 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 27.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)  
 Disk Subsystem: 1 x 4000 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2  
 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++  
 Compiler for Linux  
 Auto Parallel: Yes  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Acer Incorporated

SPECint\_rate2006 = 1930

Altos W2000h-W370h F4 (Intel Xeon Gold 6148)

SPECint\_rate\_base2006 = 1840

CPU2006 license: 97

Test date: Sep-2017

Test sponsor: Acer Incorporated

Hardware Availability: Oct-2017

Tested by: Acer Incorporated

Software Availability: Apr-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	561	1390	<b>560</b>	<b>1400</b>	559	1400	80	464	1680	471	1660	<b>466</b>	<b>1680</b>
401.bzip2	80	<b>933</b>	<b>827</b>	944	818	931	829	80	889	868	<b>889</b>	<b>869</b>	885	872
403.gcc	80	<b>488</b>	<b>1320</b>	490	1310	487	1320	80	<b>486</b>	<b>1320</b>	489	1320	485	1330
429.mcf	80	<b>301</b>	<b>2420</b>	301	2430	303	2410	80	<b>301</b>	<b>2420</b>	301	2430	303	2410
445.gobmk	80	723	1160	723	1160	<b>723</b>	<b>1160</b>	80	<b>727</b>	<b>1150</b>	727	1150	726	1160
456.hammer	80	296	2520	299	2500	<b>299</b>	<b>2500</b>	80	249	2990	251	2970	<b>251</b>	<b>2970</b>
458.sjeng	80	<b>786</b>	<b>1230</b>	786	1230	785	1230	80	<b>729</b>	<b>1330</b>	729	1330	730	1330
462.libquantum	80	54.9	30200	<b>54.8</b>	<b>30200</b>	54.8	30300	80	54.9	30200	<b>54.8</b>	<b>30200</b>	54.8	30300
464.h264ref	80	834	2120	842	2100	<b>837</b>	<b>2120</b>	80	<b>814</b>	<b>2180</b>	821	2160	812	2180
471.omnetpp	80	562	890	563	889	<b>562</b>	<b>889</b>	80	<b>534</b>	<b>935</b>	535	935	534	937
473.astar	80	565	994	<b>565</b>	<b>993</b>	565	993	80	565	994	<b>565</b>	<b>993</b>	565	993
483.xalancbmk	80	278	1990	276	2000	<b>277</b>	<b>1990</b>	80	278	1990	276	2000	<b>277</b>	<b>1990</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:

CPU Power and Performance Policy set to Performance

IMC set to 1-way interleaving

Sub\_NUMA Cluster set to enabled

Set Fan Profile set to Performance

Sysinfo program /usr/cpu2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-uibv Fri Sep 15 09:30:23 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz

2 "physical id"s (chips)

80 "processors"

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Acer Incorporated

**SPECint\_rate2006 = 1930**

Altos W2000h-W370h F4 (Intel Xeon Gold 6148)

**SPECint\_rate\_base2006 = 1840**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Sep-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

### Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 20
siblings  : 40
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
cache size : 28160 KB
```

From /proc/meminfo

```
MemTotal:      394674988 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 12 SP2
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-uibv 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Sep 15 09:25

SPEC is set to: /usr/cpu2006

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3        btrfs    3.7T  256G  3.4T   7% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C620.86B.00.01.0004.071220170215 07/12/2017

Memory:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 1930

Altos W2000h-W370h F4 (Intel Xeon Gold 6148)

SPECint\_rate\_base2006 = 1840

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Sep-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

## Platform Notes (Continued)

4x Empty/NO DIMM NO DIMM  
12x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/lib/ia32:/usr/cpu2006/lib/intel64:/usr/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 1930

Altos W2000h-W370h F4 (Intel Xeon Gold 6148)

SPECint\_rate\_base2006 = 1840

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Sep-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

## Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/shl0.2 -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECint\_rate2006 = 1930**

Altos W2000h-W370h F4 (Intel Xeon Gold 6148)

**SPECint\_rate\_base2006 = 1840**

**CPU2006 license:** 97

**Test date:** Sep-2017

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Oct-2017

**Tested by:** Acer Incorporated

**Software Availability:** Apr-2017

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmmer: -xCORE-AVX512 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto-ilp32  
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2)  
-qopt-ra-region-strategy=block  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs  
-L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 1930

Altos W2000h-W370h F4 (Intel Xeon Gold 6148)

SPECint\_rate\_base2006 = 1840

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Sep-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.3-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.3-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Feb 23 17:26:54 2018 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 October 2017.